

Offering a host of capabilities unique to Ethernet-based CPE, the AccessEtherLinX is the price/performance market leader.

Small Footprint, Full-Featured

- Read/write 802.1Q VLAN-tags on a per-port basis
- QoS: 802.1p-based packet prioritization
- Allows configuration via Telnet, serial port (CRAFT) or SNMP (iView²)
- Remote software upgrades
- Set bi-directional bandwidth control
- Supports IGMP multicast pruning
- Includes RMON statistics

Integrated Solution

- Lowers the cost of provisioning fiber services
- Optical demarcation and active switching
- SNMP-Manageable

Secure Solution

- VLAN-tagging segregates customer traffic
- Managed only through the Uplink port

Flexible Solution

- Available with three or four downlink ports
- Available for single-strand fiber and CWDM fiber

Two Versions:

AccessEtherLinX/4

- Four 10/100 twisted pair Ethernet downlink ports (for connecting users/LANs)
- One uplink port (either 100Base-FX fiber or 10/100 twisted pair)
- An internal AC power supply.

AccessEtherLinX/3

- Three 10/100 twisted pair downlink ports (for connecting users/LANs)
- One uplink port (either 100Base-FX fiber or 10/100 twisted pair)
- A universal, external, switching AC power cube with a country-specific power clip
- Table-top or wall-mount installation
- Order with the uplink port on the back or the front of the unit.




The AccessEtherLinX enables service providers to offer differentiated, "Transparent LAN" services to multi-tenant building and business customers. Residing at the customer premises, the AccessEtherLinX provides a VLAN-based, Layer 2 entry point to the last mile fiber network, trunking, differentiating and separating customer traffic.

Featuring SNMP management, 802.1Q VLAN, 802.1p QoS, traffic prioritization, bandwidth control and multicast pruning/snooping (using IGMP v1, v2), the AccessEtherLinX is perfect for a wide range of Fiber-to-the-Home, Fiber-to-the-Curb and Fiber-to-the-Business (collectively "FTTx") services, and is an ideal solution for delivering those Ethernet based services to customers quickly and cost-effectively. Designed with a small footprint, the AccessEtherLinX facilitates easy installation inside the premises.

Bandwidth control and 802.1Q VLAN compatibility built-in: The AccessEtherLinX accepts traffic containing VLAN tags on the Uplink port and directs traffic to the twisted pair downlink ports or to management based on VLAN ID. In addition to assigning 802.1Q VLAN-tags on a per-port basis, priority can be defined for each port and SNMP tag; traffic is divided into a hi/low level for packet prioritization in the queue. The AccessEtherLinX also includes bi-directional bandwidth control, and supports IGMP multicast pruning to ensure the necessary amount of IP multicast packets are bridged.

Application Example

For residential and commercial fiber services, install the AccessEtherLinX inside the customer premises to provide a bridge between the customer and service provider networks. Multiple services can be connected to the same AccessEtherLinX.

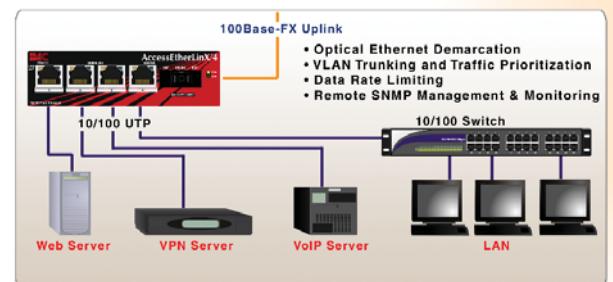

OPTICAL ACCESS

Technical Specifications

Ethernet Types supported:

- IEEE 802.3i Ethernet 10Base-T
- IEEE 802.3u Fast Ethernet (100Base-TX and 100Base-FX)
- Features Auto-Negotiation and Selective Advertising
- Supports Half and Full-Duplex operation
- Includes bi-directional bandwidth control
- Read/write IEEE 802.1Q VLAN-tags
- QoS - IEEE 802.1p-based packet prioritization (two queues [high/low] with eight priority levels)
- Supports IGMP multicast pruning (v1/v2)
- Layer 2 packet switching, store and forward operation
- Includes LinkLoss and FiberAlert
- Forwarding rate: 14,880pps for 10 Mbps; 148,800pps for 100 Mbps
- 1024 MAC address learning
- MTU: Supports over-sized packets up to 1916 bytes

Management

- Includes GUI-based iView² software
- SNMP V1 and V2c compatible
- Supports Telnet and RS-232 Craft
- Managed through uplink
- IEEE 802.3x compliant for Flow Control
- Includes loopback test modes (MAC Swap)
- Includes DHCP and TFTP clients for remote management and upgrades
- Includes diagnostic LEDs

IMC MIB:

- Traps (Cold Start, Warm Start, Link Up, Link Down, Authentication Failure)
- Link Status of Ports
- Port Type
- Fiber Type*
- User-Definable Name of Product
- User-Definable ID/Name for Ports
- Enable/Disable Ports
- Enable/Disable FiberAlert
- Set for Auto-Negotiation/Selective Advertising
- Force speed and Duplex Mode for twisted pair ports

MIB-II (RFC 1213):

- Packets Transmitted
- Packets Received
- Octets (bytes) Transmitted
- Octets (bytes) Received
- Unicast Packets Transmitted
- Unicast Packets Received
- Non-Unicast Packets Transmitted
- Non-Unicast Packets Received
- Errors Received
- Plus All Standard MIB II Objects

RMON Statistics:

- Drop Events
- Collisions
- Total Bytes
- Total Packets
- Fragments
- Jabbers
- Broadcast Packets

- Multicast Packets
- CRC Align Errors
- Under & oversize Packets
- Distribution of Frame Size

Transmission Dot 3 (RFC1643):

- Alignment Errors
- Single Collision Frames
- CRC Errors
- SQE Test Errors
- Late Collisions
- Frame Too Long
- Excessive Collisions
- Deferred Transmissions
- Multiple Collision Frames

Physical Specifications

- 50/125µm or 62.5/125µm multi-mode fiber
- 9/125µm single-mode fiber
- Available for single-strand fiber and CWDM fiber
- AutoCross for automatic MDI-II/MDI-X switching

Connectors:

RJ-45, and ST, SC or MT-RJ

Regulatory Approvals:

FCC Class A
UL/cUL, CSA
CE

Operating Temperature:

32° to 122°F (0° to 50°C)

AE/3 AC Adaptor:

32° to 104°F (0° to 40°C)

Storage Temperature:

-13° to 158°F (-25° to 70°C)

Humidity:

5 to 90% (non-condensing)

Altitude:

0 to 10,000 ft.

Dimensions

AE/3:

0.92"H x 3.50"W x 4.38"D
(2.34 cm x 8.89 cm x 11.13 cm)

AE/4:

1.5" H x 4.75" W x 7.25" D
(3.18 cm x 12.07 cm x 18.42 cm)

Shipping Weight:

AE/3:

1.1 lbs. (0.50 kg)

AE/4:

1.6 lbs. (0.6 kg)

Fiber Optics Specifications

For each product listed below in the Ordering Information section, the DISTANCE represents an approximate fiber distance based on industry-standard fiber attenuation specifications. Actual distances will vary for each installation. For complete power budgets and information on calculating specific distances, visit www.imcnetworks.com/go/fcs or contact IMC Networks Fiber Consulting Services at 949-465-3000.

Ordering Information

PART NUMBER	DESCRIPTION	DISTANCE
AccessEtherLinX/4		
852-13120	TX/4 + TX	100 m
852-13121	TX/4 + FX-MM1300-ST	2 km
852-13122	TX/4 + FX-MM1300-SC	2 km
852-13123	TX/4 + FX-SM1310/PLUS-ST	40 km
852-13124	TX/4 + FX-SM1310/PLUS-SC	40 km
852-13125	TX/4 + FX-SM1310/LONG-ST	80 km
852-13126	TX/4 + FX-SM1310/LONG-SC	80 km
852-13127	TX/4 + FX-SM1550/LONG-SC	100 km
AccessEtherLinX/4 Single Strand Fiber *		
852-10133	TX4 + SSFX-SM1310-SC	20 km
852-10134	TX4 + SSFX-SM1550-SC	20 km
852-10135	TX4 + SSFX-SM1310/PLUS-SC	40 km
852-10136	TX4 + SSFX-SM1550/PLUS-SC	40 km
852-10137	TX4 + SSFX-SM1310/LONG-SC	60 km
852-10138	TX4 + SSFX-SM1550/LONG-SC	60 km

PART NUMBER	DESCRIPTION	DISTANCE
AccessEtherLinX/3 **		
852-10180	TX/3 + TX	100 m
852-10181	TX/3 + FX-MM1300-ST	2 km
852-10182	TX/3 + FX-MM1300-SC	2 km
852-10183	TX/3 + FX-SM1310/PLUS-ST	40 km
852-10184	TX/3 + FX-SM1310/PLUS-SC	40 km
852-10185	TX/3 + FX-SM1310/LONG-ST	80 km
852-10186	TX/3 + FX-SM1310/LONG-SC	80 km
852-10187	TX/3 + FX-SM1550/LONG-SC	100 km
AccessEtherLinX/3 Single Strand Fiber *		
852-10193	TX/3 + SSFX-SM1310-SC	20 km
852-10194	TX/3 + SSFX-SM1550-SC	20 km
852-10195	TX/3 + SSFX-SM1310/PLUS-SC	40 km
852-10196	TX/3 + SSFX-SM1550/PLUS-SC	40 km
852-10197	TX/3 + SSFX-SM1310/LONG-SC	60 km
852-10198	TX/3 + SSFX-SM1550/LONG-SC	60 km

* These products have single-strand fiber technology. Deploy in pairs, or connect to another compatible IMC Networks single-strand fiber product. Go to www.imcnetworks.com/products/SSFX.cfm for more information

IMC Networks

Headquarters

19772 Pauling
Foothill Ranch, CA 92610
TEL: 949-465-3000
FAX: 949-465-3020
sales@imcnetworks.com
www.imcnetworks.com

IMC Networks

Europe

Herseltsesteenweg 268
B-3200 Aarschot | Belgium
TEL: +32-16-550880
FAX: +32-16-550888
eurosales@imcnetworks.com

IMC Networks

Eastern US/Latin America

18840 US Hwy. 19 North Suite 400
Clearwater, FL 33764
TEL: 727-524-8152/524-8071 (Latin)
FAX: 727-524-8432
latinsales@imcnetworks.com

IMC Networks

Fiber Consulting Services

For information call:
TEL: 949-465-3000
1-800-624-1070 (US/CAN)
+32-16-550880 (Europe)
fcs@imcnetworks.com

Copyright © 2007 IMC Networks. All rights reserved. The information in this document is subject to change without notice. IMC Networks assumes no responsibility for any errors that may appear in this document. Specific product names may be trademarks or registered trademarks and are the property of their respective companies.