
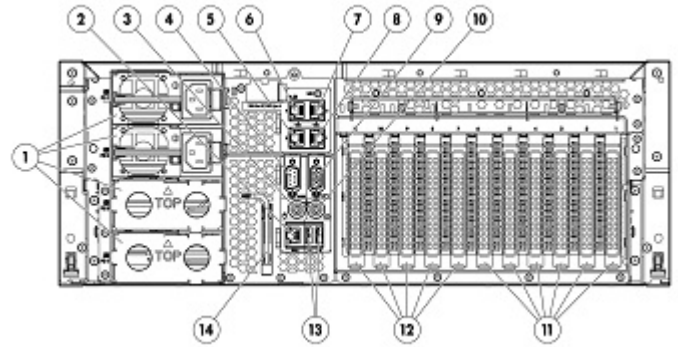


Overview

Powered by latest AMD Opteron® 8, 12 and 16 core processors, the HP ProLiant DL585 G7 is positioned as the leading price performance 4P multi-core rack mount server with the expansion capabilities to make it ideal for server virtualization, server consolidation, multi-tiered enterprise application, and corporate infrastructure applications.

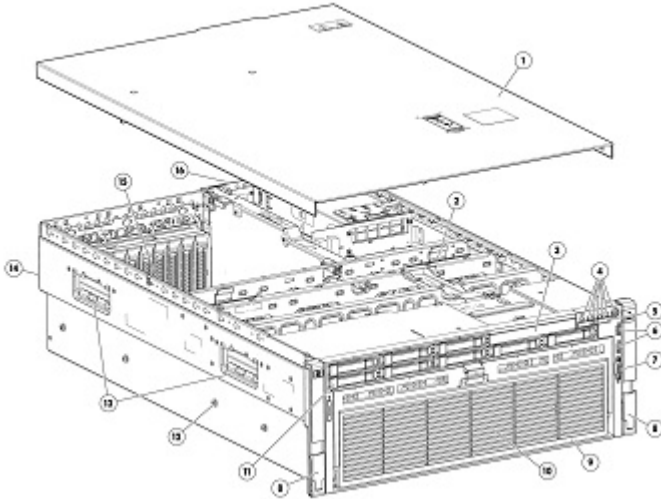

Front View:

1. Quick Removal Access Panel
2. 4 Hot Plug Redundant Fans Standard on all models
3. Slimline Drive (DVD Drive optional)
4. Front Panel LED Display and Power Button
5. Slide-out Systems Insight Display
6. Two front accessible USB 2.0 ports
7. One front video port
8. Quick release levers for fast server access
9. Front accessible Processor and memory drawer
10. Support for up to four AMD Opteron processors
11. Support for up to eight hot plug Small Form-Factor (SFF) SAS/ Serial ATA (SATA)/Solid State drives
12. Universal Tool-less "Snap In" Sliding Rail Solution
13. Server Lifting Handles
14. 4U (7" Height) Rack Form Factor
15. Up to eleven available PCI Express/PCI-X Internal Expansion Slots

Rear View:

1. Hot Plug Redundant Power supplies (2 or 4 ship depending on the model)
2. Integrated Lights-Out 3 port
3. Mouse port
4. Serial port
5. Gigabit NIC Ports
6. Gigabit NIC Ports
7. Gigabit NIC Ports
8. Gigabit NIC Ports
9. Video port
10. Keyboard port
11. PCI-Express or PCI-X option (slots 1-6)
12. PCI-Express slots (slots 7-11)
13. Two USB ports
14. Service tool

What's New

- Support for new AMD Opteron 6200 series processor refresh
- Support for HP 300GB 6G SAS Enterprise Hard Disk Drive
- 1TB max memory with support of new 16GB and 32 GB DDR3-1333 low-power memory RDIMMs



Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor

Two or four of the following depending on Model

Sixteen-Core Processors

AMD Opteron™ 6282SE (2.6GHz/16-core/16MB/140W) Processor

AMD Opteron™ 6276 (2.3GHz/16-core/16MB/115W) Processor

AMD Opteron™ 6272 (2.1GHz/16-core/16MB/115W) Processor

AMD Opteron™ 6274 (2.2GHz/16-core/16MB/115W) Processor

AMD Opteron™ 6262HE (1.6GHz/16-core/16MB/85W) Processor

Twelve-Core Processors

AMD Opteron™ 6238 (2.6GHz/12-core/16MB/115W) Processor

AMD Opteron™ 6234 (2.4GHz/12-core/16MB/115W) Processor

AMD Opteron™ 6176SE (2.3GHz/12-core/12MB/105W) Processor

AMD Opteron™ 6174 (2.2GHz/12-core/12MB/80W) Processor

AMD Opteron™ 6172 (2.1GHz/12-core/12MB/80W) Processor

AMD Opteron™ 6168 (1.9GHz/12-core/12MB/80W) Processor

AMD Opteron™ 6164HE (1.7GHz/12-core/12MB/65W) Processor

AMD Opteron™ 6166HE (1.8GHz/12-core/12MB/65W) Processor

AMD Opteron™ 6176 (2.3GHz/12-core/12MB/80W) Processor

AMD Opteron™ 6180SE (2.5GHz/12-core/12MB/105W) Processor

Eight-Core Processors

AMD Opteron™ 6220 (3.0GHz/8-core/16MB/115W) Processor

AMD Opteron™ 6212 (2.6GHz/8-core/16MB/115W) Processor

AMD Opteron™ 6128 (2.0GHz/8-core/12MB/80W) Processor

AMD Opteron™ 6132HE (2.2GHz/8-core/12MB/65W) Processor

AMD Opteron™ 6136 (2.4GHz/8-core/12MB/80W) Processor

AMD Opteron™ 6140 (2.6GHz/8-core/12MB/80W) Processor

NOTE: Processor wattage references reflect Thermal Design Power (TDP). For more information on TDP and Average CPU Power (ACP) visit: <http://www.amd.com/acp>.

NOTE: Up to 3.0GHz clock speed.

Cache Memory 16MB Level 3 cache

Chipset AMD SR5690/SP5100

Upgradeability Upgradeable to quad (4) processors
NOTE: To upgrade from 2P to 4P CPU/Memory secondary option kit needs to be bought separately. Exact part number is mentioned in the options section.
4P models already have this kit configured.



Standard Features

Memory Protection Advanced ECC capabilities
 Online Spare Memory

Memory

| | |
|-------------------------------|--|
| Type | PC3-10600R Registered DDR3 (1333MHz) |
| Standard (Performance Models) | 64GB (16x4GB) of PC3-10600 (DDR3-1333) |
| Standard (Base Models) | 32GB (8x4GB) of PC3-10600 (DDR3-1333) |
| Maximum | 1TB |

NOTE: Max memory is based on the maximum capacity of the AMD architecture.

Network Controller HP NC375i Integrated Quad Port Gigabit Server Adapter

Expansion Slots

NOTE: Up to 11 FL/FH I/O slots. 2 PCI-E 2.0x16 and 3 PCI-E 2.0 x8 slots standard.

Expansion Slots (Main IO Board standard)

| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
|-------------------|-------------|-----------|-----------------|-------------------------|-------|
| 1 | N/A | N/A | N/A | N/A | |
| 2 | N/A | N/A | N/A | N/A | |
| 3 | N/A | N/A | N/A | N/A | |
| 4 | N/A | N/A | N/A | N/A | |
| 5 | N/A | N/A | N/A | N/A | |
| 6 | N/A | N/A | N/A | N/A | |
| 7 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 8 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 9 | PCI-Express | x16 | x16 | Full Length/Full Height | |
| 10 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 11 | PCI-Express | x16 | x16 | Full Length/Full Height | |

Expansion Slots with IO Expander (combination PCI-X, PCI-e and 300W GPU)

| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
|-------------------|-------------|-----------|-----------------|-------------------------|-------|
| 1 | PCI-X | 64-bit | N/A | Full Length/Full Height | |
| 2 | PCI-X | 64-bit | N/A | Full Length/Full Height | |
| 3 | PCI-Express | x4 | x8 | Full Length/Full Height | |



Standard Features

| | | | | |
|----|-------------|-----|-----|-------------------------|
| 4 | PCI-Express | x8 | x16 | Full Length/Full Height |
| 5 | PCI-Express | x8 | x16 | Full Length/Full Height |
| 6 | PCI-Express | x16 | x16 | Full Length/Full Height |
| 7 | PCI-Express | x8 | x16 | Full Length/Full Height |
| 8 | PCI-Express | x8 | x16 | Full Length/Full Height |
| 9 | PCI-Express | x16 | x16 | Full Length/Full Height |
| 10 | PCI-Express | x8 | x16 | Full Length/Full Height |
| 11 | PCI-Express | x16 | x16 | Full Length/Full Height |

Expansion Slots with I/O Expander (standard PCI-e option)

| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
|-------------------|-------------|-----------|-----------------|-------------------------|-------|
| 1 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 2 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 3 | PCI-Express | x16 | x16 | Full Length/Full Height | |
| 4 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 5 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 6 | PCI-Express | x16 | x16 | Full Length/Full Height | |
| 7 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 8 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 9 | PCI-Express | x16 | x16 | Full Length/Full Height | |
| 10 | PCI-Express | x8 | x16 | Full Length/Full Height | |
| 11 | PCI-Express | x16 | x16 | Full Length/Full Height | |



Standard Features

Storage Controller One of the following depending on Model

| | |
|--------------------|---|
| Performance Models | HP Smart Array P410i/1G FBWC Controller |
| Base Models | HP Smart Array P410i Zero Memory Controller |

The Flash Backed Write Cache (FBWC) increases cache data retention capabilities from two days of existing battery backed write cache (BBWC) to infinite data retention.

- Standard on all Base Models
- Transportable data protection
- Increases overall controller performance

Internal Storage Devices

| | |
|---------------------------|--|
| Diskette Drive | None |
| Optical Drives | Slimline DVD Drive Standard on some models - ejectable for security and serviceability |
| Hard Drives | None standard |
| Hard Disk Drive Backplane | Internal SAS backplane supports up to eight SFF hard disk drives |
| Drive Bays | Up to 8 Small Form Factor drive bays total |

Maximum Internal Storage

| | | |
|----------------------|-------|-----------|
| Hot Plug SFF SAS | 8TB | 8 x 1TB |
| Hot Plug SFF SATA | 8TB | 8 x 1TB |
| Hot Plug SFF SSD | 3.2TB | 8 x 400GB |
| Hot Plug SFF SAS SSD | 6.4TB | 8 x 800GB |

NOTE: There is an extra internal SSD slot available as well

Interfaces

| | |
|--------------------------|--------------------------------------|
| Serial | 1 |
| Video | 1 front, 1 rear |
| Network RJ-45 (Ethernet) | 4 |
| iLO 3 Remote Management | 1 |
| Keyboard | 1 |
| Pointing Device (Mouse) | 1 |
| USB 2.0 Ports | 6 total: 2 front; 2 rear; 2 internal |

NOTE: Please see the following URL for additional information regarding USB support:
<http://h18004.www1.hp.com/products/servers/platforms/usb-support.html>



Standard Features

| | |
|------------------------------|---|
| Industry Standard Compliance | ACPI 2.0. Compliant PCI 2.0 Compliant PXE Support WOL Support Physical Address Extension (PAE) Support Microsoft® Logo certifications USB 2.0 Support |
|------------------------------|---|

| | |
|--------------------|--|
| Server Power Cords | NOTE: If customers require a local power cord, they can check the power cord matrix for the appropriate county specific sku. Please see the following power cord matrix for details: http://www.hp.com/go/powercordmatrix |
|--------------------|--|

| | |
|--------------|---|
| Power Supply | 1200W AC Power Supply NOTE: Two Hot Plug Power Supplies ships standard with 2P Models. Four Hot Plug Power Supplies ship standard with 4P Models. |
|--------------|---|

| | |
|-------------|---|
| System Fans | 4 Hot plug, redundant fans (individually removable) |
|-------------|---|

| | |
|------------------|---|
| Required Cabling | For required cabling information, refer to the HP Web site at: www.hp.com/servers/dl585 |
|------------------|---|

| | |
|--|---|
| Operating Systems and Virtualization Software Support for ProLiant Servers | Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) Oracle Solaris VMware Citrix XenServer NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Site at: www.hp.com/go/ossupport and our driver download site www.hp.com/support/DL585G7 |
|--|---|

| | |
|----------|--|
| Graphics | Integrated ATI RN-50 1600x1280x64K 16M color (32 MB DDR1 memory) |
|----------|--|

| | |
|-------------|--|
| Form Factor | Rack (4U = 7 inches), ships with sliding rails and cable management system Space saving form factor (4U) provides space efficiencies while providing maximum deployment flexibility |
|-------------|--|

| | | |
|--------------------------------|------------------------------|--|
| HP Insight management software | HP Service Pack for ProLiant | HP Service Pack for ProLiant is an enhanced, re-packaging of ProLiant systems software and firmware, but is still based on the rich legacy of ProLiant Support Packs (PSPs) and HP Smart Update Firmware DVD that are originally found in the Insight Foundation suite for ProLiant. It is a comprehensive systems software and firmware release offered as a tested |
|--------------------------------|------------------------------|--|



Standard Features

solution on all ProLiant servers supported by Insight Foundation version 8.70. It evolves beyond separate installation of HP PSPs and the HP Smart Update Firmware DVD by providing a single image that combines both of these products. It offers combined firmware and systems software packaging and improved processes for drivers, utilities, agents, non agents, and other utilities that are required to keep pace in today's rapidly expanding technology infrastructure.

Main or base releases for HP Service Pack for ProLiant are planned approximately 3 times a year, but look for interim update releases that will capture hot fixes released between main releases. HP Service Pack for ProLiant is supported on all HP ProLiant SL/ML/DL 100, 300, 500, 700, and 900 servers and BladeSystems series servers that are supported with Insight Foundation version 8.70 and will supersede and replace Insight Foundation. It is downloadable from: www.hp.com/go/server/service_packs/updates as a web only release and is not available on media.

The first release of HP Service Pack for ProLiant is Version 2011.06.0. It contains the first comprehensive collection of firmware and system software components, all tested together that include drivers, agents, non-agents, utilities, firmware packages for servers, controllers, storage, blades, enclosures, and all components and options supported by HP ProLiant Support Packs for Windows and Linux version 8.70. Additionally, VMware offline firmware updates will be included.

More information can be found at this link for HP Service Pack for ProLiant: www.hp.com/go/server/service_packs

HP Insight Foundation

Insight Foundation is being baselined at version v8.70 which means the following:

- Its Media Kit (contains 2 SmartStart CDs, the Firmware DVD, and the Management DVD) will continue to ship with all supported ProLiant G7 or earlier BTO servers until the last supported server is no longer shipping.
- The Media Kit will not be updated past version 8.70.
- ProLiant G7 or earlier CTO servers are able to order the Media Kit with the understanding that the media is not updated. Please check specific server QuickSpecs for availability of CTO Kit.
- PSP and Firmware DVD downloads will be updated through 2Q 2012 at the HP Insight Foundation Suite for ProLiant downloads tab: <http://www.hp.com/go/foundation>

Customers are urged to use the replacement product, HP Service Pack for ProLiant, instead of Insight Foundation Suite which is found at these location:

- www.hp.com/go/spp
- www.hp.com/go/spp/download

HP Integrated Lights-Out (iLO)

HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and Insight



Standard Features

Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO

| | |
|----------------------------------|--|
| Intelligent Manageability | HP Systems Insight Manager software SmartStart Redundant ROM Remote Flash ROM Management Agents Integrated Management Log (IML) Automatic Server Recovery-2 (ASR-2) ROM-Based Setup Utility (RBSU) Dynamic Sector Repairing (with Smart Array Controllers) Drive Parameter Tracking (with Smart Array Controllers) Pre-Failure Warranty (covers processors, SAS hard drives and memory) Redundant/adaptive load balancing NIC Support |
|----------------------------------|--|

| | |
|-----------------|---|
| Security | Power-on password Keyboard password Diskette drive control enable/disable Diskette boot control enable/disable External USB port enable/disable Network Server Mode Serial interface control Administrator's password Removable optical drive |
|-----------------|---|

| | |
|-----------------|---|
| Warranty | <p>This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.</p> <p>NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html.</p> |
|-----------------|---|



Optional Features

HP Insight management software

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.

Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit: <http://www.hp.com/go/insightdynamics>



Optional Features

| | | |
|----------------------------------|-------------------------------|---|
| High Performance Clusters | HP Cluster Platforms | HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters |
| | HP HPC Interconnects | High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html |
| | HP Cluster Management Utility | HP Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu |
| | HP HPC Linux Value Pack | HP HPC Linux Value Pack (Value Pack) is an HP-licensed and HP-supported specially priced software bundle for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes the Platform HPC Enterprise Edition suite of tools including the LSF workload scheduler, the HP-MPI parallelization library. Also included are the HP Unified Parallel C compiler and the HP Shmem library, as well as the execution environments for the libraries and compiler. HP HPC Linux Value Pack |

Solutions

Designed for enterprise customers running compute- or I/O intensive database and transaction applications, as well as data centers using virtualization and consolidation to reduce server sprawl, the rack optimized 4-processor HP ProLiant DL585 G7 server delivers maximum performance and high availability for highly complex, business critical applications. Specifically, the HP ProLiant DL585 G7 would be excellent for running the following types of applications:

Typical Usage:

- x86 virtualization and consolidation projects
- Electronic Design Automation (EDA)/Semiconductor
- Financial
- Large database applications
- ERP / CRM
- Petrochemical
- Life Science and Material Science
- Video Rendering



Optional Features

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eConfigure Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. For additional information please visit: <http://www.hp.com/products/configurator>



Service and Support

Service and Support

HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.

HP Technology Services meets business challenges with services offered in three packages - **Optimized Care Package, Standard Care Package, and Basic Care Package** - available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

Optimized Care

Optimized Care Package: Supports maintaining servers at optimum performance availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for SIM (Systems Insight Manager)

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack
<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

3-Year HP Critical Advantage

Provides end-to-end infrastructure support solution for business critical applications running on virtualized/x86 infrastructures, enabling the customers to cost effectively build, operate, and continuously improve their IT environment

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-1772ENW>

Additional Services: Microsoft or Linux or VMware education courses + Facility & technology environmental assessment services + Energy Efficiency Design, Factory Express



Service and Support

Standard Care

Standard Care Package: Package that maintains high level of server availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for SIM (Systems Insight Manager)

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack
<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service

Provides an IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf>

3-Year , HP 24x7 Software Support for Insight Control

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support; Install and Startup Services for Insight Control; Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express

Basic Care

Basic Care Package: delivers minimum recommended support service level

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and Software Support); +10 Proactive Select Credits, Factory Express

Insight Remote Support

The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant>



Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.

Performance Models

| | | |
|---|------------------------------|---|
| HP ProLiant DL585 G7 6282SE 4P 128GB-R Hot Plug SFF 1200W PS Server 653745-xx1 | Processors | (4) AMD Opteron™ 6282SE (2.6GHz/16-core/16MB/140W) Processors |
| | Cache Memory | 16MB L3 cache |
| | Memory | 128GB (16x8GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots. |
| | Network Controller | HP NC375i Integrated Quad Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array P410i/1G FBWC Controller |
| | Hard Drives | None ship standard |
| | Internal Storage | Up to 8TB of internal storage (SFF SAS) |
| | Optical Drive | None ship standard |
| | Power Supply | Four 1200W Power Supplies standard |
| | Fans | 4 Hot plug, redundant fans (individually removable) |
| | Integrated Lights Out | Integrated Lights-Out 3 (iLO 3) ships standard |
| | Insight Control | HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates |
| | Form Factor | 4U Rack |
| | Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

| | | |
|---|------------------------------|---|
| HP ProLiant DL585 G7 6276 4P 128GB-R Hot Plug SFF 1200W PS Server 653746-xx1 | Processors | (4) AMD Opteron™ 6276 (2.3GHz/16-core/16MB/115W) Processors |
| | Cache Memory | 16MB L3 cache |
| | Memory | 128GB (16x8GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots. |
| | Network Controller | HP NC375i Integrated Quad Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array P410i/1G FBWC Controller |
| | Hard Drives | None ship standard |
| | Internal Storage | Up to 8TB of internal storage (SFF SAS) |
| | Optical Drive | None ship standard |
| | Power Supply | Four 1200W Power Supplies standard |
| | Fans | 4 Hot plug, redundant fans (individually removable) |
| | Integrated Lights Out | Integrated Lights-Out 3 (iLO 3) ships standard |
| | Insight Control | HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates |
| | Form Factor | 4U Rack |



Pre-configured Models

Warranty Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.

| | | |
|--|--|--|
| HP ProLiant DL585 G7 6272 4P 64GB-R Hot Plug SFF 1200W PS Server 653747-xx1 | Processors | (4) AMD Opteron™ 6272 (2.1GHz/16-core/16MB/115W) Processors |
| | Cache Memory | 16MB L3 cache |
| | Memory | 64GB (8x8GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots. |
| | Network Controller | HP NC375i Integrated Quad Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array P410i/1G FBWC Controller |
| | Hard Drives | None ship standard |
| | Internal Storage | Up to 8TB of internal storage (SFF SAS) |
| | Optical Drive | None ship standard |
| | Power Supply | Four 1200W Power Supplies standard |
| | Fans | 4 Hot plug, redundant fans (individually removable) |
| | Integrated Lights Out Insight Control | Integrated Lights-Out 3 (iLO 3) ships standard HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates |
| | Form Factor | 4U Rack |
| | Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

| | | |
|--|--|--|
| HP ProLiant DL585 G7 6172 4P 32GB-R P410i/1GB FBWC 8 SFF 1200W RPS Perf IC Svr 583108-xx1 | Processors | (4) AMD Opteron™ 6172 (2.1GHz/12-core/12MB/80W) Processors |
| | Cache Memory | 12MB (1 x 12MB) L3 cache |
| | Memory | 32GB (8x4GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots. |
| | Network Controller | HP NC375i Integrated Quad Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array P410i/1G FBWC Controller |
| | Hard Drives | None ship standard |
| | Internal Storage | Up to 8TB of internal storage (SFF SAS) |
| | Optical Drive | None ship standard |
| | Power Supply | Four 1200W Power Supplies standard |
| | Fans | 4 Hot plug, redundant fans (individually removable) |
| | Integrated Lights Out Insight Control | Integrated Lights-Out 3 (iLO 3) ships standard HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates |
| | Form Factor | 4U Rack |
| | Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

| | | |
|--|---------------------|--|
| HP ProLiant DL585 G7 6174 4P 64GB-R | Processors | (4) AMD Opteron™ 6174 (2.2GHz/12-core/12MB/80W) Processors |
| | Cache Memory | 12MB (1 x 12MB) L3 cache |



Pre-configured Models

| | | |
|---|--|---|
| <p>P410i/1GB FBWC 8 SFF 1200W RPS Perf IC Svr 601362-xx1</p> | <p>Memory Network Controller Storage Controller Hard Drives Internal Storage Optical Drive Power Supply Fans Integrated Lights Out Insight Control</p> <p>Form Factor Warranty</p> | <p>64GB (16x4GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots.</p> <p>HP NC375i Integrated Quad Port Gigabit Server Adapter</p> <p>Embedded HP Smart Array P410i/1G FBWC Controller</p> <p>None ship standard</p> <p>Up to 8TB of internal storage (SFF SAS)</p> <p>None ship standard</p> <p>Four 1200W Power Supplies standard</p> <p>4 Hot plug, redundant fans (individually removable)</p> <p>Integrated Lights-Out 3 (iLO 3) ships standard</p> <p>HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates</p> <p>4U Rack</p> <p>Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.</p> |
|---|--|---|

| | | |
|---|--|--|
| <p>HP ProLiant DL585 G7 6180SE 4P 64GB-R P410i/1GB FBWC 8 SFF 1200W RPS IC Server 633964-xx1</p> | <p>Processors Cache Memory Memory Network Controller Storage Controller Hard Drives Internal Storage Optical Drive Power Supply Fans Integrated Lights Out Insight Control</p> <p>Form Factor Warranty</p> | <p>(4) AMD Opteron™ 6180SE (2.5GHz/12-core/12MB/105W) Processors</p> <p>12MB (1 x 12MB) L3 cache</p> <p>64GB (16x4GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots.</p> <p>HP NC375i Integrated Quad Port Gigabit Server Adapter</p> <p>Embedded HP Smart Array P410i,1G FBWC Controller</p> <p>None ship standard</p> <p>Up to 8TB of internal storage</p> <p>None ship standard</p> <p>Four 1200W Power Supplies standard</p> <p>4 Hot plug, redundant fans (individually removable)</p> <p>Integrated Lights-Out 3 (iLO 3) ships standard</p> <p>HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates</p> <p>4U Rack</p> <p>Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.</p> |
|---|--|--|

| | | |
|---|---|--|
| <p>HP ProLiant DL585 G7 6176SE 4P 64GB-R P410i/1GB FBWC 8 SFF 1200W RPS Perf IC Svr 601361-xx1</p> | <p>Processors Cache Memory Memory Network Controller Storage Controller Hard Drives Internal Storage</p> | <p>(4) AMD Opteron™ 6176SE (2.3GHz/12-core/12MB/105W) Processors</p> <p>12MB (1 x 12MB) L3 cache</p> <p>64GB (16x4GB) of PC3-10600 (DDR3-1333) NOTE: 48 DIMM slots.</p> <p>HP NC375i Integrated Quad Port Gigabit Server Adapter</p> <p>Embedded HP Smart Array P410i/1G FBWC Controller</p> <p>None ship standard</p> <p>Up to 8TB of internal storage (SFF SAS)</p> |
|---|---|--|



Pre-configured Models

| | |
|-----------------------|---|
| Optical Drive | None ship standard |
| Power Supply | Four 1200W Power Supplies standard |
| Fans | 4 Hot plug, redundant fans (individually removable) |
| Integrated Lights Out | Integrated Lights-Out 3 (iLO 3) ships standard |
| Insight Control | HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates |
| Form Factor | 4U Rack |
| Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

Base Models

HP ProLiant DL585 G7
6238 2P 32GB-R Hot
Plug SFF 1200W PS
Server
653748-xx1

| | |
|-----------------------|---|
| Processors | (2) AMD Opteron™ 6238 (2.6GHz/12-core/16MB/115W) Processors |
| Cache Memory | 16MB L3 cache |
| Memory | 32GB (4x8GB) of PC3-10600 (DDR3-1333) NOTE: 24 DIMM slots. |
| Network Controller | HP NC375i Integrated Quad Port Gigabit Server Adapter |
| Storage Controller | Embedded HP Smart Array P410i Zero Memory Controller |
| Hard Drives | None ship standard |
| Internal Storage | Up to 8TB of internal storage (SFF SAS) |
| Optical Drive | None ship standard |
| Power Supply | Two 1200W Power Supplies standard |
| Fans | 4 Hot plug, redundant fans (individually removable) |
| Integrated Lights Out | Integrated Lights-Out 3 (iLO 3) ships standard |
| Form Factor | 4U Rack |
| Warranty | Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. |

HP ProLiant DL585 G7
6168 2P 32GB-R
P410i/512 FBWC 8 SFF
1200W RPS Base Server
583105-xx1

| | |
|-----------------------|---|
| Processors | (2) AMD Opteron™ 6168 (1.9GHz/12-core/12MB/80W) Processors |
| Cache Memory | 12MB (1 x 12MB) L3 cache |
| Memory | 32GB (8x4GB) of PC3-10600 (DDR3-1333) NOTE: 24 DIMM slots. |
| Network Controller | HP NC375i Integrated Quad Port Gigabit Server Adapter |
| Storage Controller | Embedded HP Smart Array P410i/512MB FBWC Controller |
| Hard Drives | None ship standard |
| Internal Storage | Up to 8TB of internal storage (SFF SAS) |
| Optical Drive | None ship standard |
| Power Supply | Two 1200W Power Supplies standard |
| Fans | 4 Hot plug, redundant fans (individually removable) |
| Integrated Lights Out | Integrated Lights-Out 3 (iLO 3) ships standard |
| Form Factor | 4U Rack |



Pre-configured Models

Warranty

Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response.

Country Code Key

xx = 00

U.S.

xx = 20

Brazil

xx = 29

Japan

xx = 37

AP

xx = 42

Europe

xx = AA

PRC



Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Configure-to-order (CTO) servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is only available as a factory installable option.

Step 1: Base Configuration

| | | |
|-----------|---|------------|
| HP Models | HP ProLiant DL585 G7 Configure-to-order Server | 590480-B21 |
| | Factory Integrated Models ship with: | |
| | HP NC375i Integrated Quad Port Gigabit Server Adapter | |
| | Five standard PCI-express slots | |
| | HP Smart Array P410i/ Zero Memory Controller | |
| | Four redundant hot-plug fans | |
| | SFF SAS/SATA/SSD drive cage | |
| | HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board | |
| | Rack (4U), 7-inch | |
| | NOTE: Power supplies need to be selected separately from Step 2 below. | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | | |
|---------------|--|------------|
| HP Processors | NOTE: If more than two processors are desired, select xxxxx-L21 and additional processors would be xxxxx-B21. 3P configurations are not supported | |
| | Sixteen-Core Processors | |
| | HP DL585 G7 AMD Opteron™ 6282SE (2.60GHz/16-core/16MB/140W) FIO 2-processor Kit | 653976-L21 |
| | HP DL585 G7 AMD Opteron™ 6276 (2.30GHz/16-core/16MB/115W) FIO 2-processor Kit | 653978-L21 |
| | HP DL585 G7 AMD Opteron™ 6274 (2.20GHz/16-core/16MB/115W) FIO 2-processor Kit | 655514-L21 |
| | HP DL585 G7 AMD Opteron™ 6272 (2.10GHz/16-core/16MB/115W) FIO 2-processor Kit | 653980-L21 |
| | HP DL585 G7 AMD Opteron™ 6262HE (1.60GHz/16-core/16MB/85W) FIO 2-processor Kit | 655522-L21 |
| | Twelve-Core Processors | |
| | HP DL585 G7 AMD Opteron™ 6238 (2.60GHz/12-core/16MB/115W) FIO 2-processor Kit | 653982-L21 |
| | HP DL585 G7 AMD Opteron™ 6234 (2.40GHz/12-core/16MB/115W) FIO 2-processor Kit | 655518-L21 |
| | HP DL585 G7 AMD Opteron™ 6180SE (2.5GHz/12-core/12MB/140W) FIO 2-processor Kit | 633965-L21 |
| | HP DL585 G7 AMD Opteron™ 6176SE (2.3GHz/12-core/12MB/140W) FIO 2-processor Kit | 601351-L21 |
| | HP DL585 G7 AMD Opteron™ 6176 (2.3GHz/12-core/12MB/115W) FIO 2-processor Kit | 633967-L21 |



Configuration Information - Factory Integrated Models

| | |
|---|------------|
| HP DL585 G7 AMD Opteron™ 6174 (2.2GHz/12-core/12MB/115W) FIO 2-processor Kit | 601353-L21 |
| HP DL585 G7 AMD Opteron™ 6172 (2.1GHz/12-core/12MB/115W) FIO 2-processor Kit | 583109-L21 |
| HP DL585 G7 AMD Opteron™ 6168 (1.9GHz/12-core/12MB/115W) FIO 2-processor Kit | 583106-L21 |
| HP DL585 G7 AMD Opteron™ 6164HE (1.7GHz/12-core/12MB/85W) FIO 2-processor Kit | 601357-L21 |
| HP DL585 G7 AMD Opteron™ 6166HE (1.8GHz/12-core/12MB/85W) FIO 2-processor Kit | 633971-L21 |

Eight-Core processors

| | |
|--|------------|
| HP DL585 G7 AMD Opteron™ 6220 (3.0GHz/8-core/16MB/115W) FIO 2-processor Kit | 655520-L21 |
| HP DL585 G7 AMD Opteron™ 6212 (2.60GHz/8-core/16MB/115W) FIO 2-processor Kit | 655516-L21 |
| HP DL585 G7 AMD Opteron™ 6140 (2.6GHz/8-core/12MB/115W) FIO 2-processor Kit | 633969-L21 |
| HP DL585 G7 AMD Opteron™ 6136 (2.4GHz/8-core/12MB/115W) FIO 2-processor Kit | 601355-L21 |
| HP DL585 G7 AMD Opteron™ 6128 (2.0GHz/8-core/12MB/115W) FIO 2-processor Kit | 583103-L21 |
| HP DL585 G7 AMD Opteron™ 6132HE (2.2GHz/8-core/12MB/85W) FIO 2-processor Kit | 633973-L21 |

HP Memory

NOTE: HP Memory selection requires a minimum quantity 2.

| | |
|--|------------|
| HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593907-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593911-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604500-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593913-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604502-B21 |
| HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 593915-B21 |
| HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit | 627808-B21 |
| HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit | 627810-B21 |

HP Power Supplies

| | |
|---|------------|
| HP 1200W Common Slot Silver Hot Plug Power Supply Kit | 500172-B21 |
| HP 1200W Common Slot Platinum Hot Plug Power Supply Kit | 578322-B21 |

NOTE: Option Kit contains optional power supply, an IEC power cable and PDU IEC cables.



Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

| | | |
|------------------------|--|------------|
| HP Storage Controllers | HP Smart Array P212/256 BBWC 1-ports Int/1-ports Ext PCIe x8 FIO SAS Controller | 491191-B21 |
| | HP Smart Array P411/256 BBWC 2-ports Ext PCIe x8 FIO SAS Controller | 491193-B21 |
| HP Insight Software | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License | 582765-B21 |
| | HP Insight Control for Linux including 1yr 24x7 Support ML/DL Bundle 1 Server FIO License | TC203A |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.



Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | | |
|--------------------------|--|------------|
| HP Unique Options | HP DL585 G7 PCI-E Riser Card NOTE: Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8 | 590485-B21 |
| | HP DL585 G7 PCI-E/X Riser Card NOTE: Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X | 590487-B21 |
| | HP DL585 G7 CPU Memory Secondary Upgrade Option NOTE: Adds processor sockets 3 and 4. | 590489-B21 |
| | HP DL585 G7 PCI-E Riser v2 Option Kit NOTE: Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8. NOTE: v2 recommended for AMD Opteron 6200 processor configurations. | 659805-B21 |
| | HP DL585 G7 PCI-E/X Riser v2 Option Kit NOTE: Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X. NOTE: v2 recommended for AMD Opteron 6200 processor configurations. | 659807-B21 |

HP Processors

NOTE: Processor kits contain two processors each.

Sixteen Core Processors

| | |
|---|------------|
| HP DL585 G7 AMD Opteron™ 6282SE (2.60GHz/16-core/16MB/140W) 2-processor Kit | 653976-B21 |
| HP DL585 G7 AMD Opteron™ 6276 (2.30GHz/16-core/16MB/115W) 2-processor Kit | 653978-B21 |
| HP DL585 G7 AMD Opteron™ 6274 (2.20GHz/16-core/16MB/115W) 2-processor Kit | 655514-B21 |
| HP DL585 G7 AMD Opteron™ 6272 (2.10GHz/16-core/16MB/115W) 2-processor Kit | 653980-B21 |
| HP DL585 G7 AMD Opteron™ 6262HE (1.60GHz/16-core/16MB/85W) 2-processor Kit | 655522-B21 |

Twelve-Core Processors

| | |
|--|------------|
| HP DL585 G7 AMD Opteron™ 6238 (2.60GHz/12-core/16MB/115W) 2-processor Kit | 653982-B21 |
| HP DL585 G7 AMD Opteron™ 6234 (2.40GHz/12-core/16MB/115W) 2-processor Kit | 655518-B21 |
| HP DL585 G7 AMD Opteron™ 6180SE (2.5GHz/12-core/12MB/140W) 2-processor Kit | 633965-B21 |
| HP DL585 G7 AMD Opteron™ 6176SE (2.3GHz/12-core/12MB/140W) 2-processor Kit | 601351-B21 |
| HP DL585 G7 AMD Opteron™ 6176 (2.3GHz/12-core/12MB/115W) 2-processor Kit | 633967-B21 |
| HP DL585 G7 AMD Opteron™ 6174 (2.2GHz/12-core/12MB/115W) 2-processor Kit | 601353-B21 |
| HP DL585 G7 AMD Opteron™ 6172 (2.1GHz/12-core/12MB/115W) 2-processor Kit | 583109-B21 |
| HP DL585 G7 AMD Opteron™ 6168 (1.9GHz/12-core/12MB/115W) 2-processor Kit | 583106-B21 |



Core Options

| | |
|---|------------|
| HP DL585 G7 AMD Opteron™ 6166HE (1.8GHz/12-core/12MB/85W) 2-processor Kit | 633971-B21 |
| HP DL585 G7 AMD Opteron™ 6164HE (1.7GHz/12-core/12MB/85W) 2-processor Kit | 601357-B21 |
| Eight-Core Processors | |
| HP DL585 G7 AMD Opteron™ 6220 (3.0GHz/8-core/16MB/115W) 2-processor Kit | 655520-B21 |
| HP DL585 G7 AMD Opteron™ 6212 (2.60GHz/8-core/16MB/115W) 2-processor Kit | 655516-B21 |
| HP DL585 G7 AMD Opteron™ 6140 (2.6GHz/8-core/12MB/115W) 2-processor Kit | 633969-B21 |
| HP DL585 G7 AMD Opteron™ 6136 (2.4GHz/8-core/12MB/115W) 2-processor Kit | 601355-B21 |
| HP DL585 G7 AMD Opteron™ 6128 (2.0GHz/8-core/12MB/115W) 2-processor Kit | 583103-B21 |
| HP DL585 G7 AMD Opteron™ 6132HE (2.2GHz/8-core/12MB/85W) 2-processor Kit | 633973-B21 |

HP Memory

NOTE: DIMM banks are active only when the corresponding processor socket is populated.

NOTE: Memory must be installed in like-pairs, i.e. two of the same size.

Registered DIMMs (RDIMMs)

| | |
|--|------------|
| HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593907-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593911-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604500-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593913-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604502-B21 |
| HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 593915-B21 |
| HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit | 627808-B21 |
| HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit | 627810-B21 |

Upgrade Options

| | |
|---|------------|
| HP DL585 G7 CPU Memory Secondary Upgrade Option | 590489-B21 |
|---|------------|

NOTE: Adds processor sockets 3 and 4.

HP Optical Drives

NOTE: Optical drives are ejectable.

| | |
|---|------------|
| HP Slim 12.7mm SATA DVD-ROM Optical Drive | 481041-B21 |
| HP Slim 12.7mm SATA DVD-RW Optical Drive | 481043-B21 |

HP Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller,



Core Options

firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

| | |
|---|------------|
| HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 619291-B21 |
| HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 581286-B21 |
| HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 581284-B21 |
| HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3 yr Warranty Hard Drive | 627117-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 507127-B21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 512547-B21 |
| HP 72GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 512545-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html
(Worldwide)

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | |
|---|------------|
| HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive | 605835-B21 |
| HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive | 507610-B21 |

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | |
|---|------------|
| HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive | 625609-B21 |
| HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive | 507750-B21 |

NOTE: SATA drives have a 1 year warranty. Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html
(Worldwide)

SATA Hot Plug 2.5" Enterprise Mainstream Solid State Drives

| | |
|--|------------|
| HP 400GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive | 636597-B21 |
| HP 200GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive | 636595-B21 |
| HP 100GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive | 636593-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html
(Worldwide)



Core Options

6G SAS Hot Plug Enterprise Performance Solid State Drives

HP 400GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632494-B21

HP 200GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632492-B21

6G SAS Hot Plug Enterprise Mainstream Solid State Drives

HP 800GB 6G SAS MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 632506-B21

HP 400GB 6G SAS MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 632504-B21

HP 200GB 6G SAS MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 632502-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14038_div/14038_div.html (Worldwide)

HP Networking

Gigabit Ethernet adapters

HP NC112T PCI Express Gigabit Server Adapter 503746-B21

HP NC360T PCI-E Dual Port Gigabit Server Adapter 412648-B21

HP NC365T 4-port Ethernet Server Adapter 593722-B21

HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter 394793-B21

HP NC373T PCI-E Multifunction Gigabit Server Adapter 394791-B21

HP NC375T PCI Express Quad Port Gigabit Server Adapter 538696-B21

HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter 458492-B21

10 Gigabit Ethernet adapters

NOTE: No more than two 10GbE I/O devices are supported in a single ProLiant server.

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

HP NC522SFP Dual Port 10GbE Gigabit Server Adapter 468332-B21

HP NC523SFP 10Gb 2-port Server Adapter 593717-B21

HP NC524SFP Dual Port 10GbE Module 489892-B21

HP NC550SFP Dual Port 10GbE Server Adapter 581201-B21

HP NC552SFP 10Gb 2-port Ethernet Server Adapter 614203-B21

HP 10 GbE PCI-e G2 Dual Port Network Interface Card 516937-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs.



Core Options

| | | |
|--------------------------|--|------------|
| HP InfiniBand | HP InfiniBand 4X DDR PCI-E 0 Memory Dual Port HCA | 483513-B21 |
| | QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA | 583211-B21 |
| | HP InfiniBand 4X QDR ConnectX-2 PCIe G2 Dual Port HCA | 592520-B21 |
| | HP InfiniBand 4X DDR ConnectX-2 PCIe G2 Dual Port HCA | 592521-B21 |
| HP I/O Expansion Options | HP DL585 G7 PCI-E Riser v2 Option Kit | 659805-B21 |
| | NOTE: Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8. | |
| | NOTE: v2 recommended for AMD Opteron 6200 processor configurations. | |
| | HP DL585 G7 PCI-E/X Riser v2 Option Kit | 659807-B21 |
| | NOTE: Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X. | |
| | NOTE: v2 recommended for AMD Opteron 6200 processor configurations. | |
| HP Power Supplies | NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor . | |
| | HP 1200W Common Slot Silver Hot Plug Power Supply Kit | 500172-B21 |
| | HP 1200W Common Slot Platinum Hot Plug Power Supply Kit | 578322-B21 |
| | NOTE: Option Kits contains optional power supply, an IEC power cable and PDU IEC cables. | |



Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | | |
|----------------------------|---|------------|
| HP Insight Software | HP Insight Control | |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License | 452148-B22 |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License | T9074BAE |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License | TC278AAE |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Tracking License | TC275A |

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the Insight Control QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html

HP Insight Control for Linux

| | |
|---|----------|
| HP Insight Control for Linux including 1yr 24x7 Support Electronic License | TC213AAE |
| HP Insight Control for Linux including 1yr 24x7 Support Single Server License | TC209A |
| HP Insight Control for Linux Media Kit | TC208A |

NOTE: Media pack DVD contains the ISO image for HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Servers must be acquired separately.

NOTE: Licenses ship without media. The Media Kit for Insight Control for Linux can be ordered separately, or can be downloaded at: <http://www.hp.com/go/ic-linux> (click on Download button).

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single set of activation keys.

NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html

HP Integrated Lights-Out (iLO) Advanced

| | |
|--|------------|
| HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License | 512485-B21 |
| HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License | TA850AAE |
| HP Insight Software Media Kit | 436222-B21 |

NOTE: Insight Software DVD media without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Insight Dynamics, HP Insight Control for Microsoft System Center, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.



Additional Options

NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html

HP Insight Control server deployment

HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License T9082AAE

HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License 452151-B21

NOTE: Licenses ship without media. The Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key, and is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional license kits please see the Insight Control QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/12631_div/12631_div.html

High Performance Clusters

HP Cluster Management Utility

HP Cluster Management Utility Compute Node Flexible License QL803A

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

HP Cluster Management Utility License and Media 433257-B21

NOTE: Order a minimum of one license per cluster to purchase media including software and documentation, which will be delivered to the customer, and also licenses CMU management. No license key is delivered or required.

NOTE: For additional license kits please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/12612_div/12612_div.html

HP HPC Linux Value Pack

HP High Performance Computing Linux Value Pack 1 Processor Flexible License TC293B

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one socket (a.k.a. processor). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

HP High Performance Computing Linux Value Pack Media Kit TC294A

NOTE: This part number can be used to purchase media including software and documentation, which will be delivered to the customer.



Additional Options

NOTE: For additional license kits please see the QuickSpecs at:
http://h18004.www1.hp.com/products/quickspecs/13485_div/13485_div.html

| | | |
|--|---|------------|
| HP Graphics Options | HP DL580/DL585/DL980 G7 Power Cable Kit | 631660-B21 |
| | NOTE: The HP ProLiant DL585 G7 can support up to 4 (225W) or 3 (300W) Graphic Cards and/or GPGPU Accelerator Options. | |
| | NOTE: An option kit will be required per Graphic Card and/or GPGPU Accelerator Options. | |
| | NOTE: Depending on the number of GPGPUs required, customers will need to purchase one of the following I/O expansion boards: HP DL585G7 PCI-E Option Kit PN: 590485-B21 (Adds 2 PCI-E 2.0 x16, 4 PCI-E 2.0 x8. OR the HP DL585G7 PCI-E/X Option Kit: PN: 590487-B21 (Adds 1 PCI-E 2.0 x16, 2 PCI-E 2.0 x8, 1 PCI-E 2.0 x4, 2 PCI-X). | |
| HP I/O Accelerator Options | HP 160GB Single Level Cell PCIe ioDrive for ProLiant Servers | 600278-B21 |
| | NOTE: A low-profile PCI bracket is included for use in low-profile slots. | |
| | HP 320GB Multi Level Cell PCIe ioDrive for ProLiant Servers | 600279-B21 |
| | NOTE: A low-profile PCI bracket is included for use in low-profile slots. | |
| | HP 320GB Single Level Cell PCIe ioDrive Duo for ProLiant Servers | 600281-B21 |
| | HP 640GB Multi Level Cell PCIe ioDrive Duo for ProLiant Servers | 600282-B21 |
| HP Security - TPM | HP 1.28TB Multi Level Cell PCIe IO Accelerator | 641027-B21 |
| | NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13587_div/13587_div.html (Worldwide) | |
| | HP Trusted Platform Module Option | 488069-B21 |
| NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM . | | |
| NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment. | | |
| NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss. | | |
| HP Storage Controllers | SAS Controllers | |
| | Smart Array P212 Controller | |
| | HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller | 462828-B21 |
| | HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller | 462834-B21 |



Additional Options

Smart Array P410 Controller

| | |
|---|------------|
| HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller | 462862-B21 |
| HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller | 462864-B21 |
| HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller | 578230-B21 |
| HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller | 572532-B21 |

Smart Array P411 Controller

| | |
|---|------------|
| HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller | 462830-B21 |
| HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller | 462832-B21 |
| HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller | 578229-B21 |
| HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller | 572531-B21 |

Smart Array P812 Controller

| | |
|--|------------|
| HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller | 487204-B21 |
|--|------------|

Optional Upgrades

| | |
|---|------------|
| HP 512MB P-Series Battery Backed Write Cache Upgrade | 462967-B21 |
| NOTE: Supported on HP Smart Array P411 Controller only. | |
| HP 512MB Flash Backed Write Cache | 534916-B21 |
| HP 256MB P-series Cache Upgrade | 462968-B21 |
| HP 1GB Flash Backed Cache | 534562-B21 |
| HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License | 516471-B21 |

NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html
(Smart Array P212 Controller)

http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html
(Smart Array P410 Controller)

http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html
(Smart Array P411 Controller)

http://h18000.www1.hp.com/products/quickspecs/13558_div/13558_div.html
(Smart Array P812 Controller)

http://h18000.www1.hp.com/products/quickspecs/13200_div/13200_div.html
(Smart Array Advanced Pack)

SAS HBA

| | |
|---|------------|
| HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter | 614988-B21 |
|---|------------|

NOTE: This is a 2 x4 External Port HBA

NOTE: This is only approved for the HP P2000 G3 SAS Modular Smart Array.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18004.www1.hp.com/products/quickspecs/13651_div/13651_div.html
(SC08e 6Gb HBA)

SCSI HBA



Additional Options

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter 412911-B21
NOTE: Recommended HBA for SCSI tape drive connect.

NOTE: Please see the following QuickSpecs for additional information:
http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html
(SC11Xe HBA)

NOTE: Please refer to the HBA QuickSpecs for additional information at:
<http://www.hp.com/products/hba>.

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see:
<http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/go/connect>.
NOTE: Connection using HP Smart Array P212/Zero Memory Controller (PN 462828-B21) recommended.

HP DAT 320 USB in 1U Rack-mount Kit AP835B

HP 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader AK377A
NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation.

HP LTO-5 Ultrium 3280 SAS Internal Tape Drive EH899A
NOTE: For installation into 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server.

HP 1/8 G2 LTO-5 Ultrium 3000 SAS Tape Autoloader BL536A
NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation.

HP MSL2024 1 LTO-4 Ultrium 1760 SAS Tape Library AK378A

HP MSL2024 1 LTO-5 Ultrium 3000 SAS Tape Library BL537A

HP MSL4048 2 LTO-4 Ultrium 1760 SAS Tape Library AK380A

HP MSL4048 2 LTO-5 Ultrium 3000 SAS Tape Library BL538A

HP MSL8096 2 LTO-4 Ultrium 1760 SAS Tape Library AK382A

HP MSL8096 2 LTO-5 Ultrium 3000 SAS Tape Library BL539A

HP Disk Backup

NOTE: For the complete range of D2D Backup Systems see:
<http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see:
<http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk backup products see: <http://www.hp.com/go/connect>.

HP D2D Backup Systems with Backup Data Deduplication

HP D2D2504i Backup System EJ002B

NOTE: 3.0TB of useable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP StorageWorks D2D4009i Backup System EH939A

NOTE: 7.5TB of useable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP D2D4112 Backup System EH993B

NOTE: 9.0TB (expandable to 18.0TB) of useable network disk backup capacity. Fibre Channel SAN connected appliance. Direct server attach is not supported, requires connection via SAN fabric.



Additional Options

HP RDX Removable Disk Backup Systems USB

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server.

HP StorageWorks RDX500 Internal Removable Disk Backup System AJ934A

NOTE: 500GB of disk capacity per data cartridge.

HP StorageWorks RDX1000 Internal Removable Disk Backup System BV847A

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 1 TB of disk capacity per data cartridge.

HP Storage Options

Storage Fibre Channel HBA

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP 41B PCIe 4Gb Fibre Channel Single Port Host Bus Adapter AP767A

HP 42B PCIe 4Gb Fibre Channel Dual Port Host Bus Adapter AP768A

HP 82B PCIe 8Gb Fibre Channel Dual Port Host Bus Adapter AP770A

HP 81B PCIe 8Gb Fibre Channel Single Port Host Bus Adapter AP769A

Emulex Fibre Channel HBAs

HP 81E 8Gb Single Port PCI-e Fibre Channel Host Bus Adapter AJ762A

HP 82E 8Gb Dual Port PCI-e Fibre Channel Host Bus Adapter AJ763A

HP FC2142SR 4Gb PCIe Host Bus Adapter A8002A

HP FC2242SR 4Gb PCIe DC Host Bus Adapter A8003A

QLogic Fibre Channel HBAs

HP 81Q PCI-e Fibre Channel Host Bus Adapter AK344A

HP 82Q 8Gb Dual Port PCI-e Fibre Channel Host Bus Adapter AJ764A

HP FC1142SR 4Gb PCIe Host Bus Adapter AE311A

HP FC1242SR 4Gb PCIe DC Host Bus Adapter AE312A

Storage SCSI HBA

HP U320e SCSI Dual Channel Host Bus Adapter AH627A

NOTE: Recommended HBA for MSL SCSI Tape Library connect.

Converged Network Adapter

HP CN1100E Dual Port Converged Network Adapter BK835A

HP CN1000E Dual Port Converged Network Adapter AW520A



Additional Options

| | | |
|--------------------------------|---|------------|
| HP Disk Storage Systems | MSA SAN Storage Arrays | |
| | HP MSA70 Array | 418800-B21 |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html | |
| | Disk Enclosures | |
| | HP D2600 Disk Enclosure | AJ940A |
| | HP D2700 Disk Enclosure | AJ941A |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html (Worldwide) | |

| | | |
|---|--|--------|
| HP Uninterruptible Power Systems | HP Rack-mountable UPS | |
| | HP R1500 G3 Uninterruptible Power Supply (UPS) | |
| | HP R1.5kVA G3 1U NA Uninterruptible Power System | AF469A |
| | HP R1.5kVA G3 1U JP/TW Uninterruptible Power System | AF470A |
| | HP R1.5kVA G3 1U INTL Uninterruptible Power System | AF471A |
| | NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14059_div/14059_div.html (Worldwide) | |
| | HP R/T3000 G2 Uninterruptible Power System (UPS) | |
| | HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System | AF466A |
| | HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System | AF467A |
| | HP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible Power System | AF468A |
| | NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14058_div/14058_div.html (Worldwide) | |
| | HP Rack-Mountable R5500 UPS | |
| | HP R5500 6000VA INTL 3U Rackmount Uninterruptible Power System | AF416A |
| | HP R5500 5000kVA NA/JP 3U Rackmount Uninterruptible Power System | AF426A |
| | NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/11871_div/11871_div.html (Worldwide) | |
| | R5000 Uninterruptible Power System (UPS) | |
| | HP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power System | AF461A |
| | HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System | AF460A |
| | NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14109_div/14109_div.html (Worldwide) | |
| | R7000 Uninterruptible Power System (UPS) | |
| | HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System | AF462A |
| | HP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power System | AF463A |



Additional Options

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14110_div/14110_div.html
(Worldwide)

NOTE: For additional information on HP Uninterruptible Power Systems please go to:

www.hp.com/servers/rackups.

NOTE: For additional information on sizing your server, please reference:

<http://www.upssizer.com>.

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link.

That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.

HP Power Distribution Units

HP Monitored Power Distribution Unit: Half Rack Version

HP 4.9kVA 24A Single Input Single Phase NA/JP Monitored Power Distribution Unit AF914A

HP 7.3kVA 32A Single Input Single Phase INTL Monitored Power Distribution Unit AF915A

HP Monitored Power Distribution Unit: Full Rack Version

HP 8.6kVA 24A Single Input Three Phase NA/JP Monitored Power Distribution Unit AF504A

HP 8.3kVA 40A Single Input Single Phase NA/JP Monitored Power Distribution Unit AF506A

HP 11kVA 16A Single Input Three Phase INTL Monitored Power Distribution Unit AF508A

HP 7.3kVA 32A Single Input Single Phase INTL Monitored Power Distribution Unit AF510A

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12118_div/12118_div.html
(Worldwide)

Modular Power Distribution Units 1U/0U (Up to 32 outlets)

NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).

HP 4.9kVA 24A High Voltage NA/JP Modular Power Distribution Unit 252663-D72

HP 8.3kVA 40A High Voltage NA/JP Modular Power Distribution Unit 252663-D73

HP 7.3kVA 32A High Voltage INTL Modular Power Distribution Unit 252663-B31

HP 3.6kVA 16A High Voltage INTL Modular Power Distribution Unit 252663-B24

NOTE: This PDU has a detachable input power cord and allows for adaptability to country specific power requirements.

NOTE: Please see the following QuickSpecs for additional options including shorter jumper cables and country specific power cords:

http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.html
(Worldwide)

NOTE: For additional information on HP Power Distribution Units including accessories please go to: www.hp.com/go/pdu.

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link.

That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.



Additional Options

| HP Intelligent Power Distribution Units (iPDU) | iPDU Core Units | |
|--|---|--------|
| | HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF520A |
| | HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF521A |
| | HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF522A |
| | HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit | AF533A |
| | HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF523A |
| | HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit | AF525A |
| | HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF526A |
| | HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF527A |
| | HP 11.4kVA 16A 415V Three Phase L22-20 NA/JP Core Intelligent Power Distribution Unit | AF900A |
| | HP 17.3kVA 24A 415V Three Phase L22-30 NA/JP Core Intelligent Power Distribution Unit | AF902A |
| | HP 17.3kVA 24A 415V Three Phase IEC309 NA/JP Core Intelligent Power Distribution Unit | AF901A |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:
http://h18000.www1.hp.com/products/quickspecs/13650_div/13650_div.html
(Worldwide)

| HP Rack Series | HP Rack 10000 G2 Series (Carbon/Graphite Metallic) | |
|----------------|--|--------|
| | HP 10642 G2 Pallet Universal Rack | AF001A |
| | HP 10642 G2 Shock Universal Rack | AF002A |
| | HP 10642 G2 1200mm deep Shock Rack | AF092A |
| | HP 10647 G2 1200mm deep Shock Rack | AF094A |

NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.

NOTE: Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:
http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

NOTE: The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment: Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation). Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without



Additional Options

blanking panels results in improper cooling that can lead to thermal damage.

NOTE: Quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000, 9000, 10000 G2 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.

| HP Intelligent Power Distribution Units (iPDU) | iPDU Core Units | |
|--|--|--------|
| | HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF520A |
| | HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF521A |
| | HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF522A |
| | HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit | AF533A |
| | HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF523A |
| | HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit | AF525A |
| | HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF526A |
| | HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF527A |
| | HP 11.4kVA 16A 415V Three Phase L22-20 NA Core Intelligent Power Distribution Unit | AF900A |
| | HP 17.3kVA 24A 415V Three Phase L22-30 NA Core Intelligent Power Distribution Unit | AF902A |
| | HP 17.3kVA 24A 415V Three Phase IEC309 NA Core Intelligent Power Distribution Unit | AF901A |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13650_div/13650_div.html
(Worldwide)

| HP Rack Options | Keyboards and Monitors | |
|-----------------|--|--------|
| | HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor | AZ870A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard UK Monitor | AZ871A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard DE Monitor | AZ872A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard FR Monitor | AZ873A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard IT Monitor | AZ874A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard ES Monitor | AZ875A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard DK Monitor | AZ876A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard NO Monitor | AZ877A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard SE/FI Monitor | AZ878A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard CH Monitor | AZ879A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard PT Monitor | AZ880A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard BE Monitor | AZ881A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard JP Monitor | AZ882A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard RU Monitor | AZ883A |
| | HP TFT7600 G2 KVM Console Rackmount Keyboard Intl Monitor | AZ884A |



Additional Options

| | |
|---|--------|
| HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor | AZ885A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13731_div/13731_div.html (Worldwide) | |
| HP TFT7600 Rackmount Keyboard 17in US Monitor | AG052A |
| HP TFT7600 Rackmount Keyboard 17in UK Monitor | AG053A |
| HP TFT7600 Rackmount Keyboard 17in DE Monitor | AG054A |
| HP TFT7600 Rackmount Keyboard 17in ES Monitor | AG057A |
| HP TFT7600 Rackmount Keyboard 17in CH Monitor | AG061A |
| HP TFT7600 Rackmount Keyboard 17in BE Monitor | AG063A |
| HP TFT7600 Rackmount Keyboard 17in JP Monitor | AG064A |
| HP TFT7600 Rackmount Keyboard 17in RU Monitor | AG065A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12417_div/12417_div.html (Worldwide) | |
| HP 1U US Rackmount Keyboard with USB | AG072A |
| HP 1U UK Rackmount Keyboard with USB | AG073A |
| HP 1U DE Rackmount Keyboard with USB | AG074A |
| HP 1U FR Rackmount Keyboard with USB | AG075A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12465_div/12465_div.html (Worldwide) | |
| HP Server Console Switches | |
| HP Server Console 0x2x8 Port Analog Switch | AF616A |
| HP Server Console 0x2x16 Port Analog Switch | AF617A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/11834_div/11834_div.html (Worldwide) | |
| HP Server Console Switch G2 with Virtual Media & CAC | |
| HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software | AF618A |
| HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software | AF619A |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13475_div/13475_div.html (Worldwide) | |
| HP IP Console Switch G2 with Virtual Media & CAC | |
| HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software | AF620A |
| HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software | AF621A |
| HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software | AF622A |



Additional Options

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:
http://h18000.www1.hp.com/products/quickspecs/13474_div/13474_div.html
(Worldwide)

| | | |
|-----------------------|---|------------|
| HP USB and SD Options | HP USB 2-Button Optical Scroll Mouse | DC172B |
| | HP USB 04 Standard Keyboard | DT528A#ABA |
| | HP 4GB Secure Digital High Capacity Flash Media Kit | 580387-B21 |
| | NOTE: Blank SD media device is supported for use with VMware and Citrix. SD media must be installed in the internal slot of the ProLiant server. Learn more at: http://www.hp.com/go/proliantvirtualization . | |
| | HP 2GB USB Flash Media Drive Key Kit | 608447-B21 |
| | NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software like SmartStart. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions. | |

| | | |
|--|--|--------|
| HP Care Pack Services | Hardware Services On-site Service | |
| | HP 3 year 4 hour 13x5 ProLiant DL58x Hardware Support | U4607E |
| | HP 3 year 4 hour 24x7 ProLiant D58x Hardware Support | U4608E |
| | 6-Hour Call to Repair, On-site Service 7-Day x 24-Hour Coverage, 3 Years (U.S. Part Number) | |
| | HP 3 year 6 hour 24x7 Call to Repair ProLiant DL58x Hardware Support | U4609E |
| | Installation & Start-up Services | |
| | HP Install ProLiant DL58x Service | U4617E |
| | HP Startup ProLiant DL58x Service | U4618E |
| | HP Installation and Startup for Insight Control Server Deployment - previously Rapid Deployment Pack | U5683E |
| | Support Plus | |
| | HP 3 year Support Plus Microsoft ProLiant DL58x Service | U4619E |
| | Support Plus 24 | |
| | HP 3 year Support Plus 24 Microsoft ProLiant DL58x Service | U4620E |
| HP 3 year Support Plus 24 SuSE ProLiant DL58x Service | U6316E | |
| NOTE: For more information, customer/resellers can contact: http://www.hp.com/services/carepack | | |



Memory

NOTE: Standard memory configurations listed do not apply to "Factory Integrated Models."

HP ProLiant DL585 G7 Models Memory Configurations

- This server supports DDR3 2GB, 4GB, 8GB, 16GB and 32GB memory modules across 48 memory sockets.
- For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:
www.hp.com/go/ddr3memory-configurator

Advanced ECC memory

- Advanced ECC memory is the memory protection mode for this server. In Advanced ECC, the server does not fail because of correctable memory errors. The server provides notification if the level of correctable errors exceeds a pre-defined threshold rate.
- Advanced ECC provides additional protection over standard ECC because it is possible to correct certain memory errors that would otherwise be uncorrectable and result in a server failure.
- Whereas standard ECC can correct single-bit memory errors, Advanced ECC can correct single-bit memory errors and multi-bit memory errors if all failed bits are on the same DRAM device on the memory module.

Online Spare memory

- Online Spare memory mode is a higher level of memory protection that complements Standard Memory mode with Advanced ECC. With Online Spare mode, a DIMM with a rank of memory at least as large as the other ranks in the system, or memory board, is designated as the Online Spare rank.² If one of the other DIMMs exceeds a threshold rate of correctable memory errors, the affected rank of memory within that DIMM is taken offline and the data is copied to the Online Spare rank. This capability maintains server availability and memory reliability without service intervention or server interruption. The DIMM that exceeded the error threshold can be replaced at the customer's convenience during a scheduled shutdown. Online Spare reduces the chance of an uncorrectable error bringing down the system; however, it does not fully protect the system against uncorrectable memory errors.
- Online Spare mode is beneficial to businesses with sites that do not have IT staff available to service a failure, do not always have replacement memory readily available, or cannot bring down the server until a scheduled shutdown. The cost of implementation for Online Spare over Advanced ECC is the hardware cost of the extra DIMMs for the spare memory bank.
- The user configures the system for Online Spare mode through the RBSU3. Online Spare configuration requirements vary for each server series, but it does not require operating system support or special software beyond the System BIOS. However, if messaging and logging are desired at the console along with messages in HP Systems Insight Manager, an operating system must be used that has system management and agent support for Advanced Memory Protection.

Population order

- The two tables below represent the memory module population order for one processor. The population order for the other processors is identical. SR denotes Single Rank, DR denotes Dual Rank, and QR denotes Quad Rank.
- All memory modules must follow the population order shown in these two tables for all the processors with the following exception:
- QR memory modules must be installed only in memory sockets 2, 5, 8, and 11, while following the population order for those memory sockets.



Memory

| | | | | | | |
|--------------------------------|-------|----------|-------|-------|----------|-------|
| Processor memory socket | 1 | 2 | 3 | 4 | 5 | 6 |
| Rank support per memory socket | SR/DR | SR/DR/QR | SR/DR | SR/DR | SR/DR/QR | SR/DR |
| Population order | A | I | E | C | K | G |
| Processor memory channel | A | A | A | B | B | B |
| Processor memory socket | 7 | 8 | 9 | 10 | 11 | 12 |
| Rank support per memory socket | SR/DR | SR/DR/QR | SR/DR | SR/DR | SR/DR/QR | SR/DR |
| Population order | B | J | F | D | L | H |
| Processor memory channel | C | C | C | D | D | D |

Population rules

- When installing memory modules, observe the following population rules:
- Use only HP memory modules listed in this document.
- Advanced ECC is not available if x4 and x8 memory modules are mixed in channels (A and B), (C and D), or both, but standard ECC is still available. Advanced ECC is available if x4 and x8 memory modules are mixed in memory channels (A and C), (B and D), or both.

While adhering to the memory population rules ("Population rules" - see above), performance can be improved by following the guidelines below:

- Memory modules may be installed one at a time per processor, but installing two at a time per processor provides for additional performance, installing four at a time per processor provides for better performance, and installing equal amounts of memory for all processors provides for best performance.
- Install all memory modules of the same speed on the same processor for best performance.
- Install all memory modules of the same voltage on the same processor for best power.

Advanced Memory Protection (AMP) mode Online Spare Memory has further requirements beyond these listed above. Please refer to the user guide for additional memory configuration requirements

Memory bus speed

Depending on the quantity and native speed of memory modules installed, memory bus speeds can be 1333 MHz, 1066 MHz, 800 MHz, or 667 MHz. Memory bus speeds can be different for each processor.

To determine memory bus speeds, do the following:

Within RBSU, select the Power Management Options menu > Advanced Power Management Options menu > Maximum Memory Bus Frequency menu.



Memory

| Memory modules per channel | QR | SR or DR | Memory module native speed | Memory bus speed (standard-voltage memory module) | Memory bus speed (low-voltage memory module) |
|----------------------------|----|----------|--|---|--|
| 1 | | 1 | SR 1333 MHz DR 1333 MHz DR 1066 MHz | 1333 MHz ¹ | 1066 MHz ¹ |
| 1 | 1 | | QR 1066 MHz | 1066 MHz ¹ | 1066 MHz ¹ |
| 2 | | 2 | SR 1333 MHz DR 1333 MHz DR 1066 MHz | 1333 MHz ^{1,2} | 1066 MHz ^{1,2} |
| 2 | 1 | 1 | SR 1333 MHz DR 1333 MHz DR 1066 MHz QR 1066 MHz | 800 MHz | 800 MHz |
| 3 | | 3 SR | SR 1333 MHz | 1066 MHz | 1066 MHz |
| 3 | | 3 DR | DR 1333 MHz DR 1066 MHz | 1066 MHz | 800 MHz |
| 3 | | 3 mixed | SR 1333 MHz DR 1333 MHz DR 1066 MHz | 1066 MHz | 800 MHz |
| 3 | 1 | 2 | SR 1333 MHz DR 1333 MHz DR 1066 MHz QR 1066 MHz | 800 MHz | 667 MHz |

¹Max. Actual result of lowest DIMM speed

²When 1333MHz selected in BIOS "memory speed with 2DPC" entry

Select one of the following menu options:

- Auto (default) - The memory bus speed is set to what is shown in the following table. If the native speed of the installed memory module is slower than the memory bus speed, the memory bus speed is set to the memory module native speed
- 800 MHz-The memory bus speed is set to 800 MHz regardless of the quantity of memory modules installed, unless the table above reflects a slower memory bus speed.

NOTE: There may be more than one memory bus speed menu option.

NOTE: LVDIMM support is dependent on the ROM version



Memory

Memory Installation Example

These memory installation example shows the memory sockets associated with the first processor only. This can be applied toward the memory sockets associated with the other processor also.

4 RDIMMs per processor

- Standard memory: 4x4GB RDIMMs (16GB per processor)
- Optional memory: Adding 8x8GB RDIMMs to standard memory (80GB per processor)
- Maximum memory: Replacing standard memory with 4x16GB QR RDIMMs and 8x8GB DR RDIMMs (maximum of 128GB per processor)

| Processor memory socket | 1 | 2 | 3 | 4 | 5 | 6 |
|-------------------------|------|------|------|------|------|------|
| Standard Memory | 4GB | | | 4GB | | |
| Optional Memory | 4GB | 8GB | 8GB | 4GB | 8GB | 8GB |
| Maximum Memory | 16GB | 32GB | 16GB | 16GB | 32GB | 16GB |

| Processor memory socket | 7 | 8 | 9 | 10 | 11 | 12 |
|-------------------------|------|------|------|------|------|------|
| Standard Memory | 4GB | | | 4GB | | |
| Optional Memory | 4GB | 8GB | 8GB | 4GB | 8GB | 8GB |
| Maximum Memory | 16GB | 32GB | 16GB | 16GB | 32GB | 16GB |

NOTE: 1TB capacity is achieved by loading 1 32GB in center socket and remaining sockets with 16GB DIMMs

The following memory options are available from HP:

Memory

NOTE: DIMM banks are active only when the corresponding processor socket is populated.

Registered DIMMs (RDIMMs)

| | |
|--|------------|
| HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593907-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593911-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604500-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593913-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604502-B21 |
| HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 593915-B21 |
| HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit | 627808-B21 |
| HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit | 627810-B21 |

NOTE: Memory must be installed in like-pairs, i.e. two of the same size.

NOTE: Memory bus speeds will operate as follows: 2-4 DIMMs at 800MHz; 6 at 667MHz; 8 at 533MHz.

Upgrade Options



Memory

HP DL585 G7 CPU Memory Secondary Upgrade Option


590489-B21

NOTE: Adds processor sockets 3 and 4.



Storage

1-8 Eight SFF SAS hot plug hard drive bays

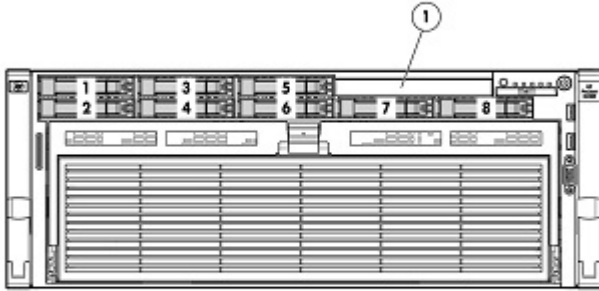

Drive Support

| | Quantity Supported | Position Supported | Controller |
|-----------------------------------|--------------------|--------------------|-----------------|
| Removable Media | | | |
| Slimline DVD-ROM drive | Up to 1 | 1 | Integrated SATA |
| HP Slim SATA DVD RW Optical Drive | Up to 1 | 1 | Integrated SATA |

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

| | Quantity Supported | Position Supported | Controller |
|------------------|--|--------------------|---|
| 900GB 6G SAS 10K | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 600GB 6G SAS 10K | | | HP Smart Array P212/256 MB Controller |
| 450GB 6G SAS 10K | | | HP Smart Array P410/256 MB Controller |
| 300GB 6G SAS 10K | | | HP Smart Array P410/512 MB BBWC Controller |
| 146GB 6G SAS 15K | | | HP Smart Array P410/512 MB FBWC Controller |
| 72GB 6G SAS 15K | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | HP Smart Array P411/512MB Flash Backed Write Cache | | |



Storage

HP Smart Array P812/512 BBWC Controller

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|-------------------|--------------------|--------------------|--|
| 1TB 6G SAS 7.2K | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 500GB 6G SAS 7.2K | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P812/512 BBWC Controller |

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|--------------------|--------------------|--------------------|--|
| 1TB 3G SATA 7.2K | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 500GB 3G SATA 7.2K | | | HP Smart Array P212/256 MB Controller |
| 160GB 3G SATA 7.2K | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P812/512 BBWC Controller |

SATA Hot Plug 2.5" Enterprise Mainstream Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|---------------------|--------------------|--------------------|--|
| 400GB 3.0G SATA SSD | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 200GB 3.0G SATA SSD | | | HP Smart Array P212/256 MB Controller |
| 120GB 3.0G SATA SSD | | | HP Smart Array P410/256 MB Controller |
| 100GB 3.0G SATA SSD | | | HP Smart Array P410/512 MB BBWC Controller |
| 60GB 3.0G SATA SSD | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P812/512 BBWC Controller |



Storage

6G SAS Hot Plug Enterprise Performance Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|----------------------|--------------------|--------------------|--|
| 400GB 6G SAS SLC SFF | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 200GB 6G SAS SLC SFF | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P812/512 BBWC Controller |

6G SAS Hot Plug Enterprise Mainstream Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|----------------------|--------------------|--------------------|--|
| 800GB 6G SAS MLC SFF | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 400GB 6G SAS MLC SFF | | | HP Smart Array P212/256 MB Controller |
| 200GB 6G SAS MLC SFF | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P812/512 BBWC Controller |

External Storage

| | Quantity Supported | Position Supported | Host Controller or Adapter |
|------------------------|--------------------|--------------------|--|
| 70 Modular Smart Array | Up to 2 | External | HP Smart Array P211/256 MB Controller |
| | Up to 4 | External | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |
| D2600 Disk Enclosure | Up to 4 | External | HP Smart Array P211/256 MB Controller |
| | Up to 8 | External | HP Smart Array P411/256MB BBWC Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |



Storage

| | | | |
|----------------------|---------|----------|--|
| D2700 Disk Enclosure | Up to 2 | External | HP Smart Array P211/256 MB Controller |
| | Up to 4 | External | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/1G Flash Backed Write Cache Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

Maximum Storage Capacity - (External Enclosures Attached)

| | |
|----------|---|
| Internal | 8TB (8 x 1TB SFF SAS/SATA Drives) |
| External | 192TB (8 D2600 enclosures @ 12 drives per enclosure x 2TB SATA) |
| Total | 200TB |

Maximum Storage Capacity - (External Enclosures Attached)

| | |
|----------|---|
| Internal | 8TB (8 x 1TB SFF SAS/SATA Drives) |
| External | 100TB (4 D2700 enclosures @ 25 drives per enclosure x 1TB SATA) |
| Total | 108TB |

Tape and Disk-Based Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of \RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk and tape backup products see: <http://www.hp.com/go/connect>.

| | Position Supported | Controller | Controller Part Number |
|----------------------------|--------------------|---|------------------------|
| HP SCSI Tape Drives | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| LTO-1 Ultrium 232 | | | |
| LTO-2 Ultrium 448 | | | |
| LTO-3 Ultrium 920 | | | |
| LTO-3 Ultrium 960 | | | |
| LTO4 Ultrium 1760 | | | |
| LTO-4 Ultrium 1840 | | | |
| DAT 40 | | | |
| DAT 72 | | | |
| DAT 160 | | | |
| 1U Rack-Mount Kit | | | |
| 3U Rack-Mount Kit | | | |
| HP USB Tape Drives | External | USB 2.0 Port | N/A |
| DAT 40 | | | |
| DAT 72 | | | |
| DAT 160 | | | |
| DAT 320 | | | |
| 1U USB Rack-Mount Kit | | | |
| HP SAS Tape Drives | External | HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller | 462828-B21 |
| DAT 160 | | | |



Storage

DAT 320
 LTO-2 Ultrium 448
 LTO-3 Ultrium 920
 LTO-4 Ultrium 1760
 LTO-4 Ultrium 1840
 LTO-5 Ultrium 3000
 LTO-5 Ultrium 3280
 1U Rack-Mount Kit
 3U Rack-Mount Kit

NOTE: Please check the full compatibility information at:
<http://www.hp.com/go/connect>

| | | | |
|--|----------|---|------------|
| HP SCSI Tape Autoloaders DAT 72x10 Autoloader 1/8 G2 Autoloader | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter NOTE: Please check the full compatibility information at: http://www.hp.com/go/connect | 412911-B21 |
|--|----------|---|------------|

| | | | |
|---|----------|--|--------|
| HP SCSI Tape Libraries, External MSL2024 MSL4048 MSL8096 MSL6000 | External | HP U320e SCSI Dual Channel Host Bus Adapter NOTE: Please check the full compatibility information at: http://www.hp.com/go/connect | AH627A |
|---|----------|--|--------|

| | | | |
|--|----------|--|------------|
| HP SAS Tape Autoloaders and Libraries 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096 | External | HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller NOTE: Please check the full compatibility information at: http://www.hp.com/go/connect | 462828-B21 |
|--|----------|--|------------|

| | | | |
|--|----------|---|-----|
| HP Fibre Channel Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000 | External | Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpecs. | N/A |
|--|----------|---|-----|

| | | | |
|--|----------|--------------|-----|
| HP USB RDX Removable Disk Backup System RDX160 RDX320 RDX500 RDX750 RDX1TB | External | USB 2.0 Port | N/A |
|--|----------|--------------|-----|

| | | | |
|---|----------|---|-----|
| HP D2D Backup Systems, iSCSI D2D2503i D2D4004i | External | Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended. | N/A |
|---|----------|---|-----|



Storage

HP D2D Backup Systems,
Fibre Channel
D2D4000fc

External

Direct server attach is not supported, requires connection via SAN fabric. See: <http://www.hp.com/go/connect>

N/A



Power Specifications

| HP 1200W Common Slot Silver Hot Plug Power Supply Kit | | | | | | | |
|---|------------|------|------|------|------|------|------|
| Part Number | 500172-B21 | | | | | | |
| Input Voltage Range (Vrms) | 100 to 240 | | | | | | |
| Frequency Range (Nominal) (Hz) | 50/60 | | | | | | |
| Nominal Input Voltage (Vrms) | 100 | 120 | 200 | 208 | 220 | 230 | 240 |
| Maximum Rated Output Wattage Rating | 800 | 900 | 1200 | 1200 | 1200 | 1200 | 1200 |
| Nominal Input Current (A rms) | 9.7 | 9.0 | 7.0 | 6.8 | 6.4 | 9.1 | 5.9 |
| Maximum Rated Input Wattage Rating (Watts) | 930 | 1034 | 1348 | 1348 | 1348 | 1348 | 1348 |
| Maximum Rated VA (Volt-Amp) | 970 | 1079 | 1406 | 1406 | 1406 | 1406 | 1406 |
| Efficiency (%) | 86 | 87 | 89 | 89 | 89 | 89 | 89 |
| Power Factor | 0.97 | | | | | | |
| Leakage Current (mA) | 0.42 | 0.50 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |
| Maximum Inrush Current (A peak) | 30 | | | | | | |
| Maximum Inrush Current duration (mS) | 20 | | | | | | |
| Maximum British Thermal Unit Rating (BTU-Hr) | 3174 | 3530 | 4600 | 4600 | 4600 | 4600 | 4600 |

| HP 1200W Common Slot Platinum Hot Plug Power Supply Kit | | | | | | | |
|---|------------|------|------|------|------|------|------|
| Part Number | 578322-B21 | | | | | | |
| Input Voltage Range (Vrms) | 100 to 240 | | | | | | |
| Frequency Range (Nominal) (Hz) | 50/60 | | | | | | |
| Nominal Input Voltage (Vrms) | 100 | 120 | 200 | 208 | 220 | 230 | 240 |
| Maximum Rated Output Wattage Rating | 800 | 900 | 1200 | 1200 | 1200 | 1200 | 1200 |
| Nominal Input Current (A rms) | 9.3 | 8.6 | 6.7 | 6.5 | 6.1 | 5.8 | 5.6 |
| Maximum Rated Input Wattage Rating (Watts) | 889 | 989 | 1290 | 1290 | 1290 | 1290 | 1290 |
| Maximum Rated VA (Volt-Amp) | 927 | 1031 | 1345 | 1345 | 1345 | 1345 | 1345 |
| Efficiency (%) | 90 | 91 | 93 | 93 | 93 | 93 | 93 |
| Power Factor | 0.97 | | | | | | |
| Leakage Current (mA) | 0.42 | 0.50 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |
| Maximum Inrush Current (A peak) | 30 | | | | | | |
| Maximum Inrush Current duration (mS) | 20 | | | | | | |
| Maximum British Thermal Unit Rating (BTU-Hr) | 3033 | 3375 | 4403 | 4403 | 4403 | 4403 | 4403 |



Power Specifications

NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url:
www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor



Technical Specifications

| | | | |
|--------------------|---|--|---|
| System Unit | Dimensions (H x W x D) (with bezel) | 6.94" x 19.0" x 27.55" (17.6cm x 48.3cm x 70.0cm) | |
| | Weight (approximate) | Maximum | 100.0 lb (45.4 kg) |
| | | (all hard drives, power supplies, DIMMs and processors installed) | |
| | | Minimum | 66.0 lb (30.0 kg) |
| | | (one hard drive, two power supplies, four DIMMs and two processors installed) | |
| | Input Requirements (per power supply) | Rated Line Voltage | 100 - 127 VAC, 200 - 240 VAC |
| | | Rated Input Current | 12 A (at 100 VAC), 8 A (at 200 VAC) |
| | | Rated Input Frequency | 50 to 60 Hz |
| | | Rated Input Power | 1161 W (at 100 VAC), 1598 W (at 240 VAC) |
| | BTU Rating | Maximum | 3960 BTU/hr (at 100 VAC), 5450 BTU/hr (at 200 VAC) |
| | Power Specifications | <p>NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor</p> <ul style="list-style-type: none"> • Click on the system of interest. Example: DL585 G7 • Follow the instructions of the next screens | |
| | Power Supply Output (per power supply) | Rated Steady-State Power | 910 W (low line), 1300 W (high line) |
| | | Maximum Peak Power | 910 W (low line), 1300 W (high line) |
| | System Inlet Temperature | Operating | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). |
| | | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). |
| | Relative Humidity (non-condensing) | Operating | 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing. |
| | | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |



Technical Specifications

| | | |
|--------------------------------|--|---|
| Altitude | Operating | 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). | |
| | Idle | |
| | L WAd | 6.8 B (with PCI-E) |
| | L pAm | NA dBA |
| Emissions Classification (EMC) | Operating | |
| | L WAd | 6.8 B (with PCI-E) |
| | L pAm | NA dBA |
| | FCC Rating | Class A |
| | Normative Standards | CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

| | | |
|---|--------------------------|--|
| Integrated Lights-Out 3 (iLO 3) integrated on system board | Architecture | PCI Express based health and remote management ASIC |
| | Processor | PCI Express RISC processor core running at 250MHz |
| | Upgradeability | Option firmware upgradeable via Flash ROM. |
| | Interfaces | One Ethernet Sideband connection (10/100/1000 Mb/s) |
| | | One Ethernet network connection (10/100Mb/s) |
| | Memory | 128-MB RAM with ECC |
| | Operating System Support | Microsoft Windows 2008 R2 |
| | | Microsoft Windows 2008 (32 bit and 64 bit) |
| | | Microsoft Windows Server 2008 Standard Edition (32bit and 64bit) |
| | | Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit) |
| Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition, Enterprise Edition | | |
| Red Hat Enterprise Linux 5.4 (32 bit and 64 bit) | | |
| SUSE Linux Enterprise Server 11 (32bit and 64bit) | | |
| SUSE Linux Enterprise Server 10 (32bit and 64bit) | | |
| | VMware ESX 4.0 | |



Technical Specifications

| | |
|---------------------------------------|---|
| Client System Support | VMware ESX 3.5.0 Microsoft Windows 7 Microsoft Windows XP Professional Edition Microsoft Windows Vista Business and Ultimate Editions Red Hat Enterprise Desktop 5.00 SUSE Linux Enterprise Desktop 11 SUSE Linux Enterprise Desktop 10 |
| Client Browser Support | Microsoft Internet Explorer 8 Microsoft Internet Explorer 7 Microsoft Internet Explorer 6 Firefox 3.5 (on supported Windows and Linux systems) Firefox 3.0 (on supported Windows and Linux systems) |
| Command Line Support | Secure Shell and serial port access Secure Socket Layer Secure Shell version 2 |
| Security | Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface AES encryption of video RC4 encryption of video |
| Directory Support Services | Active Directory v1.0 (Windows 2003) |
| Driver Support | HP ProLiant iLO3 Management Controller Driver Package |
| Management protocols supported | SNMP, IPMI 2.0 (system and LAN interface), DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP), HP RIBCL XML |

| | | |
|-------------------------------------|---|---|
| Smart Array P410i Controller | Dimensions | Embedded |
| | Disk Drive and Enclosure Interface - Transfer rate | 6Gb/s SAS (Serial Attached SCSI) 3Gb/s SATA (Serial ATA) |
| | SAS Connectors | 2 internal 4X connectors |
| | Cache Memory Speed | DDR2-800MHz with 40 or 72-bit wide bus |
| | Server Interface | x4 PCIe 2.0 provides 2GB/s maximum bandwidth |
| | SAS Speed | 8 6Gb/s SAS links provide 4.8GB/s maximum bandwidth |
| | Cache Memory | Zero Memory RAID has no cache memory 40-bit 256MB ECC protected cache (battery upgrade available) 72-bit 512MB BBWC or 72-bit 512MB and 1G FBWC |
| | Logical Drives Supported | Zero Memory, Up to 2 logical volumes (8 physical drives) Up to 64 logical drives with cache |
| | Host Memory Addressing | 64-bit, supporting greater than 4GB server memory space |
| | RAID Support | RAID 6, 6+0 (Advanced Data Guarding) NOTE: RAID 6, 6+0 can be enabled with one of the following combinations: |

- [256 MB cache, Battery kit and Smart Array Advanced Pack License key](#)



Technical Specifications

- option upgrades
- 512 MB BBWC/FBWC and Smart Array Advanced Pack License key option upgrades
- 1G FBWC and Smart Array Advanced Pack License key option upgrades

RAID 5, 5+0 (Distributed Data Guarding)

NOTE: A minimum of 256 MB cache is required to enable RAID 5, 5+0 support

RAID 1+0 (Striping & Mirroring)

RAID 0 (Striping), RAID 1 (Mirroring)

| | | |
|---|-----------------------|---|
| HP NC375i Integrated Quad Port Gigabit Server Adapter | Network Interface | 10/100/1000-T |
| | Compatibility | IEEE 802.3 10Base-T |
| | | IEEE 802.3ab 1000Base-T |
| | | IEEE 802.3u 100Base-TX |
| | | IEEE 802.3ad 1000Base-TX |
| | | IEEE 802.1p 100Base-TX |
| | | IEEE 802.1q 100Base-TX |
| | Data Transfer Method | PCI Express 2.0 x8 |
| | Controller | Qlogic/NetXen NX3031 |
| | Network Transfer Rate | 10Base-T (Full-Duplex) |
| 100Base-TX (Full-Duplex) | | 200 Mb/s |
| 1000Base-TX (Full-Duplex) | | 2000 Mb/s |
| Connector | RJ-45 | |
| Cable Support | 10Base-T | Categories 3, 4, or 5 UTP; up to 328 ft (100 m) |
| | 10/100/1000 Base-TX | Category 5 UTP up to 328 ft (100 m) |

| | | |
|--|--------------------------------------|--|
| Environment-friendly Products and Approach | End-of-life Management and Recycling | Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. |
|--|--------------------------------------|--|

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



Technical Specifications

© Copyright 2011 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. AMD, the AMD Arrow logo, AMD Opteron™, and combinations thereof, are trademarks of Advanced Micro Devices, Inc.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

