

Emulex 10GbE Virtual Fabric Adapter II and III family for IBM System x

IBM Redbooks Product Guide

As server virtualization technology becomes more prevalent within data centers, more dynamic performance is needed for network bandwidth to satisfy these demands. The Emulex 10GbE Virtual Fabric Adapters II and III for IBM® System x® can help you break the I/O bottleneck by allowing you to allocate bandwidth where it's needed, delivering maximum application agility. Offering a full range of virtualization and convergence capabilities, the same network hardware offers Ethernet, iSCSI, or Fibre Channel over Ethernet with bandwidth that is allocated in increments from 100 Mb to 10 Gb. The next-generation Virtual Fabric Adapter for IBM System x is a fast, flexible, easy, and reliable solution for I/O virtualization.

The Emulex 10GbE Virtual Fabric Adapter II and Emulex Dual Port 10GbE SFP+ VFA III are shown in Figure 1 (these adapters look the same).

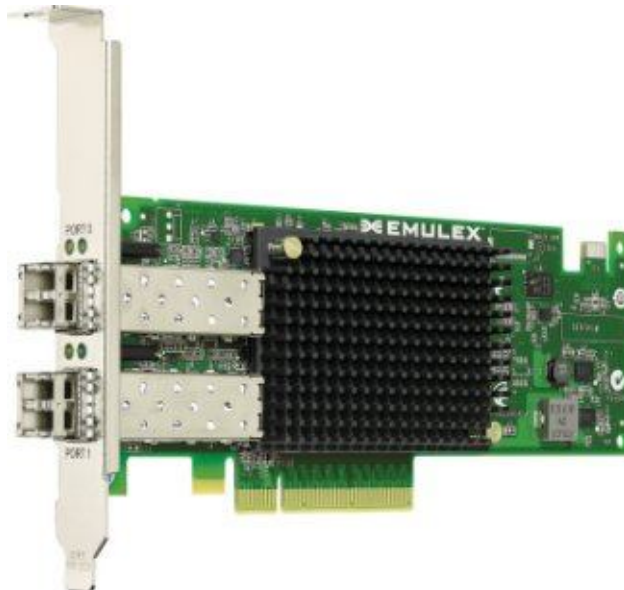


Figure 1. Emulex 10GbE Virtual Fabric Adapter II and Emulex Dual Port 10GbE SFP+ VFA III (with optional SFP+ transceivers installed)

Did you know

With IBM Virtual Fabric, up to eight virtual network ports (vNICs) can be created with a single two-port 10 GbE network adapter. Converged protocols such as iSCSI and FCoE are also supported on selected configurations. By using a common infrastructure for Ethernet and SAN, and by virtualizing your network adapter, you can reduce your infrastructure capital expense.

Part number information

All adapters in the Emulex 10GbE Virtual Fabric Adapter family listed in Table 1 offer the same features and functions. There is a difference in the manner that they are field-upgradeable from an Ethernet-only-mode-of-operation to an Ethernet, FCoE and iSCSI mode-of-operation:

- VFA II adapters are designed to use a paper-key license where IBM provides a license security to be used at the Emulex web site once registered. Emulex provides the user with a different license key that is subsequently administered to the server. VFA II adapters are supported on the M2, M3 and X5 generation of IBM System x servers.
- VFA III adapters provide a much easier and efficient software license enablement process. IBM's Feature on Demand process reduces the complexity of activating the license to just a few clicks of the mouse. VFA III is supported on the M4 generation of IBM system x Servers.

Customers and system designers need to note that VFA II and VFA III adapters, as well as the subset of VFA III PCIe, Integrated, and Mezzanine form-factors have different license key part numbers.

Table 1. Ordering part number and feature code

Description	Part number	Feature code
VFA III adapters for System x M4 servers		
Emulex Dual Port 10GbE SFP+ VFA III for IBM System x	95Y3762	A2U1
Emulex Dual Port 10GbE SFP+ Integrated VFA III for IBM System x*	SBB 95Y3768*	A2UN
Emulex VFA III FCoE/iSCSI License for IBM System x (for 95Y3762 and SBB 95Y3768)	95Y3760	A2U2
Embedded VFA III adapters for System x M4 servers (do not consume a regular PCIe slot)		
Emulex Dual Port 10GbE SFP+ Embedded Adapter for IBM System x	90Y6456	A22J
Emulex Embedded VFA III FCoE/iSCSI License for IBM System x (for 90Y6456)	90Y5178	A2TE
VFA II adapters for System x M3 and X5 servers		
Emulex 10GbE Virtual Fabric Adapter II for IBM System x	49Y7950	A18Z
Emulex 10GbE Integrated Virtual Fabric Adapter II for IBM System x	SBB 49Y7940#	A148
Emulex VFA II FCoE/iSCSI License for IBM System x (for 49Y7950 and SBB 49Y7940)	49Y4274	5715
Emulex Dual-port VFA II Adapter and FCoE/iSCSI License for IBM System x	95Y3751	A348

* This adapter can only be ordered via the configure-to-order (CTO) processor or via special bid.

This adapter comes standard with the most models of the IBM System x3850 X5, x3950 X5 and x3690 X5. It can also can be ordered via CTO or via special bid for those systems only.

The adapters, when shipped as stand-alone options, include the following items:

- One Emulex 10 GbE Virtual Fabric Adapter
- 3U bracket attached with 2U bracket included in the box (95Y3762 and 49Y7950 only)
- Quick Install Guide
- Warranty information and Important Notices flyer
- Documentation CD

The Emulex Dual Port 10GbE SFP+ Embedded Adapter is designed to fit into a special slot in selected servers (see Table 4), allowing you to use the PCIe slots for other technologies. The adapter is shown in Figure 2.



Figure 2. Emulex Dual Port 10GbE SFP+ Embedded Adapter

The Emulex 10GbE Integrated Virtual Fabric Adapter II (Figure 3) has the same functional characteristics as the Emulex 10GbE Virtual Fabric Adapter II (Figure 1). This adapter must be purchased at the same time as the new IBM eX5 server (x3850 X5 and x3690 X5). It is factory installed into a standard PCIe slot, and is offered at a price savings compared to the Emulex 10GbE Virtual Fabric Adapter II. For this special price, there is a limit of one Emulex 10GbE Integrated Virtual Fabric Adapter II per system. The Emulex 10GbE Integrated Virtual Fabric Adapter II is shown in Figure 3.



Figure 3. Emulex 10GbE Integrated Virtual Fabric Adapter II (without optional SFP+ transceivers)

Similarly, the Emulex Dual Port 10GbE SFP+ Integrated VFA III has the same functional characteristics as the Emulex Dual Port 10GbE SFP+ VFA III. The integrated adapter must be purchased at the same time as the new supported server (see Table 4). The integrated adapter is factory installed into a standard PCIe slot, and is offered at a price savings compared to the Emulex Dual Port 10GbE SFP+

VFA III. For this special price, there is a limit of one Emulex Dual Port 10GbE SFP+ Integrated VFA III per system.

Supported transceivers and direct-attach cables

The Emulex 10 GbE Virtual Fabric Adapters have two empty SFP+ cages that support SFP+ SR transceivers and twin-ax direct-attached copper cables as listed in Table 2 and Table 3 respectively.

Table 2. Supported transceivers

Description	Part number	Feature Code
Brocade 10Gb SFP+ SR Optical Transceiver	49Y4216	0069
QLogic 10Gb SFP+ SR Optical Transceiver	49Y4218	0064
IBM 10Gb SFP+ SR Optical Transceiver	46C3447	5053
IBM SFP RJ45 Transceiver	81Y1618	3268

Table 3. Supported direct-attach cables

Description	Part number	Feature Code	Supported switches		
			Brocade VDX 6730	IBM G8124E, IBM G8264	Juniper EX4500
Passive direct-attach cables					
0.5m IBM Passive DAC SFP+ Cable	00D6288	A3RG	No	Yes	No
1 m IBM Passive DAC-SFP+ Cable	90Y9427	A1PH	No	Yes	No
3 m IBM Passive DAC-SFP+ Cable	90Y9430	A1PJ	No	Yes	No
5 m IBM Passive DAC-SFP+ Cable	90Y9433	A1PK	No	Yes	No
1m Juniper DAC SFP+ Cable	68Y6927	5986	No	No	Yes
3m Juniper DAC SFP+ Cable	68Y6947	5987	No	No	Yes
Active direct-attach cables					
1m IBM Active DAC SFP+ Cable	95Y0323	A25A	No	Yes	No
3m IBM Active DAC SFP+ Cable	95Y0326	A25B	No	Yes	No
5m IBM Active DAC SFP+ Cable	95Y0329	A25C	No	Yes	No
1m 10GE Twinax Act Copper SFP+	81Y8295	A18M	Yes	No	Yes
3m 10GE Twinax Act Copper SFP+	81Y8296	A18N	Yes	No	Yes
5m 10GE Twinax Act Copper SFP+	81Y8297	A18P	Yes	No	Yes

For a complete list of supported SFP+ transceivers and DAC cables refer to the IBM RETAIN tip H203108, *Support list matrix for SFP and Twinax DAC cables - Converged Network Adapters*, available from:

<http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5087884>

Features

The members of the Emulex 10 GbE Virtual Fabric Adapter family have the following features and benefits:

- Dual-channel, 10 Gbps Ethernet controller
- Line-rate 10 GbE performance
- 2 SFP+ empty cages to support either SFP+ SR or twin-ax copper connections
 - SFP+ SR link is with SFP+ SR optical module with LC connectors
 - SFP+ twin-ax copper link is with SFP+ direct attached copper module/cable
- TCIP/IP stateless offloads
- TCP chimney offload
- Hardware parity, CRC, ECC, and other advanced error checking
- PCI Express 2.0 x8 host interface
- Low-profile form-factor or slot-less mezzanine card form-factor design
- IPv4/IPv6 TCP, UDP checksum offload
- VLAN insertion and extraction
- Support for jumbo frames up to 9000 bytes
- Preboot eXecution Environment (PXE) 2.0 network boot support
- Interrupt coalescing
- Load balancing and failover support
- Based on Emulex OneConnect technology and including FCoE and iSCSI support as a feature entitlement upgrade
- Simplifies I/O hardware choices for IT managers
- Maximizes I/O consolidation with high-performance 10GbE ports
- One network infrastructure reduces CapEx
- One management console reduces OpEx
- Leverages existing IT investments
- Deploy and manage this and other Emulex OneConnect-based adapters with OneCommand Manager

The Emulex VFA II and III adapters can be upgraded in the field to enable FCoE and iSCSI hardware initiator.

Supported servers

The Emulex 10GbE Virtual Fabric Adapter family are supported in the IBM System x and iDataPlex® servers listed in the following table.

Table 4. Supported System x and iDataPlex servers (Part 1)

Part number	Product description	x3200 M3 (7327, 7328)	x3250 M3 (4251, 4252)	x3400 M3 (7378, 7379)	x3500 M3 (7380)	x3550 M3 (7944)	x3620 M3 (7376)	x3630 M3 (7377)	x3650 M3 (7945)	x3755 M3 (7164)	dx360 M3 (6391)
95Y3762	Emulex Dual Port 10GbE SFP+ VFA III	N	N	N	N	N	N	N	N	N	N
SBB 95Y3768	Emulex Dual Port 10GbE SFP+ Integrated VFA III	N	N	N	N	N	N	N	N	N	N
95Y3760	Emulex VFA III FCoE/iSCSI License	N	N	N	N	N	N	N	N	N	N
90Y6456	Emulex Dual Port 10GbE SFP+ Embedded Adapter	N	N	N	N	N	N	N	N	N	N
90Y5178	Emulex Embedded VFA III FCoE/iSCSI License	N	N	N	N	N	N	N	N	N	N
49Y7950	Emulex 10GbE Virtual Fabric Adapter II	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
SBB 49Y7940	Emulex 10GbE Integrated Virtual Fabric Adapter II	N	N	N	N	N	N	N	N	N	N
49Y4274	Emulex VFA II FCoE License for IBM System x	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
95Y3751	Emulex Dual-port VFA II Adapter and FCoE/iSCSI License	Y	N	Y	Y	Y	Y	Y	Y	N	Y

Table 4. Supported System x and iDataPlex servers (Part 2)

Part number	Product description	x3100 M4 (2582)	x3250 M4 (2583)	x3300 M4 (7382)	x3500 M4 (7383)	x3530 M4 (7160)	x3550 M4 (7914)	x3630 M4 (7158)	x3650 M4 (7915)	x3690 X5 (7147)	x3750 M4 (8722)	x3850 X5 (7143)	dx360 M4 (7912)
95Y3762	Emulex Dual Port 10GbE SFP+ VFA III	N	N	Y	Y	Y	Y	Y	Y	N	Y	N	N
SBB 95Y3768	Emulex Dual Port 10GbE SFP+ Integrated VFA III	N	N	Y	Y	Y	N	Y	N	N	N	N	N
95Y3760	Emulex VFA III FCoE/iSCSI License	N	N	Y	Y	N	Y	N	Y	N	Y	N	N
90Y6456	Emulex Dual Port 10GbE SFP+ Embedded Adapter	N	N	N	N	N	Y	N	Y	N	N	N	Y
90Y5178	Emulex Embedded VFA III FCoE/iSCSI License	N	N	N	N	N	N	N	N	N	N	N	N
49Y7950	Emulex 10GbE Virtual Fabric Adapter II	N	N	N	N	N	N	N	N	Y	N	Y	Y
SBB 49Y7940	Emulex 10GbE Integrated Virtual Fabric Adapter II	N	N	N	N	N	N	N	N	Y	N	Y	N
49Y4274	Emulex VFA II FCoE License	N	N	N	N	N	N	N	N	Y	N	Y	N
95Y3751	Emulex Dual-port VFA II Adapter and FCoE/iSCSI License	N	N	N	N	N	N	N	N	Y	N	Y	N

See IBM ServerProven® for the latest information about the System x servers that support this adapter including support for older servers: <http://ibm.com/servers/eserver/serverproven/compat/us/>

Modes of operation

The Emulex 10GbE Virtual Fabric Adapter II and III support two types of virtual NIC (vNIC) operating modes, and a physical NIC (pNIC) operating mode:

- IBM Virtual Fabric Mode** (also known as vNIC1 mode) will only work with an IBM RackSwitch G8124E and G8264. In this mode, the Emulex adapter communicates with the IBM switch to obtain vNIC parameters (using DCBX). A special tag is added within each data packet and is later removed by the NIC and/or switch for each vNIC group to maintain separation of the virtual data paths.

In vNIC mode, each physical port is divided into four virtual ports for a maximum of eight (8) virtual NICs per adapter. The default bandwidth for each vNIC is 2.5 Gbps. Bandwidth for each vNIC can be configured via the IBM switch from 100 Mbps to 10 Gbps, up to a total of 10 Gb per physical port. The vNICs can also be configured to have 0 bandwidth if you must allocate the available bandwidth to fewer than four vNICs per physical port. In IBM Virtual Fabric Mode, you can change the bandwidth allocations through the IBM switch user interfaces without requiring a reboot of the server.

vNIC bandwidth allocation and metering is performed by both the switch and the VFA. In such a case, a bidirectional virtual channel of an assigned bandwidth is established between them for every defined vNIC.

In vNIC1 mode, storage protocols (FCoE and iSCSI) on vNICs are not supported.

- In **Switch Independent Mode** (also known as vNIC2 mode) the adapter works with any 10 Gb Ethernet switch. Switch Independent Mode offers the same capabilities as IBM Virtual Fabric Mode in terms of the number of vNICs and the bandwidth each can be configured to have. Switch Independent Mode extends the existing customer VLANs to the virtual NIC interfaces. The IEEE 802.1Q VLAN tag is essential to the separation of the vNIC groups by the NIC adapter or driver and the switch. The VLAN tags are added to the packet by the applications or drivers at each end station rather than by the switch.

vNIC bandwidth allocation and metering is only performed by VFA itself. In such a case, a unidirectional virtual channel is established where the bandwidth management is only performed for the outgoing traffic on a VFA side (server-to-switch). The incoming traffic (switch-to-server) uses the all available physical port bandwidth, as there is no metering performed on either the VFA or a switch side.

In vNIC2 mode, when storage protocols are enabled on the Emulex 10GbE Virtual Fabric Adapters, six vNICs (three per physical port) are Ethernet, and two vNICs (one per physical port) are either iSCSI or FCoE.

- In **pNIC mode** the adapter operates as a standard dual-port 10 Gbps Ethernet adapter, and it functions with any 10 GbE switch. In pNIC mode, with the Emulex FCoE/iSCSI License, the card operates in a traditional Converged Network Adapter (CNA) mode with two Ethernet ports and two storage ports (iSCSI or FCoE) available to the operating system.

Although all adapters in the Emulex 10GbE Virtual Fabric Adapter family support pNIC, vNIC1 and vNIC2 modes, availability of each operating mode is also dependent on the top-of-rack switch and the network or storage protocol used (Ethernet only - no storage protocols, iSCSI or FCoE), as shown in the following table.

Table 5. Available IBM VFA operating modes for Ethernet, iSCSI and FCoE configurations

Protocol	Switch	vNIC1	vNIC2	pNIC
Ethernet only	IBM G8124E	Yes	Yes	Yes
	IBM G8264	Yes	Yes	Yes
	Other compatible switches	No	Yes	Yes
iSCSI	IBM G8124E	No	Planned	Planned
	IBM G8264	No	Yes	Yes
	Juniper EX4500	No	Planned	Planned
FCoE	IBM G8124E (FCoE transit switch)	No	No	Planned
	Brocade VDX 6730	No	Yes	Yes
	Cisco Nexus 5010/5020	No	Yes	Yes

Supported FCoE and iSCSI configurations are shown in Table 6 and Table 7 respectively.

Table 6. Supported FCoE configurations

Virtual Fabric adapter	FCoE upgrade	VFA mode	Transit switch	FCF switch	SAN fabric	Storage targets
<ul style="list-style-type: none"> VFA III, 95Y3762 Integrated VFA III, SBB 95Y3768 	95Y3760				Planned	
<ul style="list-style-type: none"> Embedded Adapter, 90Y6456 	90Y5178				Planned	
<ul style="list-style-type: none"> VFA II, 49Y7950 VFA II and FCoE/iSCSI License, 95Y3751 	49Y4274 (not needed for 95Y3751)	<ul style="list-style-type: none"> vNIC2 pNIC 	<ul style="list-style-type: none"> None 	<ul style="list-style-type: none"> Brocade VDX 6730 	<ul style="list-style-type: none"> IBM B-type 	<ul style="list-style-type: none"> DS8000 IBM SVC V7000 IBM XIV
<ul style="list-style-type: none"> VFA II, 49Y7950 Integrated VFA II, SBB 49Y7940 VFA II and FCoE/iSCSI License, 95Y3751 	49Y4274 (not needed for 95Y3751)	<ul style="list-style-type: none"> vNIC2 pNIC 	<ul style="list-style-type: none"> None 	<ul style="list-style-type: none"> Cisco Nexus 5010 Cisco Nexus 5020 	<ul style="list-style-type: none"> Cisco MDS 	<ul style="list-style-type: none"> DS8000 IBM SVC V7000

Table 7. Supported iSCSI configurations

Virtual Fabric adapter	iSCSI upgrade	VFA mode	TOR switch	Storage targets
<ul style="list-style-type: none"> VFA III, 95Y3762 Integrated VFA III, SBB 95Y3768 	95Y3760	<ul style="list-style-type: none"> vNIC2 pNIC 	<ul style="list-style-type: none"> IBM G8264 	<ul style="list-style-type: none"> IBM SVC IBM XIV
<ul style="list-style-type: none"> Embedded Adapter, 90Y6456 	90Y5178			Planned
<ul style="list-style-type: none"> VFA II, 49Y7950 	49Y4274	<ul style="list-style-type: none"> vNIC2 pNIC 	<ul style="list-style-type: none"> IBM G8264 	<ul style="list-style-type: none"> IBM SVC IBM XIV
<ul style="list-style-type: none"> Integrated VFA II, SBB 49Y7940 VFA II and FCoE/iSCSI License, 95Y3751 	49Y4274 (not needed for 95Y3751)			Planned

Important: Use these tables only as a starting point. Configuration support must be verified through the IBM System Storage® Interoperation Center (SSIC) found at the following website:
<http://www.ibm.com/systems/support/storage/ssic>

Standards supported

The following IEEE standards are supported:

- IEEE 802.3ae (10 Gbps Ethernet XAUI)
- IEEE 802.1q (VLAN)
- IEEE 802.1Qbb (Priority flow control)
- IEEE 802.1Qaz (ETS and Congestion Management)
- IEEE 802.1p (QoS/CoS)
- IEEE 802.3ad (Link Aggregation)
- IEEE 802.3x (Flow Control)
- ANSI INCITS T11 FC-BB-5 2.0, FC-PI-2, FC-GS-4, FC-TAPE and FCP-3
- PCI Express base spec 2.0, PCI Bus Power Management Interface, rev. 1.2
- Advanced Error Reporting (AER)

Physical specifications

The standard form-factor adapter has the following physical specifications:

- Height: 167 mm (6.6 in)
- Width: 69 mm (2.7 in)
- Depth: 17 mm (0.7 in)

The mezzanine adapter has the following physical specifications:

- Height: 60 mm (2.4 in)
- Width: 160 mm (6.3 in)
- Depth: 17 mm (0.7 in)

Operating environment

This adapter is supported in the following environment:

- Temperature:
 - Operating: 0° to 55° C (32° to 131° F)
 - Non-operating: -40° to 70° C (-40° to 158° F)
- Humidity: 5 to 95%, non-condensing

[Back to top](#)

Warranty

One-year limited warranty. When installed in a System x server, these cards assume your system's base warranty and any IBM ServicePac® upgrade.

Popular configurations

The following figure shows Emulex 10GbE Virtual Fabric Adapter II installed in a supported rack server. The servers are connected to a 10 Gb Ethernet network using a pair of 10 Gb Ethernet switches.

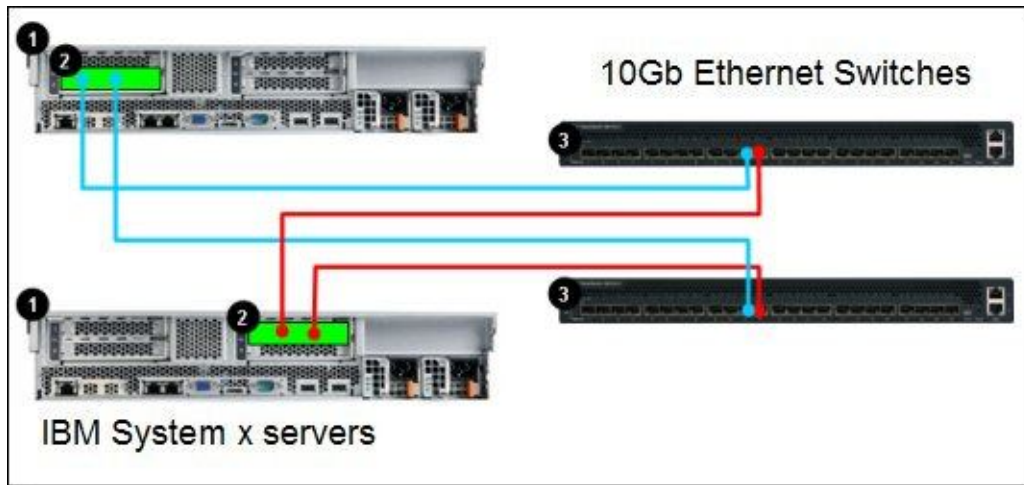


Figure 4. Popular configuration

The parts used are listed in the following table.

Table 8. Components used with the Emulex 10Gb Virtual Fabric Adapter (Figure 4)

Diagram reference	Part number/machine type	Description	Quantity
①	Varies	Supported server (See Table 4)	2
②	Varies	Emulex 10GbE Virtual Fabric Adapter (See Table 1)	2
②	Varies	Supported 10Gb SFP+ Transceivers or direct-attach cables (See Tables 2 and 3)	4
③	Varies	10Gb Ethernet Switch (IBM RackSwitch G8124-E is shown in Figure 4)	2

Note: If SFP+ transceivers are used, this configuration also requires fiber optic cabling between the servers and the switches.

When Emulex Virtual Fabric adapters are used with FCoE/iSCSI feature enabled, refer to IBM System Storage Interoperation Center (SSIC) for a list of supported FCoCEE configurations:

<http://www.ibm.com/systems/support/storage/ssic>

Supported operating systems

The Emulex 10GbE Virtual Fabric Adapter II and III family support the following operating systems:

- Microsoft Windows Server 2012
- Microsoft Windows Server 2008 R2
- Microsoft Windows Server 2008, Datacenter x64 Edition
- Microsoft Windows Server 2008, Datacenter x86 Edition
- Microsoft Windows Server 2008, Enterprise x64 Edition

- Microsoft Windows Server 2008, Enterprise x86 Edition
- Microsoft Windows Server 2008, Standard x64 Edition
- Microsoft Windows Server 2008, Standard x86 Edition
- Microsoft Windows Server 2008, Web x64 Edition
- Microsoft Windows Server 2008, Web x86 Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise x64 Edition
- Microsoft Windows Server 2003/2003 R2, Standard Edition
- Microsoft Windows Server 2003/2003 R2, Standard x64 Edition
- Microsoft Windows Server 2003, Web Edition
- Red Hat Enterprise Linux 6 Server Edition
- Red Hat Enterprise Linux 6 Server x64 Edition
- Red Hat Enterprise Linux 5 Server Edition
- Red Hat Enterprise Linux 5 Server x64 Edition
- Red Hat Enterprise Linux 5 Server Edition with Xen
- Red Hat Enterprise Linux 5 Server with Xen x64 Edition
- SUSE LINUX Enterprise Server 11 for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 for x86
- SUSE LINUX Enterprise Server 11 with Xen for AMD64/EM64T
- SUSE LINUX Enterprise Server 10 for AMD64/EM64T
- SUSE LINUX Enterprise Server 10 for x86
- SUSE LINUX Enterprise Server 10 with Xen for AMD64/EM64T
- VMware ESX 4.1
- VMware ESXi 4.1
- VMware ESX 4.0
- VMware ESXi 4.0

See IBM ServerProven at <http://ibm.com/servers/eserver/serverproven/compat/us/> for the latest information about the specific versions and service packs supported. Not all servers support all operating systems and versions.

Related publications

For more information refer to these documents:

- Emulex 10GbE Virtual Fabric Adapter Support CD
<http://www.ibm.com/support/entry/portal/docdisplay?Indocid=migr-5083288>
- 10Gb CNAs for IBM System x product page
<http://ibm.com/systems/x/options/storage/cna>
- IBM US Announcement Letter
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS111-223>
- IBM System x Configuration and Options Guide
<http://www.ibm.com/systems/xbc/cog/>

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service. IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing, IBM Corporation, North Castle Drive, Armonk, NY 10504-1785 U.S.A.

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you. This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk. IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you. Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products. This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

© Copyright International Business Machines Corporation 2011. All rights reserved.

Note to U.S. Government Users Restricted Rights -- Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

This document was created or updated on May 20, 2013.

Send us your comments in one of the following ways:

- Use the online **Contact us** review form found at:
ibm.com/redbooks
- Send your comments in an e-mail to:
redbook@us.ibm.com
- Mail your comments to:
IBM Corporation, International Technical Support Organization
Dept. HYTD Mail Station P099
2455 South Road
Poughkeepsie, NY 12601-5400 U.S.A.

This document is available online at <http://www.ibm.com/redbooks/abstracts/tips0844.html> .

Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both. These and other IBM trademarked terms are marked on their first occurrence in this information with the appropriate symbol (® or ™), indicating US registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of IBM trademarks is available on the Web at <http://www.ibm.com/legal/copytrade.shtml>

The following terms are trademarks of the International Business Machines Corporation in the United States, other countries, or both:

IBM®
iDataPlex®
Redbooks (logo)®
ServerProven®
ServicePac®
System Storage®
System x®

The following terms are trademarks of other companies:

Microsoft, Windows, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.