



WLA SERIES WIRELESS LAN ACCESS POINTS

WLA321, WLA322, WLA522,
WLA532, WLA632

Product Overview

The Juniper Networks WLA Series Wireless LAN Access Points provide client access, spectrum analysis, bridging, and wireless mesh services for indoor and outdoor deployments of enterprise wireless LANs (WLANs). Configured and controlled by Juniper Networks WLC Series Wireless LAN Controllers, the WLA Series performs deep packet inspection, encryption, traffic forwarding, and security enforcement locally, which results in optimized traffic flows, radically reduced latency, and massive scalability.

Product Description

The Juniper Networks® WLA Series Wireless LAN Access Points provide complete client access, spectrum analysis, mesh, and bridging services. Featuring support for 802.11n as well as 802.11a/b/g, the WLA Series provides seamless mobility both indoors and outdoors, and it enables scalable deployment of wireless voice over IP (VoIP), video, and real-time location services.

The WLA Series comes with complete security and networking services, along with advanced performance and scalability features which enable the access points to offload controllers by inspecting and forwarding traffic locally and performing encryption and security enforcement at the access point. The WLA Series also provides band steering, client load balancing, dynamic authorization, quality of service (QoS), bandwidth controls and dynamic call admission control (CAC)—all of which combine to ensure a more consistent user experience as traffic is more evenly distributed across controllers, access points, and radios. This also improves scalability, providing the same consistent user experience for thousands of mobile users and devices.

The WLA Series is simple to deploy and can easily be configured and managed remotely. Once installed, the WLA Series access points automatically monitor the data integrity and radio frequency (RF) signal strength of wireless channels, and continually tune for optimal RF channel and transmit power. Continuous scanning of the RF spectrum also allows early detection, classification, avoidance and remediation of performance degrading interference sources.

WLA Series access points enforce stringent prioritization of delay sensitive traffic for voice and other critical applications and provide granular quality of service (QoS), and bandwidth management capabilities on a per application, per user or per SSID basis. Wi-Fi Multimedia (WMM) or SpectraLink Voice Priority (SVP) can be configured to ensure optimal QoS for voice traffic. Access point policies allow per user, protocol or class-of-service (CoS) mapping.

WLA Series access points may also be deployed in branch locations away from a main campus in a controller-less plug and play deployment model. This reduces the cost and complexity of installing wireless access in remote sites. They can be managed via the WAN or through the Internet by controllers at headquarters, and will maintain local session persistence indefinitely, if the WAN link goes down. If the connection to the controller is lost, wireless services continue uninterrupted; connected clients maintain wireless connection to the AP, new clients can connect and authenticate locally, and the Wireless Intrusion Detection System (WIDS) continues. Furthermore, the new country code override feature in the remote AP profile allows the AP's channel and transmit power to be set to meet the specific country's regulatory requirement where it is located, independent of the location of the WLAN controller which is managing it.



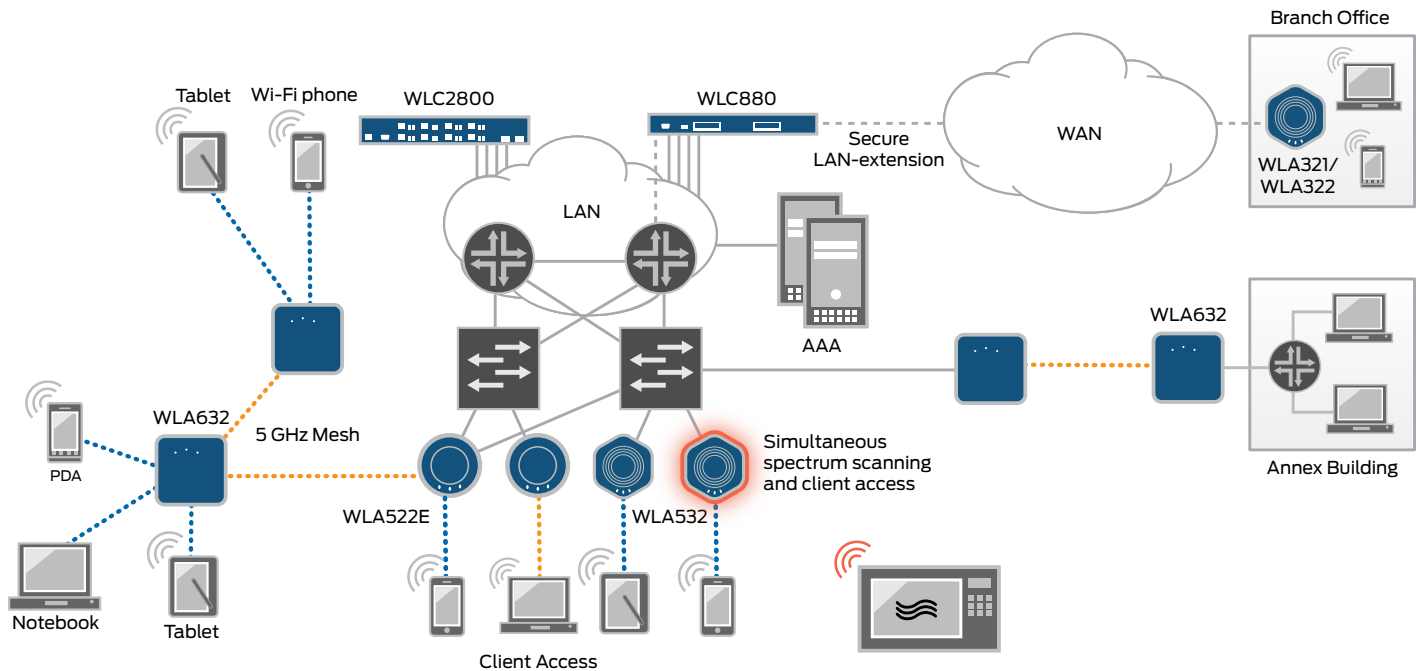


Figure 1: WLA Series Access Points provide client access, spectrum analysis, mesh, and bridging services

Table 1: Indoor and Outdoor Wireless Access Point Products

Product	Description
Indoor Wireless Access Points	
WLA321	<ul style="list-style-type: none"> Single-radio indoor access point for 802.11a/b/g/n Suitable for low to medium client density deployments
WLA322	<ul style="list-style-type: none"> Dual-radio indoor access point for 802.11a/b/g/n Suitable for low to medium client density deployments
WLA522	<ul style="list-style-type: none"> Dual-radio 2x2 MIMO:2SS high-performance indoor access point for 802.11a/b/g/n Optimized for high client density deployments requiring high capacity Available with external antenna ports for use with indoor or outdoor antennas
WLA532	<ul style="list-style-type: none"> Dual Radio 3x3 MIMO:3SS highest performance indoor access point for 802.11a/b/g/n with attractive packaging Optimized for very high client density deployments requiring highest capacity and coverage with data, voice and video applications Available in a plenum rated model which features external antenna ports for use with indoor or outdoor antennas
Outdoor Wireless Access Points	
WLA632	<ul style="list-style-type: none"> Dual-radio 3x3 MIMO:2SS high-performance outdoor access point for 802.11 a/b/g/n Ruggedized, weatherproof enclosure suitable for extreme outdoor environments Supports high-performance client access, long distance bridging, and mesh services

Features and Benefits

Security

With the highest security standards, WLA Series Wireless LAN Access Points support all relevant encryption methods, including Wi-Fi Protected Access 2 based on 802.11i (WPA2) and Wi-Fi Protected Access (WPA) in both enterprise (802.1X) and personal (pre-shared key) modes. There are no encryption keys, security credentials, or data stored locally, which eliminates any security risk if stolen or connected to an unauthorized network.

RF Management

The WLA Series plays a key role in rogue and intrusion detection as well as denial of service (DoS) attack detection. The WLA Series access points provide simultaneous support for both access service and spectrum analysis. This ensures early detection of common RF interferers and also allows for appropriate corrective actions to mitigate loss of performance due to interference. ActiveScan allows the WLA Series access points to fulfill a dual role, as the system scans all 802.11 channels while simultaneously providing wireless connectivity to mobile clients. SentryScan allows the WLA Series access points or individual access point radios to act as dedicated sentries, providing continuous scanning.

When rogue or interference sources are detected, the WLA Series access points coordinate with the WLC Series controllers for an appropriate mitigation response to ensure the highest air quality for efficient and high performing wireless access services. If an access point goes out of service and leaves a coverage hole, the WLC Series controllers can change channels or adjust power levels on multiple nearby access points in a coordinated fashion in order to restore Wi-Fi coverage and provide optimal reliability and performance.

Spectrum Intelligence

In addition to the typical RF scanning performed as a wireless intrusion measure, which is supported on all WLA Series access points, the WLA321, WLA322, WLA522, and WLA532 are also equipped to gather spectrum intelligence either as a dedicated spectrum sensor, or simultaneously together with client access. This enables better troubleshooting and avoidance of performance-degrading interference sources.

Working in conjunction with interference avoidance planning, advanced diagnostics, visualization and reporting features in RingMaster, the WLA522 and WLA532 can detect, classify and report a wide variety of non Wi-Fi interference sources. These include microwave ovens, spread-spectrum frequency hopping wireless devices, movement sensors, continuous wave transmitters (video cameras, wireless bridges) and many more that operate on the same unlicensed spectrum that Wi-Fi relies on.

Easy Installation

The WLA Series indoor access points ship with a flexible mounting kit designed for ceiling-mounted or wall-mounted deployment, with common mounting brackets for easy upgrades to 11n. The WLA Series is simple to deploy and can be configured and easily managed remotely.

The aesthetically appealing enclosure of the WLA Series indoor access points is designed to blend into typical office environments, minimizing attention to its function. The enclosure design resembles a smoke detector, making it less likely to be tampered with, while featuring a built-in Kensington lock system for added physical security.

Branch Office Deployment

WLA Series 11n access points support a "Remote AP" mode which permits a low-cost controller-less deployment model in branch locations. Without requiring any networking knowledge, anyone can physically install the access point. The branch access point initializes itself automatically by connecting back to a WLC Series controller at the main campus over an existing VPN or via encrypted tunnels through the Internet. Once initialized, the Remote AP provides client services, and can maintain operation with session persistence for an extended period in the event that WAN links fail.

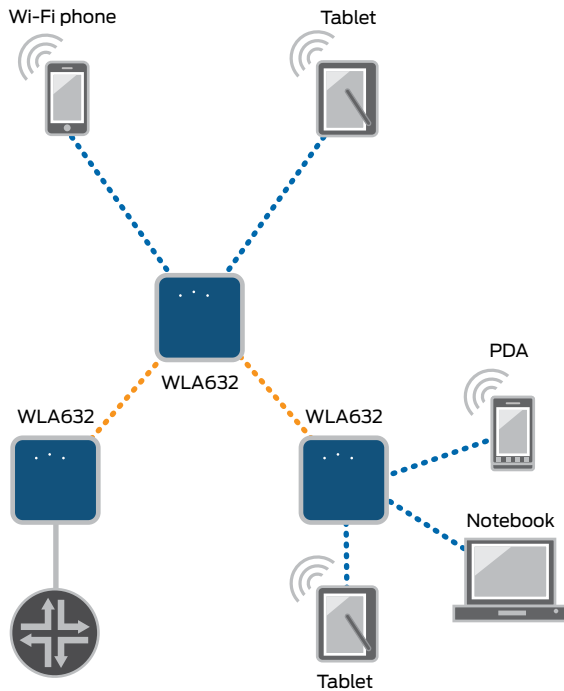


Figure 2: WLA Series wireless mesh services diagram

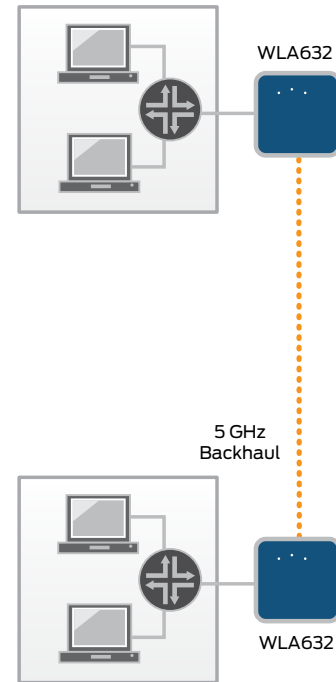


Figure 3: WLA Series wireless bridge services diagram

Outdoor Deployment

The WLA522 features external antenna ports, which allows for outdoor rated antennas to be mounted on a building exterior while the access point is mounted inside. The WLA632 outdoor access point comes in a ruggedized, weatherproof enclosure suitable for extreme outdoor environments and industrial-grade deployments. The WLA632 complies with NEMA4X and IP67 standards for corrosion resistance and features built-in lightning protection for antenna ports, as well as surge protection for Ethernet and power ports. The WLA632 also has automatic thermal management inside the access point and includes received signal strength indicator (RSSI) meter functions on LEDs for easy antenna alignment in the field.

Bridging and Mesh

In addition to traditional access point functionality, the WLA Series may also be deployed as a wireless mesh to extend the reach of enterprise WLANs beyond LAN cabling. Intelligent switching is supported in all mesh modes, enabling each mesh node to provide the shortest, least congested path to the destination over encrypted secure mesh links.

The WLA Series access points also support point-to-point bridging to provide seamless connectivity between buildings over a wireless backhaul, to avoid the expense, inconvenience, and delay of laying new cable.

Optimized Traffic Flows

WLA Series Wireless LAN Access Points take advantage of Juniper Networks highly distributed mobility architecture known as Smart Mobile, by performing encryption, deep packet inspection and forwarding locally at the access point. This not only improves scalability by offloading WLAN controllers, it also results in optimized traffic flows and radically reduced latency for real-time applications. Along with a wealth of dynamic load balancing techniques, this architecture ensures the scalability and performance to support the most demanding wireless applications, including video, voice over WLAN and real-time location services.

Real-Time Location Services

The WLA Series also supports location-based services that rely on Wi-Fi signal information for accurate three-dimensional positioning. Common applications include asset tracking, IT support and servicing, and network security based on client location.

Unlike many wireless location systems that rely on tags or client software on tracked devices, the WLA Series can detect the position of any active Wi-Fi device including smartphones as well as many medical devices.

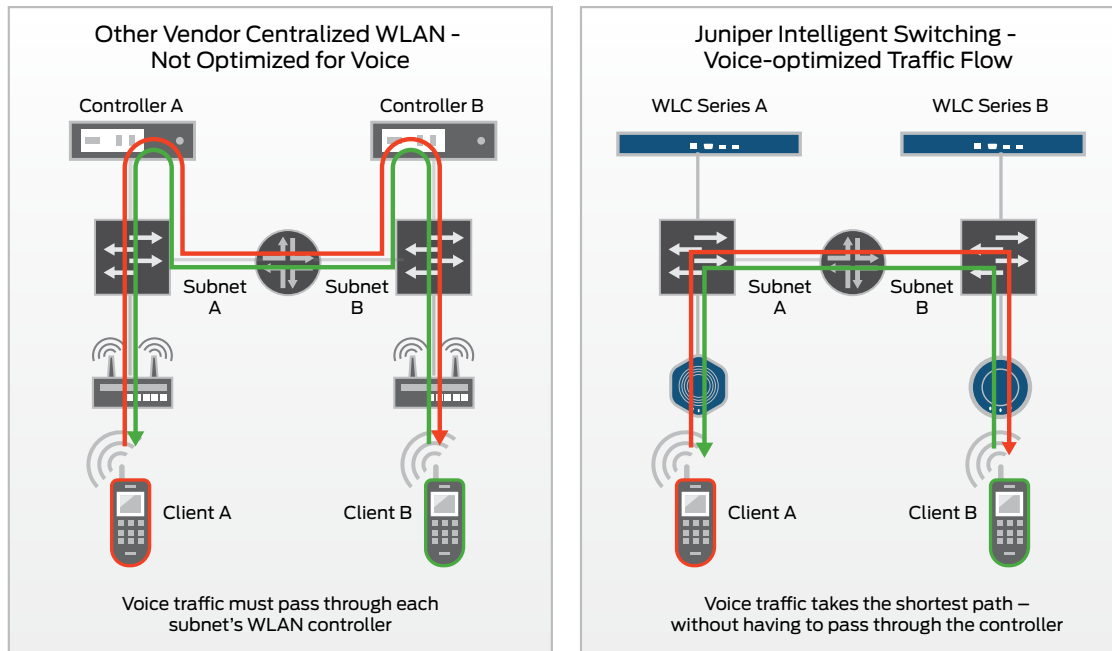


Figure 4: Local forwarding at the access point minimizes latency



WLA321 /
WLA322



WLA522



WLA532



WLA532E



WLA632

Features

	WLA321	WLA322	WLA522	WLA532	WLA632
Location	Indoor	Indoor	Indoor	Indoor	Outdoor
Radios	Single, selectable 802.11a/n (5 GHz) or 802.11b/g/n (2.4 GHz) operation	Dual with 802.11a/n (5 GHz) and 802.11b/g/n (2.4 GHz) concurrent operation	Dual with 802.11a/n (5 GHz) and 802.11b/g/n (2.4 GHz) concurrent operation	Dual with 802.11a/n (5 GHz) and 802.11b/g/n (2.4 GHz) concurrent operation	Dual with 802.11a/n (5 GHz) and 802.11b/g/n (2.4 GHz) concurrent operation
Internal omni-directional antennas	✓	✓	✓	✓	
802.11n Support					
MIMO: (# radio transmit and # radio receive chains)	2 x 2:2SS	2 x 2:2SS	2 x 2:2SS	3x3:3SS	3x3:2SS
Number of spatial streams	2	2	2	3	2
20 MHz and 40 MHz channels	✓	✓	✓	✓	✓
PHY Data Rates per Radio	up to 300 Mbps	up to 300 Mbps	up to 300 Mbps	up to 450 Mbps	up to 300 Mbps
Packet aggregation (A-MPDU, A-MSDU)	✓	✓	✓	✓	✓
Maximal Ratio Combining (MRC) for increasing AP receiver performance	✓	✓	✓	✓	✓
Cyclic Delay Diversity (CDD) for improved downlink performance	✓	✓	✓	✓	✓
Low Density Parity Check improves error correction efficiency for high throughput performance				✓	
Space Time Blocking Code (STBC) for improved reliability of data transfer	✓	✓	✓	✓	✓
Security					
Physical Security					
Safe tamper-proof design with completely sealed enclosure	✓	✓	✓	✓	✓
No data, security credentials, or encryption keys stored locally	✓	✓	✓	✓	✓
No console port; no local access is possible	✓	✓	✓	✓	✓
Stolen AP can be "blacklisted"	✓	✓	✓	✓	✓
Integrated Kensington security lock feature			✓		
Security Screw and Proprietary Tool	✓	✓		✓	
WIDS/WIPS					
ActiveScan: simultaneous scanning and client services	✓	✓	✓	✓	✓
SentryScan: dedicated scanning and mitigation	✓	✓	✓	✓	✓
Mesh/Bridging					
Bridging and mesh support	✓	✓	✓	✓	✓

Features (continued)

	WLA321	WLA322	WLA522	WLA532	WLA632
Installation and Configuration					
Mounting					
One snap invisible ceiling grid attachment	✓	✓	✓	✓	
Compatible indoor mounting brackets	adapter required	adapter required	✓	adapter required	
Outdoor pole mount brackets and swivel collar					✓
Offset Wall Mounting	✓	✓		✓	
Powering					
802.3af or 802.3at compliant PoE switch or PoE injector	✓	✓	✓	✓	
External PSU 48VDC with 8-pin (male) DIN connector					✓
RF Management					
Outage resiliency planning for RF auto-tuning using Juniper Networks RingMaster	✓	✓	✓	✓	✓
Spectrum analysis and classification of interferers	✓	✓	✓	✓	

Specifications

	WLA321	WLA322	WLA522	WLA532	WLA632
Hardware Specifications					
Dimensions	5.6 in (H) x 5.4 in (W) x 1.9 in (D)	5.6 in (H) x 5.4 in (W) x 1.9 in (D)	7.1 in (Diameter) x 2.4 in (H)	5.71 in (H) x 5.37 in (W) x 2.11 in (D)	11.18 in (H) x 11.18 in (W) x 5.53 in (D)
	(14.3 cm (H) x 13.7 cm (W) x 4.8 cm (D))	(14.3 cm (H) x 13.7 cm (W) x 4.8 cm (D))	(18 cm (Diameter) x 6.1 cm (H))	(14.5 cm (H) x 13.65 cm (W) x 5.35 cm (D))	(28.4 cm (H) x 28.4 cm (W) x 14.05 cm (D))
Weight	6.92 oz (196 g)	7.24 oz (205 g)	1.25 lb (569 g)	13.87 oz (393.2 g) WLA532E: 25.18 oz (714 g)	9.8 lb (4.44 kg)
LAN interfaces	One 10/100/1000 BASE-TX auto-sensing (RJ45) PoE port	One 10/100/1000 BASE-TX auto-sensing (RJ45) PoE port	One 10/100/1000 BASE-TX auto-sensing (RJ45) PoE port	One 10/100/1000 BASE-TX auto-sensing (RJ45) PoE port	One 10/100/1000 Ethernet port for unshielded twisted pair connectivity on ruggedized 8 pin DIN connector
Antenna interfaces			WLA522E: 4 RP-SMA ports	WLA532E: 4 RP-SMA ports	
Environmental					
Operating temperature	32° to 122° F (0° to 50° C)	32° to 122° F (0° to 50° C)	32° to 122° F (0° to 50° C)	32° to 122° F (0° to 50° C)	-40° to 131° F (-40° to 55° C)
Storage temperature	-40° to 158° F (-40° to 70° C)	-40° to 158° F (-40° to 70° C)	-40° to 158° F (-40° to 70° C)	-40° to 158° F (-40° to 70° C)	-40° to 158° F (-40° to 70° C)
Humidity	10% to 95% (non-condensing)	10% to 95% (non-condensing)	10% to 95% (non-condensing)	5% to 95% (non-condensing)	10% to 95% (non-condensing)
Status indicator LEDs	3 dual color	3 dual color	3 dual color	3 dual color	3 dual color
Power consumption at full operation	5.0 W	7.0 W	11.3 W	10 W (3x3) WLA532E: 12.95W (3x3)	30 W

Specifications (continued)

	WLA321	WLA322	WLA522	WLA532	WLA632
802.11a and 802.11a/n Radio Specifications					
5.15 GHz to 5.85 GHz operating frequency	✓	✓	✓	✓	✓
Orthogonal Frequency Division Multiplexing (OFDM)	✓	✓	✓	✓	✓
Transmit Power					
Max power (Actual output power may be limited by regulatory domain requirements)	21 dBm with 2 antennas	21 dBm with 2 antennas	21 dBm with 2 antennas	23dBm with 3 antennas WLA532E: 21dBm with 3 antennas	19 dBm with 3 antennas
Configurable Association Rates					
802.11n Modulation Coding Scheme	MCS 0 to MCS 15 (6.5 Mbps to 300Mbps)	MCS 0 to MCS 15 (6.5 Mbps to 300Mbps)	MCS 0 to MCS 15 (6.5 Mbps to 300 Mbps)	MCS 0 to MCS 23 (6.5 Mbps to 450 Mbps)	MCS 0 to MCS 15 (6.5 Mbps to 300 Mbps)
802.11a Legacy Rates: 54 Mbps, 48 Mbps, 36 Mbps, 24 Mbps, 18 Mbps, 12 Mbps, 9 Mbps and 6 Mbps with automatic rate fallback	✓	✓	✓	✓	✓
802.11g and 802.11g/n Radio Specifications					
2.4 GHz to 2.484 GHz operating frequency	✓	✓	✓	✓	✓
Orthogonal Frequency Division Multiplexing (OFDM)	✓	✓	✓	✓	✓
Transmit Power					
Max power (Actual output power may be limited by regulatory domain requirements)	21 dBm with 2 antennas	21 dBm with 2 antennas	21 dBm with 2 antennas	23 dBm with 3 antennas WLA532E: 22dBm with 3 antennas	20 dBm with 3 antennas
Configurable Association Rates					
802.11n Modulation Coding Scheme	MCS 0 to MCS 15 (6.5 Mbps to 130 Mbps)	MCS 0 to MCS 15 (6.5 Mbps to 130 Mbps)	MCS 0 to MCS 15 (6.5 Mbps to 130 Mbps)	MCS 0 to MCS 23 (6.5 Mbps to 195 Mbps)	MCS 0 to MCS 15 (6.5 Mbps to 130 Mbps)
802.11g Legacy Rates: 54 Mbps, 48 Mbps, 36 Mbps, 24 Mbps, 18 Mbps, 12 Mbps, 9 Mbps and 6 Mbps with automatic rate fallback	✓	✓	✓	✓	✓
802.11b Radio Specifications					
2.4 GHz to 2.484 GHz operating frequency	✓	✓	✓	✓	✓
Direct-Sequence-Spread-Spectrum (DSSS)	✓	✓	✓	✓	✓
Transmit Power					
Max Transmit P power (Actual output power may be limited by regulatory domain requirements)	18 dBm	18 dBm	18 dBm	18 dBm WLA532E: 17 dBm	17 dBm
Configurable Association Rates					
11 Mbps, 5.5 Mbps, 2 Mbps, and 1 Mbps with automatic fallback	✓	✓	✓	✓	✓
Radio Approvals					
Channel Availability					
Based on configured regulatory domain	✓	✓	✓	✓	✓
Radio Approvals					
USA: FCC	✓	✓	✓	✓	✓
Canada: IC	✓	✓	✓	✓	✓
EU: CEN-CENELEC	✓	✓	✓	✓	✓
Japan: MIC	✓	✓	✓	✓	✓
Others: ask representative	✓	✓	✓	✓	✓

Specifications (continued)

	WLA321	WLA322	WLA522	WLA532	WLA632
Standards Support					
IEEE					
802.3i: 10BASE-T Ethernet	✓	✓	✓	✓	✓
802.3u: 100BASE-TX Ethernet	✓	✓	✓	✓	✓
802.3ab: 1000BASE-TX Gigabit Ethernet	✓	✓	✓	✓	✓
802.3af: Power over Ethernet	✓	✓	✓	✓	
802.3at: Power over Ethernet	✓	✓	✓		
802.3az Energy Efficient Ethernet	✓	✓		✓	
802.11i	✓	✓	✓	✓	✓
802.1X Network Access Control and Mutual Authentication	✓	✓	✓	✓	✓
802.11a, 802.11b, 802.11g Wireless Ethernet	✓	✓	✓	✓	✓
802.11n	✓	✓	✓	✓	✓
802.11e quality of service (QoS) (WMM), call admission control (TSPEC), unscheduled power save delivery (U-APSD)	✓	✓	✓	✓	✓
Fast Roaming (PMK Caching), encryption (AES/CCMP and TKIP)	✓	✓	✓	✓	✓
Wi-Fi Alliance					
Wi-Fi Alliance Protected Access 1.0 (WPA) and 2.0 (WPA2)	✓	✓	✓	✓	
Wi-Fi Multimedia (WMM) & Wi-Fi Multimedia Power Save (WMM-PS)	✓	✓	✓	✓	
Wi-Fi Certified for 802.11a/b/g					
Wi-Fi Certified for 802.11a/b/g/n	✓	✓	✓	✓	
IETF					
IETF CAPWAP WG Taxonomy and Architecture compatibility	✓	✓	✓	✓	✓
Regulatory Compliance					
Safety					
USA/CAN CSA C22-2 60950-1	✓	✓	✓	✓	✓
CB Scheme IEC 60950-1	✓	✓	✓	✓	✓
IEC 60950-22		✓			✓
EU Low Voltage Directive 2006/95/EC	✓	✓	✓	✓	✓
UL-2043 Plenum Rated			✓*	✓*	
EU EMC Directive 2004/108/EC	✓	✓		✓	✓
R&TTE EU Directive 1999/5/EC	✓	✓	✓	✓	✓
Environmental					
WEEE	✓	✓	✓	✓	✓
RoHS	✓	✓	✓	✓	✓
Ingress Protection: IP 67					✓
Other					
FCC Part 15, Class B	✓	✓	✓	✓	
ICES-003, Class B	✓	✓	✓	✓	
EN 301 893	✓	✓	✓	✓	✓
EN60601-1-2: EMC Medical Standard	✓	✓	✓	✓	✓
DFS Support	✓	✓	✓	✓	✓

* The Plenum rating applies to the WLA522E and WLA532E models.

Juniper Networks Services and Support

Juniper Networks is the leader in performance-enabling services that are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to maximize operational efficiency while reducing costs and minimizing risk, achieving a faster time to value for your network. Juniper Networks ensures operational excellence by optimizing the network to maintain required levels of performance, reliability, and availability. For more details, please visit juniper.net/us/en/products-services/.

Ordering Information

Model Number	Description
--------------	-------------

WLA321 Hardware

WLA321-US	AP with single radio 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling mount bracket included. For operation in USA.
WLA321-WW	AP with single radio 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling mount bracket included. For worldwide operation except US and Israel.

WLA322 Hardware

WLA322-US	AP with dual radios 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling mount bracket included. For operation in USA.
WLA322-WW	AP with dual radios 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling mount bracket included. For worldwide operation except US and Israel.

WLA522 Hardware

WLA522-US	AP with dual radios 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling/wall mount bracket included. Required for operation in USA.
WLA522-WW	AP with dual radios 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling/wall mount bracket included. Worldwide operation except US and Israel.
WLA522-IL	AP with dual radios 802.11a/b/g/n 2x2 MIMO (2SS), single 1000BASE-T 802.3af PoE Ethernet port, 4 internal antennas. Not rated for plenum use. Ceiling/wall mount bracket included. Required for operation in Israel.
WLA522E-US	Plenum-rated AP with dual radios 802.11a/b/g/n 2x2 MIMO, single 1000BASE-T 802.3af PoE Ethernet port, 4 external antenna ports. Ceiling mount bracket included. Required for operation in USA.
WLA522E-WW	Plenum-rated AP with dual radios 802.11a/b/g/n 2x2 MIMO, single 1000BASE-T 802.3af PoE Ethernet port, 4 external antenna ports. Ceiling mount bracket included. Worldwide operation except US and Israel.
WLA522E-IL	Plenum-rated AP with dual radios 802.11a/b/g/n 2x2 MIMO, single 1000BASE-T 802.3af PoE Ethernet port, 4 external antenna ports. Ceiling mount bracket included. Required for operation in Israel.

Model Number	Description
--------------	-------------

External Antennas (WLA522E Only)

WLA-ANT5007-OUT	Outdoor two-element cross-polarized high-gain directional panel antenna for 11n 5 GHz band.
WLA-ANT7360A-OUT	360° outdoor dual-band omni-directional antenna with 6 dB (8 dB) gain in the 2.4 GHz (5 GHz) band; includes mast mounting kit and 36" Type N male to Type N male low-loss cable.
WLA-ANT74520-OUT	Indoor/outdoor dual-band three-element directional panel antenna for 11n. 10.9 dB (13.5 dB) gain in the 2.4 GHz (5 GHz) band and 45 degree (20 degree) horizontal beamwidth in the 2.4 GHz (5 GHz) band.
WLA-ANT77555-OUT	Indoor/outdoor dual-band three-element directional panel antenna for 11n, 8 dB (10.7 dB) gain in the 2.4 GHz (5 GHz) band and 75 degree (55 degree) horizontal beamwidth in the 2.4 GHz (5 Hz) band.
WLA-ANTXTEND-OUT	12" Belden 7806A cable (LMR-195) with N-female and RP-SMA plug connectors for extending WLA522E coaxial interface for use with external antennas.

WLA532 Hardware

WLA532-US	AP with dual radios 802.11a/b/g/n 3x3 MIMO (3SS), single 1000BASE-T 802.3af PoE Ethernet port, 6 internal antennas. Not rated for plenum use. Ceiling mount bracket included. For operation only in USA.
WLA532-WW	AP with dual radios 802.11a/b/g/n 3x3 MIMO (3SS), single 1000BASE-T 802.3af PoE Ethernet port, 6 internal antennas. Not rated for plenum use. Ceiling mount bracket included. For worldwide operation except US and Israel.
WLA532-IL	AP with dual radios 802.11a/b/g/n 3x3 MIMO (3SS), single 1000BASE-T 802.3af PoE Ethernet port, 6 internal antennas. Not rated for plenum use. Ceiling mount bracket included. Required for operation in Israel.

WLA532E Hardware

WLA532E-US	AP with dual radios 802.11a/b/g/n 3x3 MIMO (3SS), single 1000BASE-T 802.3af PoE Ethernet port, 3 RP-SMA external antenna ports. Plenum rated. Ceiling mount bracket included. For operation only in USA.
WLA532E-WW	AP with dual radios 802.11a/b/g/n 3x3 MIMO (3SS), single 1000BASE-T 802.3af PoE Ethernet port, 3 RP-SMA external antenna ports. Plenum rated. Ceiling mount bracket included. For worldwide operation except US and Israel.

External Antennas (WLA532E Only)

WLA-ANT7360A-OUT	360° outdoor dual-band omni-directional antenna with 6 dB (8 dB) gain in the 2.4 GHz (5 GHz) band; includes mast mounting kit and 36" Type N male to Type N male low-loss cable.
WLA-ANT77555-OUT	Indoor/outdoor dual-band three-element directional panel antenna for 11n, 8 dB (10.7 dB) gain in the 2.4 GHz (5 GHz) band and 75 degree (55 degree) horizontal beamwidth in the 2.4 GHz (5 Hz) band.
WLA-ANT7360P-IN	360 degree outdoor dual-band 802.11n omni-directional plenum rated paddle antenna, 2 (3dB) gain for 2.4GHz (5GHz) band

Ordering Information (continued)

Model Number	Description
WLA632 Hardware	
WLA632-US	Outdoor AP, dual radios 802.11a/b/g/n 3x3 MIMO (2SS), single 1000BASE-T PoE Ethernet port, external female Type N connectors. Outdoor power supply included. Required for operation in USA.
WLA632-WW	Outdoor AP, dual radios 802.11a/b/g/n 3x3 MIMO (2SS), single 1000BASE-T PoE Ethernet port, external female Type N connectors. Outdoor power supply included. Worldwide operation except US and Israel.
WLA632-IL	Outdoor AP, dual radios 802.11a/b/g/n 3x3 MIMO (2SS), single 1000BASE-T PoE Ethernet port, external female Type N connectors. Outdoor power supply included. 5 GHz operation not supported per regulation. Required for operation in Israel.

WLA632 Power Accessories

WLA-XPS9001GO-INTL	Outdoor 802.3at compliant Gigabit PoE midspan power supply with International power cord. 100-240 VAC 50-60Hz input. Ships with mounting bracket. For World-wide operation except countries following North America Safety Standards.
WLA-XPS9001GO-NA	Outdoor 802.3at compliant Gigabit PoE midspan power supply with North American connector. 100-240 VAC 50-60Hz input. Ships with mounting bracket. For operation in countries following North America Safety Standards.

WLA632 External Antennas

WLA-ANT5007-OUT	Outdoor two-element cross-polarized high-gain directional panel antenna for 11n 5 GHz band.
WLA-ANT7360A-OUT	360° outdoor dual-band omni-directional antenna for 11n. 6 dB (8 dB) gain in the 2.4 GHz (5 GHz) band; includes mast mounting kit and one 36" Type N male to Type N male low-loss cable.
WLA-ANT74520-OUT	Indoor/outdoor dual-band three-element directional panel antenna for 11n. 10.9 dB (13.5 dB) gain in the 2.4 GHz (5 GHz) band and 45 degree (20 degree) horizontal beamwidth in the 2.4 GHz (5 GHz) band.
WLA-ANT77555-OUT	Indoor/outdoor dual-band three-element directional panel antenna for 11n. 8 dB (10.7 dB) gain in the 2.4 GHz (5 GHz) band and 75 degree (55 degree) horizontal beamwidth in the 2.4 GHz (5 GHz) band.
WLA-ANTCBL3MM-OUT	3m M/M ULA400 cable with Type N connectors for extension of outdoor antennas.
WLA-ANTPROT-OUT	N-male to N-female lightning protector for direct mount.
WLA-ANTLGTNG-OUT	Lightning arrestor kit for outdoor antenna installations. Includes F/F Type N Bulkhead with 0-6 GHz range, 3m M/M Type N ULA400 low loss cable, and grounding attachment.

Model Number	Description
Mounting Brackets	
WLA-BRKT-ATST	Anti-tamper security screws and appropriate proprietary tool. Package includes 100 screws and 1 tool. For use with WLA532-US, WLA532-WW, WLA532-IL, WLA322-US, WLA322-WW, WLA321-US, and WLA321-WW.
WLA-BRKT-CLNG	Spare recessed ceiling tile rail adapter. Support for ceiling rail types (15/16 inch and 9/16 inch). Tool-less mounting. Optionally accepts –ATST security screws. Package includes 8 units. For use with WLA532-US, WLA532-WW, WLA532-IL, WLA322-US, WLA322-WW, WLA321-US, and WLA321-WW.
WLA-BRKT-WALL	Wall-mount adapter extends AP 1.5 inches from wall for Ethernet cable bend radius. Optionally accepts –ATST security screws. Package includes 8 units. For use with WLA532-US, WLA532-WW, WLA532-IL, WLA322-US, WLA322-WW, WLA321-US, and WLA321-WW.
WLA-GNGWLBX-ADP-EU	Europe single gang wall box adapter (minimum extension from wall, covers wall box and cables, Torx or other semi-secure fastener option). Optionally accepts –ATST security screws. Package includes 8 units. For use with WLA532-US, WLA532-WW, WLA532-IL, WLA322-US, WLA322-WW, WLA321-US, and WLA321-WW.
WLA-GNGWLBX-ADP-NA	North America single gang wall box adapter (minimum extension from wall, covers wall box and cables, Torx or other semi-secure fastener option). Optionally accepts –ATST security screws. Package includes 8 units. For use with WLA532-US, WLA532-WW, WLA532-IL, WLA322-US, WLA322-WW, WLA321-US, and WLA321-WW.
WLA-BRKT-PLNM	Plenum mount adapter for mounting AP onto bracket inside the plenum space. Package includes 1 unit. For use with WLA532E-US, WLA532E-WW, WLA532E-IL. Package includes 1 unit.
WLA-BRKT-TRPZADP	Trapeze legacy mounting bracket adapter. Package includes 1 unit.
Spectrum Analysis Feature License	
WLC-SPECTRUM-U1	Spectrum Analysis Module License for 1 AP. Requires software version 7.5 or later.
WLC-SPECTRUM-U4	Spectrum Analysis Module License for 4 APs. Requires software version 7.5 or later.
WLC-SPECTRUM-U16	Spectrum Analysis Module License for 16 APs. Requires software version 7.5 or later.
WLC-SPECTRUM-U32	Spectrum Analysis Module License for 32 APs. Requires software version 7.5 or later.
Access Point Mesh/Bridging Licenses	
WLC-MESH-U4	Mesh Module license for 4 APs. Requires software version 7.1 or later.
WLC-MESH-U12	Mesh Module license for 12 APs. Requires software version 7.1 or later.
WLC-MESH-U32	Mesh Module license for 32 APs. Requires software version 7.1 or later.

About Juniper Networks

Juniper Networks is in the business of network innovation. From devices to data centers, from consumers to cloud providers, Juniper Networks delivers the software, silicon and systems that transform the experience and economics of networking. The company serves customers and partners worldwide. Additional information can be found at juniper.net.

Corporate and Sales Headquarters

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
Phone: 888.JUNIPER (888.586.4737)
or 408.745.2000
Fax: 408.745.2100
juniper.net

APAC Headquarters

Juniper Networks (Hong Kong)
26/F, Cityplaza One
1111 King's Road
Taikoo Shing, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

EMEA Headquarters

Juniper Networks Ireland
Airside Business Park
Swords, County Dublin, Ireland
Phone: 35.31.8903.600
EMEA Sales: 00800.4586.4737
Fax: 35.31.8903.601

To purchase Juniper Networks solutions, please contact your Juniper Networks representative at 1-866-298-6428 or authorized reseller.

Copyright 2012 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, Junos, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.