



Product Overview

The Juniper Networks AX411 is a high-performance, 802.11a/b/g/n wireless LAN (WLAN) access point. It is a dual band, dual radio solution that supports data rates up to 300 Mbps. The AX411 integrates with the award winning Juniper Networks SRX Series Services Gateways for the branch to deliver security throughput that leads in its category. The AX411 is fully managed by branch SRX Series devices using Juniper Networks Junos OS. The AX411 is an ideal wireless networking solution for branch offices with simple WLAN architectures.

Product Description

The Juniper Networks® AX411 Wireless Access Point, together with Juniper Networks SRX Series Services Gateways for the branch, extends the reach of Juniper Networks Junos® operating system to lower deployment and operational costs across wired and wireless environments. Using cluster cloning, operators can ease management tasks by automating the configuration of any AX411 joining a cluster of access points. The product's over-the-air packet capture capabilities support centralized monitoring that allows offsite experts to analyze traffic and resolve problems.

For locations with multiple access points, the branch SRX Series provides wireless controller capabilities. All branch SRX Series Services Gateways can manage up to two AX411 access points without the need to purchase additional software licenses. Additional access points can be managed with the purchase of a software licenses. The AX411 supports 802.3af Power over Ethernet (PoE) for cost-effective installations based on industry standard technologies.

By combining the SRX Series Services Gateways with the AX411 WLAN access point, designers can extend security and QoS architectures from wired networks to wireless networks. As a result, the overall infrastructure solution is consistent and secure. The AX411 can support a variety of user and device types with multiple unique SSIDs, each with specific security and QoS requirements.

The AX411 integrates with Juniper's integrated convergence services capabilities on branch SRX Series devices to extend enterprise voice over IP to untethered workers who are using Wi-Fi-enabled endpoints

AX411 configuration options include a command-line interface (CLI) and Juniper Networks J-Web Software on the SRX Series, in addition to centralized policy and device management from Juniper Networks Network and Security Manager.



Features and Benefits

- Easy to install and expand
 - Automatic access point cluster cloning*
 - Configuration on connect
- Ease to operate and manage
 - Remote packet capture*
 - Wireless PHY security integrated with Juniper zone-based security
- Excellent end user experience and security
 - End-to-end wireless QoS treatment for simplified low latency application support
 - Multiple SSID support for different security and application needs
- Juniper Networks SRX Series Services Gateways for the branch can manage up to four AX411 access points

* Features supported in the future



AX411 WIRELESS LAN ACCESS Point

Specifications

Draft 802.11n 2.0 Capabilities

- 2x3 multiple-input multiple-output (MIMO) with two spatial streams
- Maximal-ratio combining (MRC)
- 20 MHz and 40 MHz channels
- PHY data rates up to 300 Mbps
- Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx)
- Space-time block code (STBC) range enhancement support
- Reduced active power consumption (< 2.5 W per radio)

Data Rates

- 802.11a: 6, 9, 12, 18, 24, 36, 48, and 54 Mbps
- 802.11g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, and 54 Mbps
- 802.11n:
 - 6.5, 13.5, 7.2, 15 Mbps
 - 13, 27, 14.4, 30 Mbps
 - 19.5, 40.5, 21.7, 45 Mbps
 - 26, 54, 28.9, 60 Mbps
 - 39, 81, 43.3, 90 Mbps
 - 52, 108, 57.8, 120 Mbps
 - 58.5, 121.5, 65, 135 Mbps
 - 65, 135, 72.2, 150 Mbps
 - 13, 27, 14.4, 30 Mbps
 - 26, 54, 28.9, 60 Mbps
 - 39, 81, 43.3, 90 Mbps
 - 52, 108, 57.8, 120 Mbps

- 78, 162, 86.7, 180 Mbps
- 104, 216, 115.6, 240 Mbps
- 117, 243, 130, 270 Mbps
- 130, 270, 144.4, 300 Mbps

Antenna Connector

- 3 x reverse polarity SMA (RPSMA)

Tx Power Capabilities

- TX power out B mode @ 11 Mbps: 20 dBm +/- 2
- TX power out G mode @ 54 Mbps: 18 dBm +/- 2
- TX power 11n mode @ 2.4 GHz (per chain): 16 dBm +/- 2
- TX power out A mode @ 54 Mbps: 14 dBm +/- 2
- TX power 11n mode @ 5 GHz (per chain): 13 dBm +/- 2

RX Power Capabilities

RX sensitivity (8% PER) 11b mode @ different data rates	1 Mbps: -96 dBm 2 Mbps: -93 dBm 5.5 Mbps: -91dBm 11 Mbps: -88 dBm
---	--

RX sensitivity (10% PER) 11g mode @ different data rates	6 Mbps: -90 dBm, 9 Mbps: -89 dBm 12 Mbps: -89 dBm, 18 Mbps: -86 dBm 24 Mbps: -83 dBm, 36 Mbps: -79 dBm 48 Mbps: -75 dBm, 54 Mbps: -74 dBm
--	--

Note that these numbers are without using external low-noise amplifier (LNA). With external LNA, the Rx sensitivity numbers improve by 1 to 2 dBm.

RX sensitivity (10% PER) 11n modes	Band	Rate/BW	Sensitivity (dBm)
	2.4 GHz	1	-96
	2.4 GHz	11	-88
	2.4 GHz	6	-90
	2.4 GHz	54	-74
	2.4 GHz	mo/20 MHz	-86
	2.4 GHz	mo/40 MHz	-83
	2.4 GHz	m15/20 MHz	-67
	2.4 GHz	m15/40 MHz	-66
	5 GHz	6	-89
	5 GHz	54	-73
	5 GHz	mo/20 MHz	-85
	5 GHz	mo/40 MHz	-82
	5 GHz	m15/20 MHz	-64

Antenna specification	Frequency range: 2.4-2.5 GHz/5.15-5.875 GHz Gain: 2.4-2.5 GHz, Gain = 3 dBi 5.15-5.875 GHz, Gain = 5 dBi VSWR: VSWR < 2 Polarization: linear, vertical Half-power beam width (HPBW)/horizontal: 360° HPBW/vertical: 78° Maximum power rating: 2 W (CW) Impedance: 50 ohms (typical)
-----------------------	--

Interfaces

- 10/100/1000 Ethernet port
- Serial console port
- Optional power supply
- Locking connector

Management

- Junos OS CLI, J-Web
- Network and Security Manager

Indicators

- Power LED: Indicating power status of AX411
- Status LED: Indicating AX411 operational status
- Radio 1 LED: Indicating activity on 2.4 GHz radio
- Radio 2 LED: Indicating activity on 5 GHz radio

Dimensions

- 9.5 x 5.8 x 1.9 in (242 x 147 x 48 mm)

Weight

- 2 lb 6.3 oz (1.085 kg)

Mounting

- Wall mount
- Desk mount
- Ceiling tile

Environmental

- Nonoperating (storage) temperature: -40° to 149° F (-40° to 65° C)
- Operating temperature: -4° to $+122^{\circ}$ F (-20° to 50° C)
- Operating humidity: Up to 95% @ 25° C
- Mean time between failures (Telcordia model): > 30 years

System Memory

- 2 MB NOR Flash
- 32 MB NAND Flash
- 64 MB DDRII RAM

Power Options

- Power supply and power injector: 100 to 240 VAC; 50 to 60 Hz
- PoE: 802.3af


Power Draw

- 12.4 W

Compliance


- EMC: FCC 15B, 15C, 15E, Canada RSS-210, EN300328, EN301893, EN301489-1, EN55022:2007, EN 55024, EN300386
- Safety: UL2043, CAN/CSA-C22.2 No. 60950-1 (2007), UL 60950-1, EN 60950-1, IEC 60950-1
- Radio Approvals: For a list of supported countries, refer to the AX411 Certification Listing Document
- IEEE Standard: IEEE 802.11a/b/g, IEEE 802.11n draft 2.0, IEEE 802.11h, IEEE 802.11d, IEEE 802.11e
- Security: 802.11i, WEP, WPA/WPA2, 802.1X, Advanced Encryption Standard (AES), Temporal Key Integrity Protocol (TKIP)

Antenna pattern 2.4 GHz - vertical

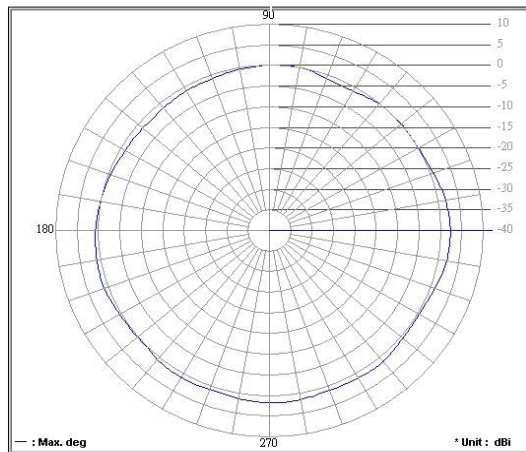


Frequency (MHz): **2400.00** Antenna Polarity: **Vertical** Average Gain (dB): **0.58**
Maximum Gain (dB): **2.35** Maximum Gain (degree): **360**
Minimum Gain (dB): **-1.43** Minimum Gain (degree): **135**

Antenna pattern 5 GHz - vertical

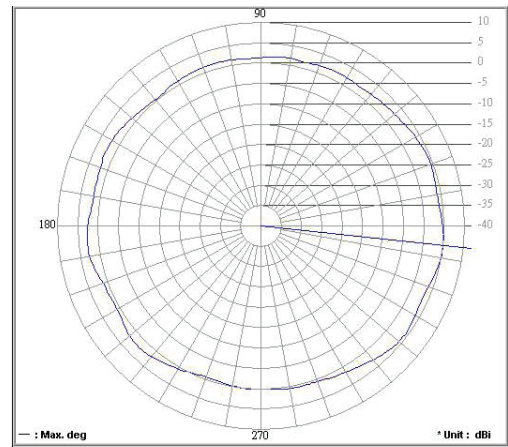


Frequency (MHz): **5150.00** Antenna Polarity: **Vertical** Average Gain (dB): **2.29**
Maximum Gain (dB): **5.02** Maximum Gain (degree): **354**
Minimum Gain (dB): **-0.59** Minimum Gain (degree): **252**

Antenna pattern 2.4 GHz - horizontal

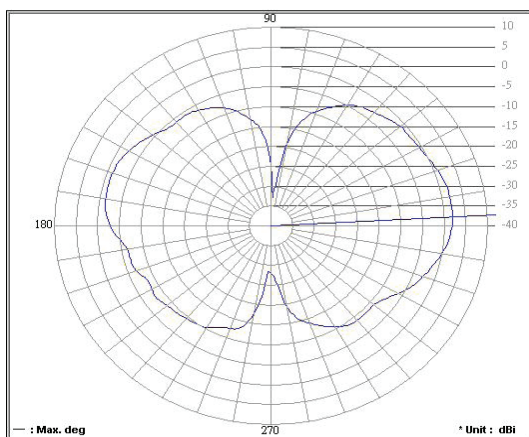

Frequency (MHz): **2400.00** Antenna Polarity: **Horizontal** Average Gain (dB): **-4.15**
Maximum Gain (dB): **2.05** Maximum Gain (degree): **3**
Minimum Gain (dB): **-32.82** Minimum Gain (degree): **87**

Antenna pattern 5 GHz - Horizontal

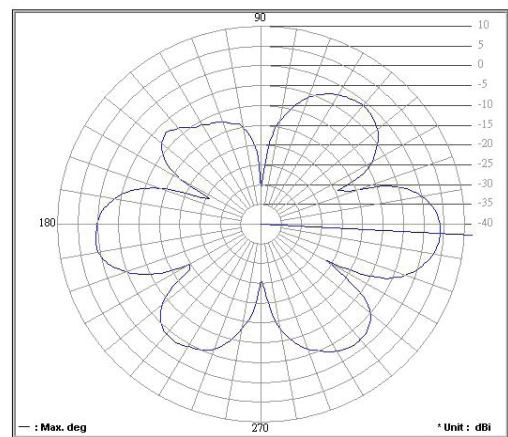

Frequency (MHz): **5150.00** Antenna Polarity: **Horizontal** Average Gain (dB): **-3.81**
Maximum Gain (dB): **4.41** Maximum Gain (degree): **357**
Minimum Gain (dB): **-31.34** Minimum Gain (degree): **90**

Specifications (continued)

EAP Types

- EAP-TLS
- EAP-TTLS/MSCHAPv2
- PEAPv0/EAP-MSCHAPv2
- PEAPv1/EAP-GTC
- EAP-SIM

Juniper Networks Services and Support

Juniper Networks is the leader in performance-enabling services that are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to maximize operational efficiency while reducing costs and minimizing risk, achieving a faster time to value for your network. Juniper Networks ensures operational excellence by optimizing the network to maintain required levels of performance, reliability, and availability. For more details, please visit www.juniper.net/us/en/products-services.

Ordering Information

Model Number	Description
AX411 Wireless LAN Access Point	
AX411-MNT	Wall/ceiling mount bracket for AX411
AX411-MNT2	Ceiling (t-bar) mounting bracket for AX411
AX411-SPARE-XXX ¹	AX411 accessory power supply and power cord
AX411-XXX ²	Dual radio, 802.11 a/b/g/n PoE powered access point (does not include power supply)
Branch SRX Series (SRX100, SRX110, SRX200, SRX220, and SRX650) AX411 Software Licenses	
AX411-2	License support for management of up to 2 AX411 access points in a L2 Cluster ³

¹See price list for country-specific power cord model numbers.

²See price list for country-specific AX411 SKUs.

³All branch SRX Series products ship with a license to manage two AX411 APs by default. SRX100 and SRX110 can manage up to two AX411 APs. All other branch SRX Series products can manage up to four AX411 APs.

About Juniper Networks

Juniper Networks is in the business of network innovation. From devices to data centers, from consumers to cloud providers, Juniper Networks delivers the software, silicon and systems that transform the experience and economics of networking. The company serves customers and partners worldwide. Additional information can be found at www.juniper.net.

Corporate and Sales Headquarters

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
Phone: 888.JUNIPER (888.586.4737)
or 408.745.2000
Fax: 408.745.2100
www.juniper.net

APAC Headquarters

Juniper Networks (Hong Kong)
26/F, Cityplaza One
1111 King's Road
Taikoo Shing, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

EMEA Headquarters

Juniper Networks Ireland
Airside Business Park
Swords, County Dublin, Ireland
Phone: 35.31.8903.600
EMEA Sales: 00800.4586.4737
Fax: 35.31.8903.601

To purchase Juniper Networks solutions, please contact your Juniper Networks representative at 1-866-298-6428 or authorized reseller.

Copyright 2012 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, Junos, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.