


Juniper Networks NetScreen-5GT Series

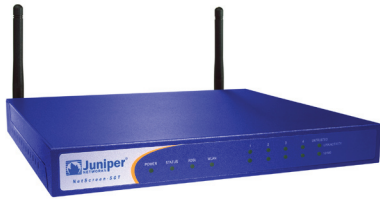

The Juniper Networks NetScreen-5GT Series is a family of three feature-rich, enterprise-class network security solutions. They are ideally suited for securing remote offices, retail outlets and broadband telecommuter environments, where IT staff support is minimal and ease of configuration and management is crucial.

The NetScreen-5GT Series integrates Unified Threat Management (UTM) security applications, routing protocols and resiliency features to provide IT managers a cost effective appliance that is easy to deploy and manage. All NetScreen-5GT Series offerings described below come standard with the following features:

- **Security:** Proven Stateful firewall and IPSec VPN combined with a complete set of best-in-class UTM security features including IPS, Antivirus (includes Anti-Spyware, Anti-Adware, Anti-Phishing), Anti-Spam, and Web Filtering allow the NetScreen-5GT to defend the network against worms, Spyware, Trojans, malware and other emerging attacks.
- **Network integration:** Support for key routing protocols, such as BGP, OSPF, RIPv1/2 and ECMP along with NAT, Route and Transparent Layer 2 operation helps facilitate network integration.
- **Resiliency:** Dial-backup or dual Ethernet ports, along with route-based VPNs provide redundancy when network connectivity is business critical. Dual WAN ports can also be used to share traffic load.
- **Port Flexibility:** Almost every network deployment scenario can be accommodated without a hardware upgrade through five configurable Ethernet interfaces. Administrators can enable switching, dual WAN ports, a dedicated DMZ or any combination thereof through a set of six predefined interface layouts called Port Modes.

Juniper Networks NetScreen-5GT Ethernet

Juniper Networks NetScreen-5GT Ethernet solution is ideal for environments that need hardwired connectivity backed by robust network, application and payload level security. The NetScreen-5GT Ethernet is available with five Ethernet interfaces that can be deployed in a wide variety of configurations.

Juniper Networks NetScreen-5GT ADSL

The Juniper Networks NetScreen-5GT ADSL adds ADSL connectivity to existing Ethernet connectivity, eliminating the need for an external ADSL modem. It provides a cost effective security and ADSL routing platform, with the same key security applications, routing protocols and resiliency features found in the Ethernet-based platforms, to help ensure network resources are not compromised.

Juniper Networks NetScreen-5GT Wireless

The Juniper Networks NetScreen-5GT with Wireless brings enterprise-level security applications, routing protocols and resiliency features to help organizations deploy 802.11b/g networks in a secure manner. The NetScreen-5GT Wireless offers administrators up to four configurable Wireless Security Zones (patent-pending), each with a unique SSID that can be used to provision appropriate levels of security for different types of users. To help ensure wireless security, privacy and interoperability, the NetScreen-5GT Wireless supports a broad set of wireless authentication and privacy mechanisms. The NetScreen-5GT Wireless includes standard Ethernet connectivity with ADSL as a hardware option.

	5GT 10 user or plus	5GT ADSL 10 user or plus	5GT Wireless 10 user or plus
ScreenOS version support	ScreenOS 5.4		
Firewall performance ⁽¹⁾	75 Mbps		
3DES + SHA-1 VPN performance	20 Mbps		
Concurrent sessions	2000		
New sessions/second	2000		
Policies	100		
Interfaces	5 10/100 Base-T, 1 Modem, and 1 Console	5 10/100 Base-T + ADSL, 1 Modem, and 1 Console	5 10/100 ports, 1 Wireless port with up to 4 SSIDs, 1 Modem, and 1 Console, 1 ADSL port (optional),
Mode of Operation	5GT 10 user or plus	5GT ADSL 10 user or plus	5GT Wireless 10 user or plus
Layer 2 mode (transparent mode) ⁽²⁾	Yes	Yes	Yes (except with ADSL)
Layer 3 mode (route and/or NAT mode)	Yes	Yes	Yes
NAT (Network Address Translation)	Yes	Yes	Yes
PAT (Port Address Translation)	Yes	Yes	Yes
Configurable port modes	Yes	Yes	Yes
Dual Untrust	Yes	Yes	Yes
Dial back up	Yes	Yes	Yes
Policy-based NAT	Yes	Yes	Yes
Mapped IP	300	300	300
Virtual IP	4	4	4
MIP/VIP Grouping	Yes	Yes	Yes
Users supported	10 or Unrestricted		
IPSec passthru in NAT mode	Yes	Yes	Yes

Firewall	5GT 10 user or plus	5GT ADSL 10 user or plus	5GT Wireless 10 user or plus
Number of network attacks detected	31	31	31
Network attack detection	Yes	Yes	Yes
DoS and DDoS protections	Yes	Yes	Yes
TCP reassembly for fragmented packet protection	Yes	Yes	Yes
Malformed packet protections	Yes	Yes	Yes
Malicious Web filtering	Up to 48 URLs		
Brute force attack mitigation	Yes	Yes	Yes
Syn cookie protection	Yes	Yes	Yes
Zone-based IP spoofing	Yes	Yes	Yes
VPN			
Concurrent VPN tunnels	Up to 10		
Tunnel interfaces	Up to 10		
DES (56 bit), 3DES (168-bit) and AES encryption	Yes	Yes	Yes
MD-5 and SHA-1 authentication	Yes	Yes	Yes
Manual Key, IKE, PKI (X.509)	Yes	Yes	Yes
Perfect forward secrecy (DH Groups)	1, 2, 5	1, 2, 5	1, 2, 5
Prevent replay attack	Yes	Yes	Yes
Remote access VPN	Yes	Yes	Yes
L2TP within IPSec	Yes	Yes	Yes
Dead Peer Detection	Yes	Yes	Yes
IPSec NAT traversal	Yes	Yes	Yes
Redundant VPN gateways	Yes	Yes	Yes
VPN tunnel monitor	Yes	Yes	Yes
Unified Threat Management / Content Security			
IPS (Deep Inspection FW)	Yes	Yes	Yes
Protocol anomaly detection	Yes	Yes	Yes
Stateful protocol signatures	Yes	Yes	Yes
Antivirus ⁽⁵⁾	Yes	Yes	Yes
Signature database	100,000 +		
Maximum AV Users ⁽⁴⁾	POP3, SMTP, HTTP, IMAP, FTP		
Anti-Phishing	Yes	Yes	Yes
Anti-Spyware	Yes	Yes	Yes
Anti-Adware	Yes	Yes	Yes
Anti-Keylogger	Yes	Yes	Yes
Anti-Spam ⁽⁴⁾	Yes	Yes	Yes
Integrated URL filtering ⁽⁵⁾	Yes	Yes	Yes
External URL filtering ⁽⁶⁾	Yes	Yes	Yes
Firewall and VPN User Authentication			
Built-in (internal) database - user limit	up to 100	up to 100	up to 100
3rd Party user authentication	RADIUS, RSA, SecurID, 802.1x and LDAP		
XAUTH VPN authentication	Yes	Yes	Yes
Web-based authentication	Yes	Yes	Yes
IPS			
Deep Inspection (DI) firewall ⁽²⁾	Yes	Yes	Yes
Protocol anomaly detection	Yes	Yes	Yes
Stateful protocol signatures	Yes	Yes	Yes

Logging/Monitoring	5GT 10 user or plus	5GT ADSL 10 user or plus	5GT Wireless 10 user or plus
Syslog (multiple servers)	External, up to 4 servers		
E-mail (2 addresses)	Yes	Yes	Yes
NetIQ WebTrends	External	External	External
SNMP (v1, v2)	Yes	Yes	Yes
Standard and custom MIB	Yes	Yes	Yes
Traceroute	Yes	Yes	Yes
At session start and end	Yes	Yes	Yes
Virtualization			
Virtual routers (VRs)	3	3	3
802.1Q Vlan Tagging	Yes	Yes	Yes
Routing			
OSPF/BGP/RIPv1/v2 dynamic routing	3 instances each		
Static routes	1024	1024	1024
Source Based Routing, Source Interface Based Routing	Yes	Yes	Yes
Equal cost multi-path routing	Yes	Yes	Yes
IGMP groups	2400	2400	2400
High Availability (HA)			
HA Lite	Yes - with Extended License Key		
Dial Backup ⁽⁶⁾	Yes	Yes	Yes
Dual Untrust	Yes	Yes	Yes
VoIP			
H.323 ALG	Yes	Yes	Yes
SIP ALG	Yes	Yes	Yes
SCCP ALG	Yes	Yes	Yes
MGCP ALG	Yes	Yes	Yes
NAT for H.323/SIP	Yes/Yes	Yes/Yes	Yes/Yes
IP Address Assignment			
Static	Yes	Yes	Yes
DHCP/PPPoE/PPPOA client	Yes/Yes/No	Yes/Yes/Yes	Yes/Yes/Yes (w/ADSL)
Internal DHCP server	Yes	Yes	Yes
DHCP relay	Yes	Yes	Yes
PKI Support			
PKI certificate requests (PKCS 7 and PKCS 10)	Yes	Yes	Yes
Automated certificate enrollment (SCEP)	Yes	Yes	Yes
Online Certificate Status Protocol (OCSP)	Yes	Yes	Yes
Self Signed Certificates	Yes	Yes	Yes
Certificate Authorities Supported	Verisign, Entrust, Microsoft, RSA Keon, iPlanet (Netscape), DOD PKI, Baltimore		
RADIUS Accounting			
RADIUS Start/Stop	Yes	Yes	Yes
System Management			
WebUI (HTTP and HTTPS)	Yes	Yes	Yes
Command Line Interface (console)	Yes	Yes	Yes
Command Line Interface (telnet)	Yes	Yes	Yes
Command Line Interface (SSH)	Yes, v1.5 and v2.0 compatible		
NetScreen-Security Manager	Yes	Yes	Yes
All management via VPN tunnel on any interface	Yes	Yes	Yes
Rapid deployment	Yes	Yes	Yes

Administration	5GT 10 user or plus	5GT ADSL 10 user or plus	5GT Wireless 10 user or plus
Local administrators database size	20	20	20
External administrator database	RADIUS/LDAP/SecurID		
Root Admin, Admin, and Read Only use	Yes	Yes	Yes
Software upgrades	TFTP/WebUI/SCP/NSM		
Configuration Roll-back	Yes	Yes	Yes
Traffic Management			
Guaranteed bandwidth	Yes	Yes	Yes
Maximum bandwidth	Yes	Yes	Yes
Ingress Traffic Policing	Yes	Yes	Yes
Priority-bandwidth utilization	Yes	Yes	Yes
DiffServ stamp	Yes	Yes	Yes
ADSL Support			
ADSL over POTS	N/A	Yes	Yes (optional)
ADSL over ISDN	N/A	Yes	Yes (optional)
ADSL DMT issue 2	N/A	Yes	Yes (optional)
ADSL G lite Yes No	N/A	Yes	Yes (optional)
Dying Gasp Support	N/A	Yes	Yes (optional)
Deutsche Telecom Support	N/A	Yes	Yes (optional)
ADSL Layer 2 and encapsulations			
PPPoE/PPPoA	N/A	Yes	Yes (optional)
2684/1483 (Bridge and Routed Mode)	N/A	Yes	Yes (optional)
ATM AAL5/ATM PVCs	N/A	Yes/10	Yes/10 (optional)
Wireless Radio			
Transmit Power	N/A	N/A	Up to 200 mW
Wireless Standards supported	N/A	N/A	802.11b/g
Access Point Survey	N/A	N/A	Yes
Maximum Configured SSIDs	N/A	N/A	8
Maximum Active SSIDs	N/A	N/A	4
Wireless Security			
Wireless Privacy	N/A	N/A	WPA (AES or TKIP), IPsec VPN, WEP
Wireless Authentication	N/A	N/A	PSK, EAP-PEAP, EAP-TLS, EAP-TTLS over 802.1x
Additional Dial-up VPN Tunnels	N/A	N/A	20 for 10-user and Plus, 40 for Extended
MAC Access Controls	N/A	N/A	Permit or Deny
Client Isolation	N/A	N/A	Yes
Antennae options			
Diversity Antenna	N/A	N/A	Included
Directional Antenna	N/A	N/A	Optional
Omni-directional Antenna	N/A	N/A	Optional

Dimensions and Power	5GT 10 user or plus	5GT ADSL 10 user or plus	5GT Wireless 10 user or plus
Dimensions (W x H x D)	8.3 x 1 x 5 in	8.3 x 1 x 7.3 in	8.3 x 1 x 7.3 in
Power Supply (DC)	No	No	No
Weight	1.5 lbs	2 lbs.	2.5 lbs.
Rack mountable	Yes, w/separate kit		
Power Supply (AC)	9-12VDC 12W	12VDC 18W	
Environment			
Operational temperature	32° to 104° F, (-0° to 40° C)		
Non-operational temperature:	-4° to 158° F, (-20° to 70° C)		
Humidity	10 to 90% noncondensing		
MTBF (Telecordia standard)	32.2 Years	26.7 Years	23.9 Years
Certifications			
Safety Certifications	UL, CUL, CB, TUV		
EMC Certifications	FCC class B, CE class B, C-Tick, VCCI class B		
Common Criteria EAL4 Certification	Yes	No	No
FIPS 140-2, Level 2 Certification	Yes	No	No
ICSA Firewall and VPN	Yes	Yes	Yes
Wi-Fi Alliance 802.11 Certification	No	No	Yes
Wi-Fi Alliance Enterprise Certification	No	No	Yes

- (1) Performance, capacity and features listed are based upon systems running ScreenOS 5.4 and are the measured maximums under ideal testing conditions unless otherwise noted. Actual results may vary based on ScreenOS release and by deployment.
- (2) NAT, PAT, policy based NAT, virtual IP, mapped IP, virtual systems, virtual routers, VLANs, OSPF, BGP, RIPv2, Active/Active HA, and IP address assignment are not available in layer 2 transparent mode.
- (3) Supported via Kaspersky Lab Antivirus engine
- (4) Supported via Symantec Brightmail
- (5) Supported via SurfControl
- (6) Supported via SurfControl and Websense

License Options

The NetScreen-5GT Series is available in licensing options to support different numbers of users.

Licensing Options	Description
10 user Product license	Limits capacity to 10 concurrent users
Plus Product license	Increases capacity to an unlimited number of users
Extended Product license	Increases sessions and VPN tunnel capacities to 4000 and 25 respectively. Adds a DMZ zone and HA lite (no session synchronization)

Port Modes

Port Modes provide configuration flexibility to the interface options on each of the NetScreen-5GT Series platforms. The tables below depict the different Port Mode and Tunnel zone options. A tunnel zone is an extra zone for terminating tunnel interfaces.

NetScreen-5GT Ethernet Port Mode Options

Interfaces 5 10/100 ports, 1 Modem and 1 Console, Current ScreenOS version 5.1

Port Mode	Availability	Trusted Wired Security Zones	Tunnel Zones
Trust-Untrust	All Licenses	1	1
Dual-Untrust	All Licenses	1	1
Home-Work	All Licenses	2*	1
TrustUntrustDMZ	Extended Only	2	1
DMZDual Untrust	Extended Only	2	1
Combined	All Licenses	2*	1
Dual-Untrust-DMZ	Extended Only	2	1
Dual-DMZ	Extended Only	2	1

* Home Zone Cannot Access Work Zone in Home-Work and Combined Port Modes.

NetScreen-5GT ADSL and NetScreen-5GT Wireless/ADSL Port Mode Options

Interfaces 5 10/100 ports, 1 ADSL port 1 Modem and 1 Console, Current ScreenOS version 5.3

	Availability	Trusted Wired and Wireless** Zones	Tunnel Zones	Additional Wireless Security Zones**
Trust-Untrust	All Licenses	1	1	1
Home-Work	All Licenses	2*	1	1
Extended	Extended Only	2	1	2

*Home Zone Cannot Access Work Zone in Home-Work and Combined Port Modes.

** Wireless security product only

NetScreen-5GT Wireless Port Mode Options

5 10/100 ports, 1 Wireless radio, 1 Modem, and 1 Console, 1 ADSL port (optional), Current ScreenOS version 5.3

	Availability	Trusted Wired and Wireless** Zones	Tunnel Zones	Additional Wireless Security Zones**
Trust-Untrust	All Licenses	1	1	1
Dual-Untrust**	All Licenses	1	1	1
Home-Work	All Licenses	2*	1	1
Combined**	All Licenses	2*	1	1
Extended	Extended Only	2	1	2

*Home Zone Cannot Access Work Zone in Home-Work and Combined Port Modes.

** These Port modes are not available in the ADSL version of the NetScreen-5GT ADSL

Product	Part Number
Juniper Networks-5GT Ethernet	
Juniper Networks NetScreen-5GT 10 User	
NetScreen-5GT US power supply	NS-5GT-001
NetScreen-5GT UK power supply	NS-5GT-003
NetScreen-5GT Europe power supply	NS-5GT-005
NetScreen-5GT Japan power supply	NS-5GT-007-nn
NetScreen-5GT 10 User with Switching Power Supply, US w/ detachable Power Cable, 100-240V, WW	NS-5GT-008
NetScreen-5GT Plus with Switching Power Supply, US w/ detachable power cord, 100-240V, WW	NS-5GT-108
NetScreen-5GT ADSL	
Juniper Networks NetScreen-5GT ADSL 10 User*	
NetScreen-5GT ADSL US power supply	NS-5GT-011-x
NetScreen-5GT ADSL UK power supply	NS-5GT-013-x
NetScreen-5GT ADSL Europe power supply	NS-5GT-015-A

Product	Part Number
NetScreen-5GT Wireless	
Juniper Networks NetScreen-5GT Wireless 10 User	
NetScreen-5GT Wireless US Only - US power supply	NS-5GT-021
NetScreen-5GT Wireless World* - UK power supply	NS-5GT-023
NetScreen-5GT Wireless World* - Europe power supply	NS-5GT-025
NetScreen-5GT Wireless Japan Only* - Japan power supply	NS-5GT-027-nn
NetScreen-5GT Wireless World* - US power supply	NS-5GT-028
NetScreen-5GT Wireless ADSL	
Juniper Networks NetScreen-5GT Wireless ADSL 10 User	
NetScreen-5GT Wireless ADSL US Only - US power supply	NS-5GT-031-x
NetScreen-5GT Wireless ADSL World* - UK power supply	NS-5GT-033-x
NetScreen-5GT Wireless ADSL World* - Europe power supply	NS-5GT-035-x
NetScreen-5GT Wireless ADSL World* - US power supply	NS-5GT-038-x
NetScreen-5GT Upgrades	
Anti-Virus, Deep Inspection, Web Filtering, and Anti-Spam can be purchased via subscription licenses.	
NetScreen-5GT Upgrade from 10-User to NetScreen-5GT Plus (Unrestricted user)	NS-5GT-PLU
NetScreen-5GT Upgrade from 10-User to NetScreen-5GT Extended	NS-5GT-ETU
NetScreen-5GT Upgrade from Plus to Extended	NS-5GT-EPU
Accessories	
Rack mount kit for 2 NetScreen-5GTs	NS-5GT-RMK

* World units may not be purchased in Japan or the US due to regulatory restrictions.

To order ADSL Annex A or Annex B units, replace the -x at the end of the sku with an A or B.

Please check ISP and DSLAM compatibility for the ADSL connections at www.juniper.net/products/integrated/5GT-ADSL/

Deep Inspection (DI) Signature Packs

This feature enhancement allows ScreenOS to support targeted DI signature pack optimized for your specific network deployment. You can now select the DI signature pack that improves threat prevention for your network environment to ensure detection accuracy and coverage.

Protection Type*	Deployment Type	Defense type	Attack Type
Base	Branch Offices Small/Medium Businesses	Client/Server and worm protection	Selected set of critical signatures
Client	Remote/Branch Offices	Perimeter defense, compliance for hosts (desktops, etc)	Attacks in the server- to-client direction
Server	Small/Medium Businesses	Perimeter defense, compliance for server infrastructure	Attacks in the client-to- server direction
Worm Mitigation	Remote/Branch Offices of Large Enterprises	Most comprehen- sive defense against worm attacks	Worms, Trojans, back- door attacks



**CORPORATE HEADQUARTERS
AND SALES HEADQUARTERS FOR
NORTH AND SOUTH AMERICA**
Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
Phone: 888.JUNIPER (888.586.4737)
or 408.745.2000
Fax: 408.745.2100
www.juniper.net

**EUROPE, MIDDLE EAST, AFRICA
REGIONAL SALES HEADQUARTERS**
Juniper Networks (UK) Limited
Building 1
Aviator Park
Station Road
Aldershot
Surrey, KT15 2PG, U.K.
Phone: 44.(0).1372.385500
Fax: 44.(0).1372.385501

EAST COAST OFFICE
Juniper Networks, Inc.
10 Technology Park Drive
Westford, MA 01886-3146 USA
Phone: 978.589.5800
Fax: 978.589.0800

ASIA PACIFIC REGIONAL SALES HEADQUARTERS
Juniper Networks (Hong Kong) Ltd.
26/F, Cityplaza One
1111 King's Road
Taikoo Shing, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

Copyright 2007 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. JUNOS and JUNOSe are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

**To purchase Juniper Networks solutions, please
contact your Juniper Networks sales representative
at 1-866-298-6428 or authorized reseller.**