




SANblade®

Single Port 4-Gbps Fibre Channel (FC) to
PCI-X 2.0 266-MHz Host Bus Adapter (HBA)

QLA® 2460

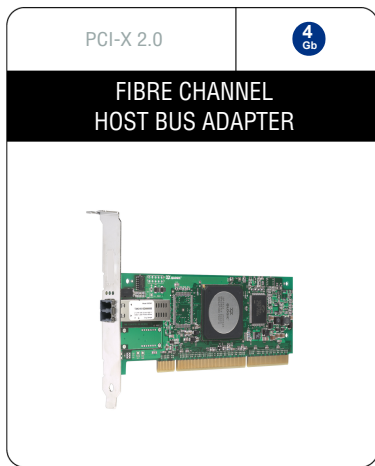

High Performance

- 150,000 IOPS delivers high I/O transfer rates for storage applications.
- Intelligent interleaved DMA (iiDMA) ensures maximum utilization of data links.
- Out-of-order frame reassembly (OoOFR) reduces congestion and retransmissions.

Superior Scalability

- Multi-ID and N_Port virtualization ready. Allows physical ports to be part of multiple logical networks.
- Cisco VSAN ready. Allows physical ports to be part of multiple logical networks.
- Comprehensive operating system (OS) driver support including Windows®, Linux™, Solaris™, and Mac OS®.
- Universal boot support manages multiple hardware platforms and boot options.

Enhanced Reliability

- Overlapping protection domains for continuous protection of internal data paths.
- T10 cyclic redundancy check (CRC) ensures end-to-end data integrity across storage area networks (SANs).
- Three LEDs display real-time status and link activity information.

- 4/2/1 Gbps (auto-negotiation)
- 2,048 concurrent logins
- SCSI initiator, target, and initiator/target modes

- Persistent binding
- HBA and target level failover
- HBA information, topology, maps, statistics, and graphs

- LUN masking
- Loopback and read/write buffer tests
- RoHS compliant

QLA2460 Host Bus Adapter. The QLA2460 is the industry's first, true enterprise class, 4-Gbps to PCI-X 2.0 HBA. The QLA2460 not only delivers unprecedented levels of performance and availability, but also intelligent networking features specific to enterprise class data centers.

Enterprise Class Features. The QLA2460 HBA is the highest performing and most reliable HBA in the industry. It delivers unmatched performance by leveraging a single ASIC design, combining a unique hardware architecture to deliver over 150,000 IOPS, nearly 800 MBps throughput, and support for the PCI-X 2.0 266-MHz DDR bus speed. More importantly, the QLA2460 HBA provides new intelligent storage networking features that redefine the enterprise class HBA, providing increased data protection, advanced frame routing, and enterprise wide management capabilities.

Simplified Setup. Point-and-click installation and configuration wizards simply the HBA setup process. Storage administrators can quickly deploy HBAs across a SAN using standard HBA management tools and device utilities. The QLA2460 is also fully compatible with industry standard application programming interfaces (APIs), including SNIA HBA API and SMI-S, thereby allowing administrators to manage QLogic HBAs using third-party software applications.

Comprehensive Operating System (OS) Support. QLogic offers the broadest range of support for all major operating systems to ensure

OS and hardware server compatibility. Drivers are available for all major operating systems, including Windows®, Linux™, Solaris™, and NetWare®, and Mac OS® X. A single driver strategy per OS allows storage administrators to easily deploy and manage HBAs in heterogeneous SAN configurations. QLogic's comprehensive driver suite supports all major hardware server platforms, including 32/64-bit computing platforms from Intel (IA32, IEM64T, IA64), AMD (Opteron 64), SUN (SPARC), and Apple® G5 (Xserve® and Power Mac®).

Guaranteed Interoperability. Storage partner certifications, combined with agency and regulatory testing, ensures all products meet world compliance hardware and software specifications. All HBAs are tested extensively with third-party hardware, along with multiple software applications, to ensure best-in-class SAN interoperability and compatibility. You can be confident purchasing QLogic HBAs to meet your FC storage networking needs.

Investment Protection. For over 15 years, QLogic has been a technological leader with products that address the current needs of customers, yet provide strong investment protection to support emerging technologies and standards. QLogic stands alone in the industry with its product portfolio depth and experience in successfully delivering technological solutions that address the needs of today and tomorrow.

Host Bus Interface Specifications

Bus interface	64-bit, PCI-X 2.0 266-MHz DDR, compatible with 66/33-MHz PCI and 133/100/66-MHz PCI-X
Signal voltage	3.3V (mode 1), 3.3V/1.5V (mode 2)
Memory	1-MB SRAM, 1-MB flash (SPI), and 2-KB NVRAM (SPI)
HW platforms	IA32 (x86), IA64, IEM64T, AMD Opteron 64, Sun SPARC, Apple G5 (Xserve and Power Mac)
Compliance	Conforms to <i>PCI Local Bus Specification</i> , revision 2.3, <i>PCI-X Protocol Addendum to the PCI Local Bus Specification</i> , revision 2.0a, <i>PCI-X Electrical and Mechanical Addendum</i> (revision 2.0a) to the <i>PCI Local Bus Specification</i> , <i>PCI Bus Power Management Interface Specification</i> revision 1.1, <i>PCI Hot Plug Specification</i> , revision 1.0

Fibre Channel Specifications

Data rate	4/2/1 Gbps auto-negotiation (4.2480/2.1240/1.0625 Gbps)
Performance	150,000 IOPS
Topology	Point-to-point (N_Port), arbitrated loop (NL_Port), and switched fabric (N_Port)
Logins	Support for F_Port and FL_Port login. 2,048 concurrent logins and 2,048 active exchanges
Class of service	Class 2 and 3
Protocols	FCP (SCSI-FCP), IP (FC-IP), FC-TAPE (FCP-2)
Compliance	<i>SCSI-3 Fibre Channel Protocol (SCSI-FCP)</i> , <i>Fibre Channel Physical and Signaling Interface (FC-PH)</i> , <i>Fibre Channel 2nd Generation (FC-PH-2)</i> , <i>Third Generation Fibre Channel Physical and Signaling Interface (FC-PH-3)</i> , <i>Fibre Channel-Arbitrated Loop (FC-AL-2)</i> , <i>Fibre Channel Fabric Loop Attachment Technical Report (FC-FLA)</i> , <i>Fibre Channel-Private Loop Direct Attach Technical Report (FC-PLDA)</i> , <i>Fibre Channel Tape (FC-TAPE) profile</i> , <i>SCSI Fibre Channel Protocol-2 (FCP-2)</i> , <i>Second Generation FC Generic Services (FC-GS-3)</i> , <i>Third Generation FC Generic Services (FC-GS-3)</i> , <i>Fibre Channel Framing and Signaling (FC-FS)</i>

Physical Specifications

Ports	Single 4-Gbps FC
Connections	Small form factor fixed (SFF) multimode optic with LC-style connector
Form factor	Low-profile MD2: 16.93 cm x 5.15 cm (6.7 in. x 2.5 in.)
Bracket size	Standard: 1.84 cm x 12.08 cm (.73 in. x 4.76 in.); Low-profile: 1.84 cm x 8.01 cm (.73 in. x 3.15 in.)

Environment and Equipment Specifications

Airflow	—
Temperature	Operating: 0°C/32°F to 55°C/131°F. Storage: -20°C/-4°F to 70°C/158°F
Humidity	Relative (non-condensing): 10% to 90%, Storage: 5% to 95%
Power dissipation	6.5 W (maximum)
Cable distances	1 Gbps: 500 meters 50/125 µm fiber, 300 meters 62.5/125 µm fiber 2 Gbps: 300 meters 50/125 µm fiber, 150 meters 62.5/125 µm fiber 4 Gbps: 150 meters 50/125 µm fiber, 70 meters 62.5/125 µm fiber

Agency Approvals—Product Safety

US/Canada	UL, cUL UL60950 CSA C22.2 No.60950 Class 1 Laser Product per DHHS 21CFR J
Europe	73/23/ECC Low Voltage Directive: TUV: EN60950-1: 2001 EN60825-1: 1994+A1+A2 EN60825-2: 1994 +A1

Agency Approvals—EMI and EMC

US	FCC Part 15, Class A
Canada	Industry Canada ICES-003, Class A
Europe	89/336/EEC EMC Directive CE Mark: EN55022: 1998 /CISPR22:1997 Class A EN55024: 1998 EN61000-3-2:1995 EN61000-3-3:1994 VCCI, Class A
Japan	CNS 13438 Class A
Taiwan	AS/NZS 3548 Class A
New Zealand/Australia	MIC
Korea	

Tools and Utilities

Management tools	FC HBA Manager
Device utilities	Command line interface; utilities for firmware, driver, boot code, and NVRAM
Boot support	BIOS, EFI, and FCode
APIs	SNIA HBA API V2, SMI-S, and FDMI
Operating systems	Windows® Server™ 2003; Windows 2000; Windows XP Pro; Solaris 8, 9, 10; Linux Red Hat AS 3.0, 4.0; Linux SuSE SLES 8, 9; Novell NetWare 6.5; Mac OS X

Ordering Information

QLA2460-CK	Ships in an individually packed box with a standard size bracket and a spare low-profile bracket, FC HBA Manager CD, and Quick Start Guide
QLA2460-BK	Ships in a bulk box in quantities of 20 and 50 with standard size brackets



QLogic Corporation
26650 Aliso Viejo Parkway
Aliso Viejo, CA
92656
949.389.6000

QLogic (UK) Ltd.
Surrey Technology Centre
40 Occam Road, Guildford
Surrey GU2 7YG UK
+44 (0) 1483 295825

WWW.QLOGIC.COM

© 2004–2006 QLogic Corporation. Specifications are subject to change without notice. All rights reserved worldwide. QLogic, the QLogic logo, QLA, and SANblade are registered trademarks of QLogic Corporation. SANtrack is a trademark of QLogic Corporation, which may be registered in some jurisdictions. All other brand and product names are trademarks or registered trademarks of their respective owners. Information supplied by QLogic Corporation is believed to be accurate and reliable. QLogic Corporation assumes no responsibility for any errors in this brochure. QLogic Corporation reserves the right, without notice, to make changes in product design or specifications.